

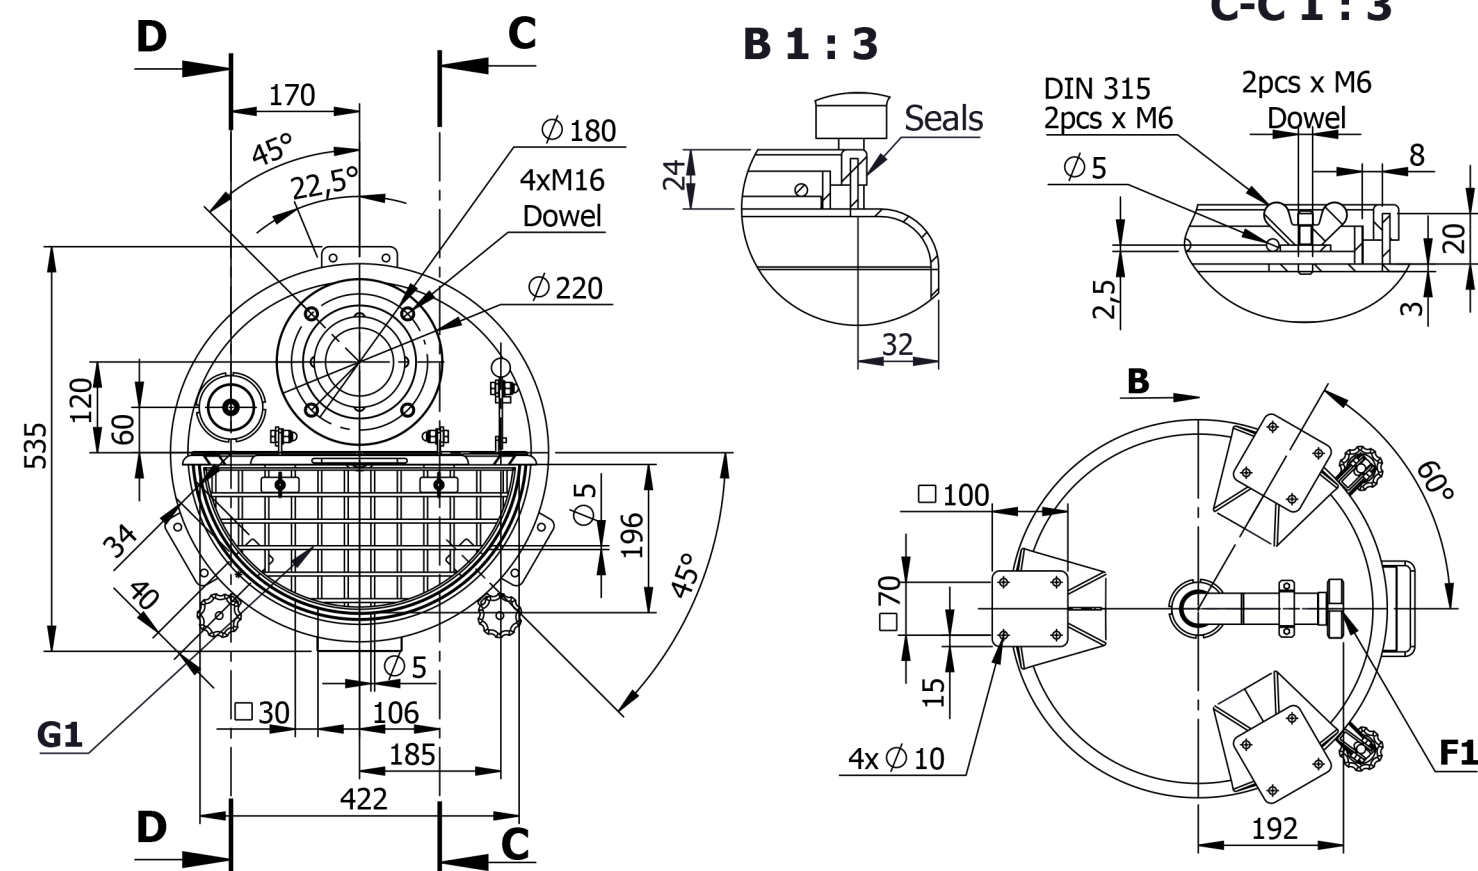


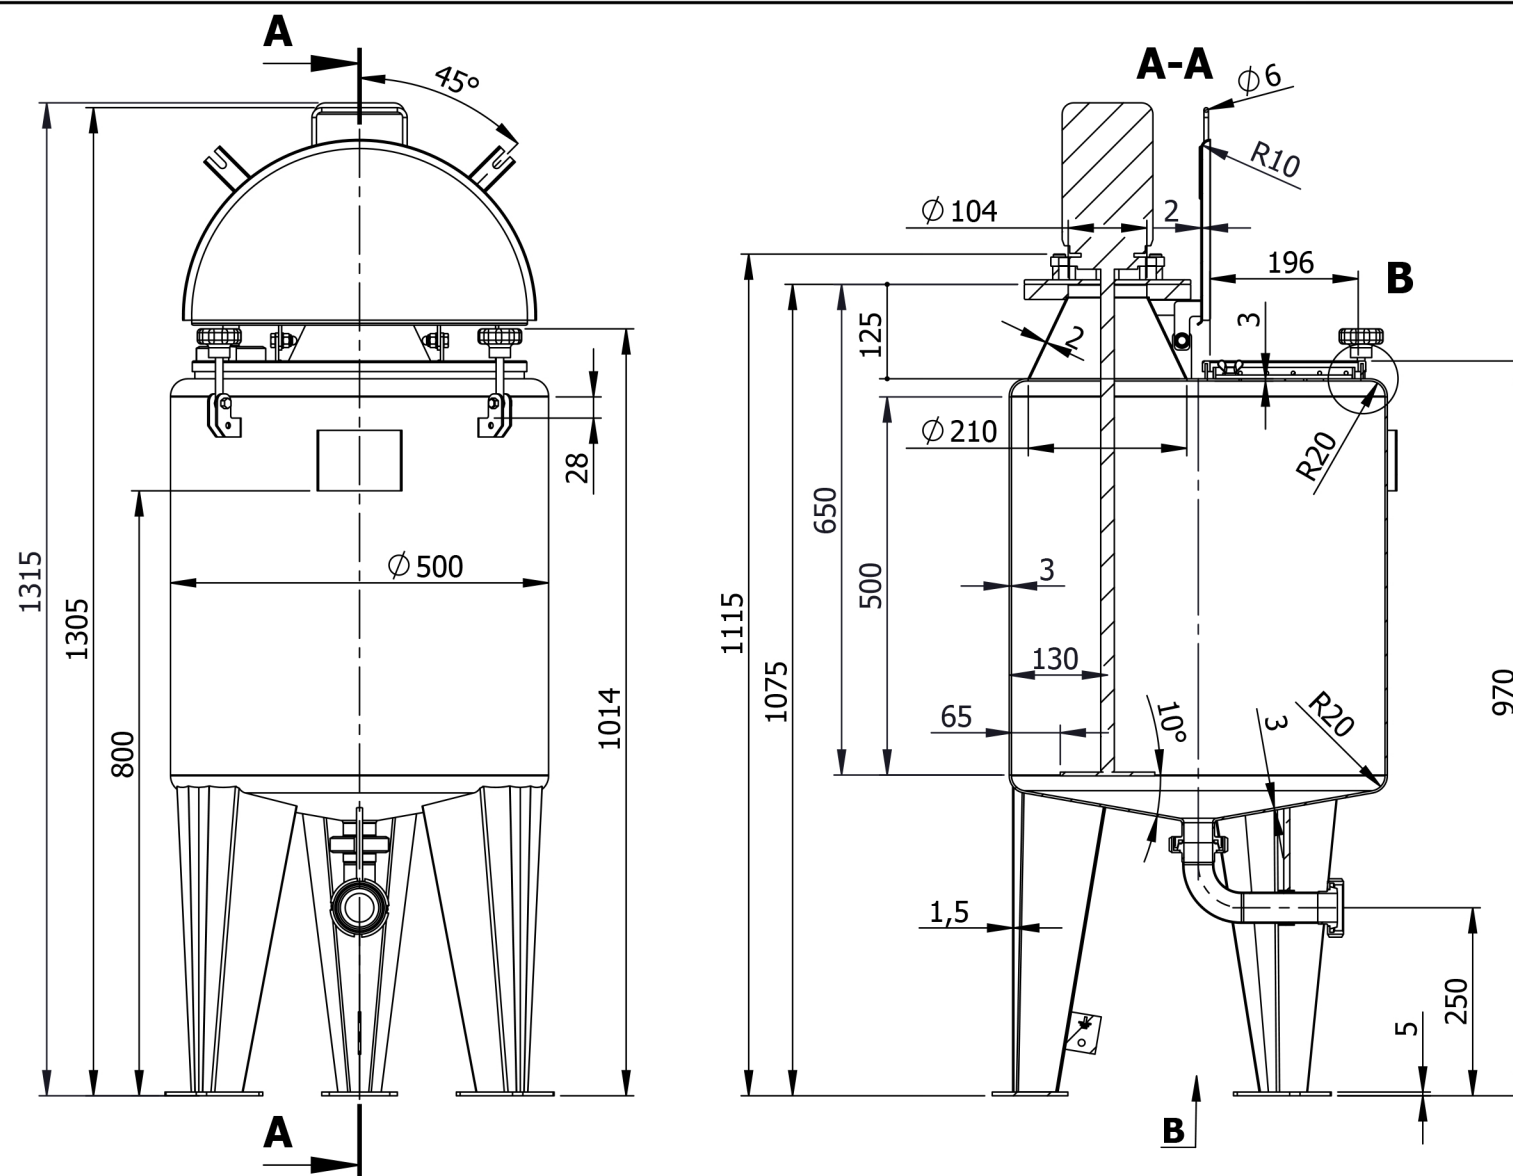


Agitator Schnellmischer

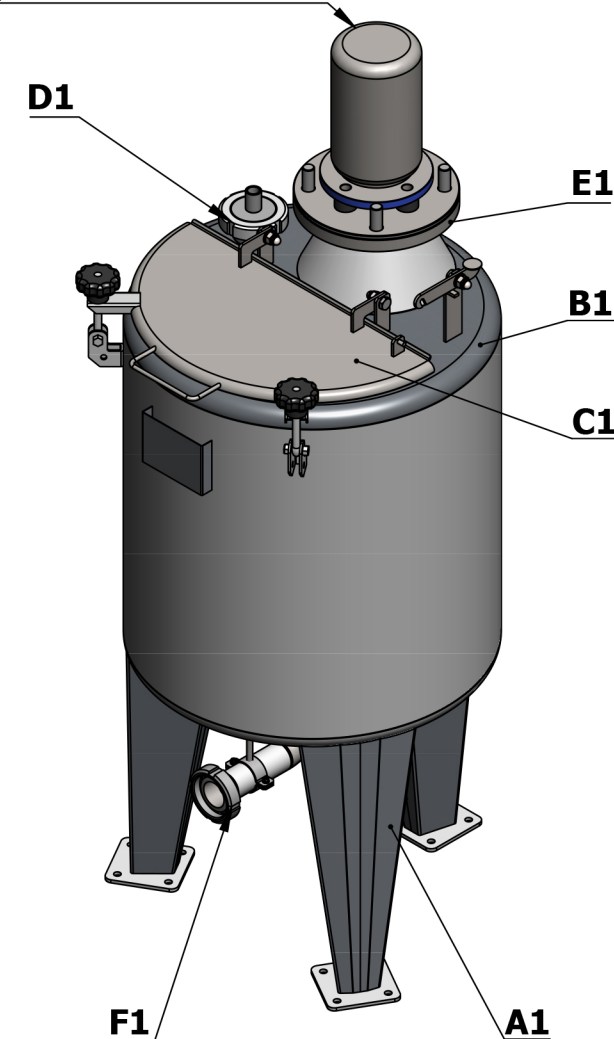

Construction date: 2015	Capacity: 100 L
Material vessel: AISI 316/AISI 304	Workpressure: ATM
Workpressure: ATM	Workpressure: coll:
Maximal density: 1,2 kg/dm³	

D-D 1 : 8

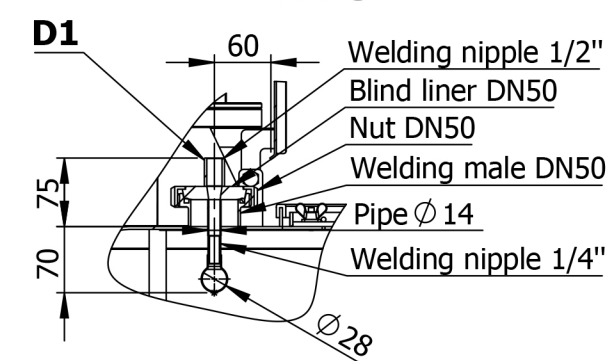

Schnellmischer:

1. RW9532V6N 0,25kW 1500rpm 400V
2. RW9533V6N 0,12kW 680rpm 400V

Item	Description	PN	DN	Qty.
		MPa	mm.	
A1	LEG ON ANCHOR PLATE (anchor bolts are not included) - AISI 304	-	-	3
B1	1/2 FIXED LID - AISI 316	-	-	1
C1	1/2 HINGED LID - AISI 316	-	-	1
D1	DISMOUNTABLE STATIC CIP SPRAY BALL Ø28 360° UP TO WELDING MALE NIPPLE - AISI 316	atm.	G1/2"	1
E1	INLET FOR AGITATOR UP TO FLANGE Ø 220mm s20mm - AISI 316	atm.	100	1
F1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DIN 11851 - AISI 316	atm.	40	1
G1	SAFETY GRID ON HINGED LID - AISI 316	-	-	1
Surface		Outside	2B	strip grinded to Ra<1,6
		Inside	2B	
		Welding seam		flat grinded to Ra<0,8
1.6		min.0,5x45°	Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006	
Drawn.: K.N		Scale 1:10	Mass 71.3	AISI 316
Check: K.I				AISI 304
Eng.App.: D.M				
				0,1m3
				30.3.2015 r.
				Sheet 1/1