
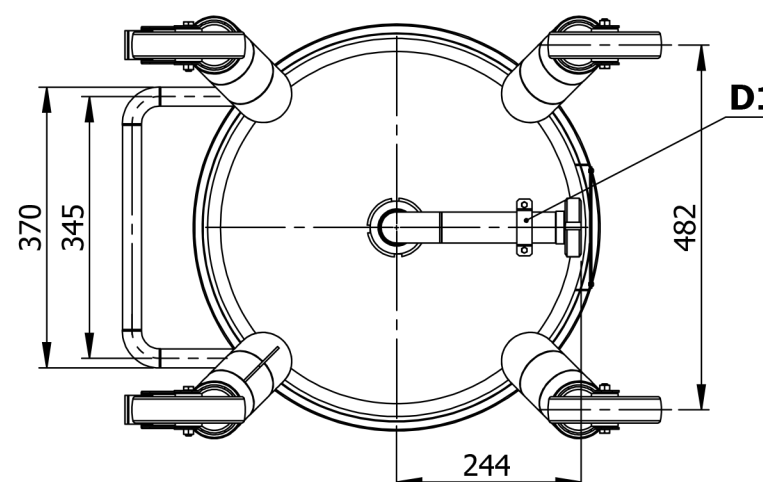
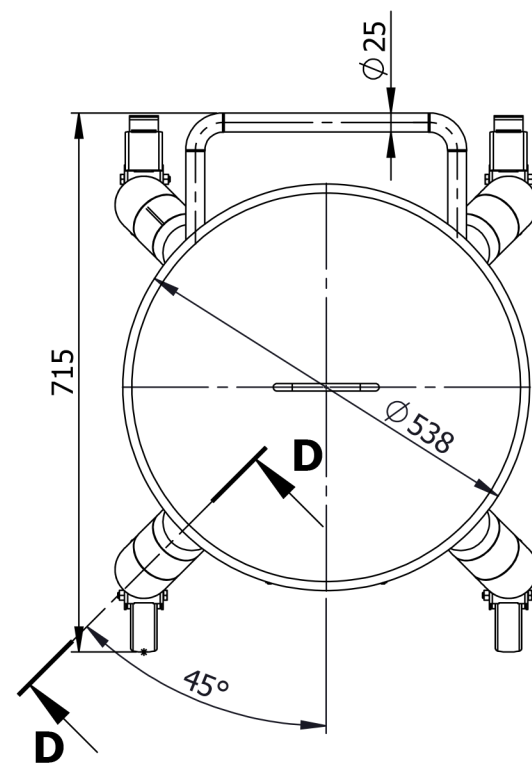
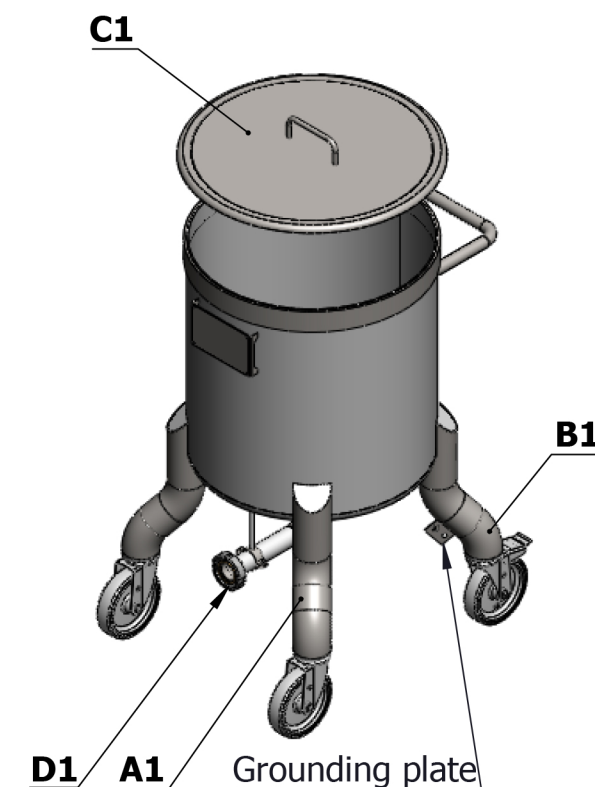
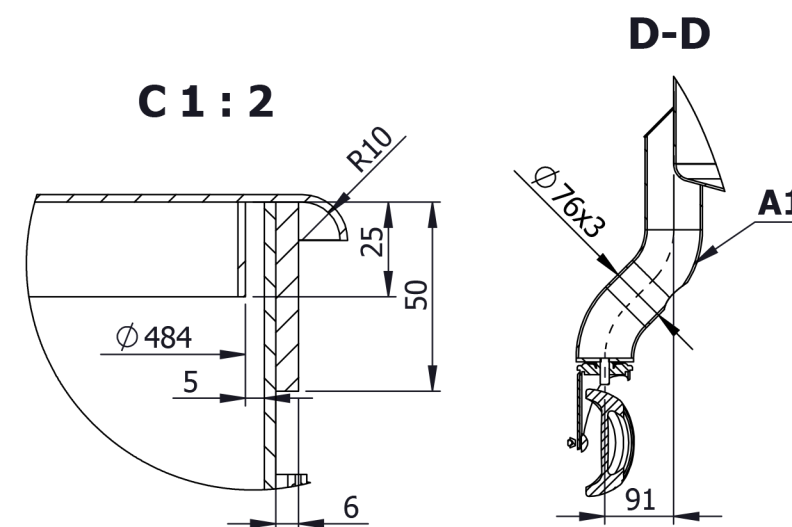
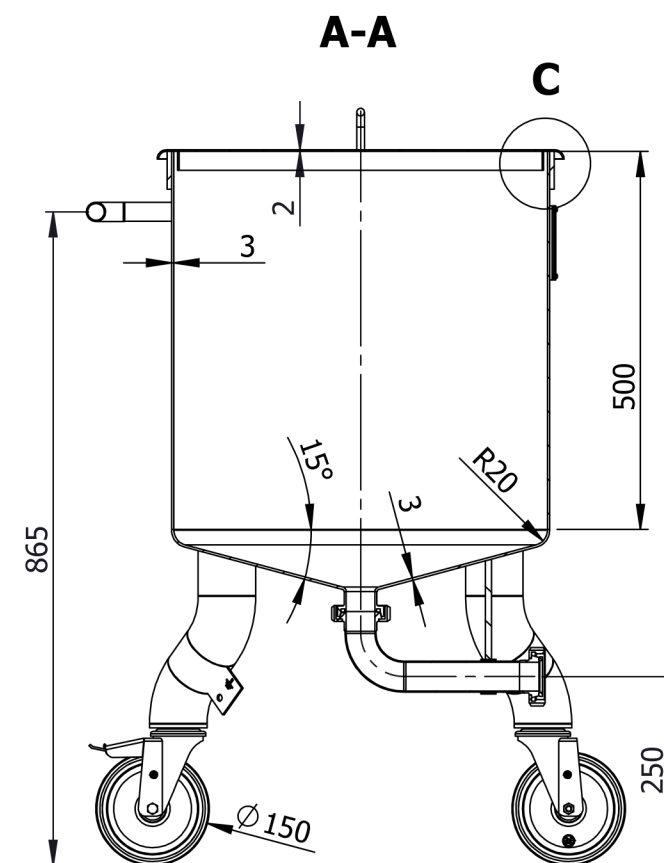


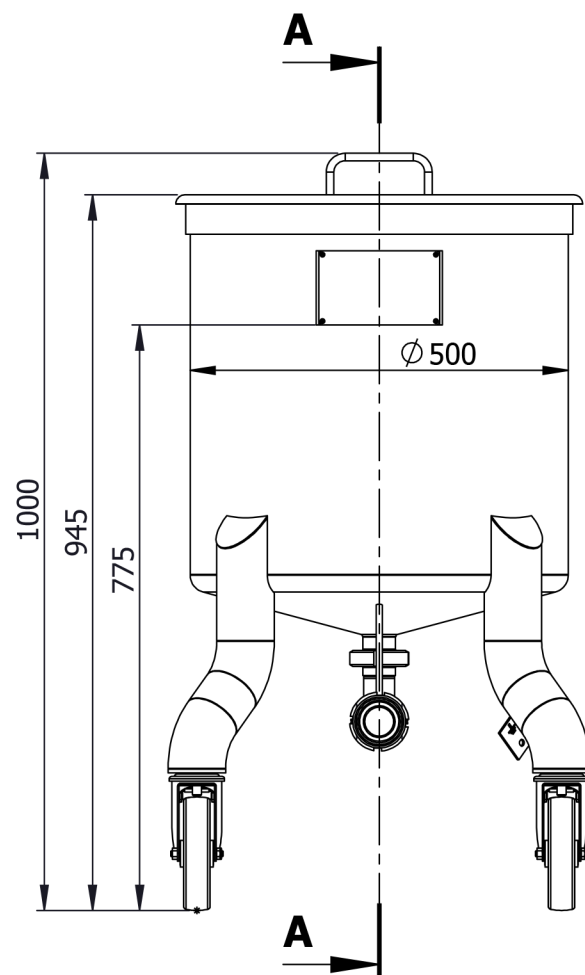

160	
98	
Geometrical volume	100 ℓ
Working pressure	Atmospheric
Working temperature	-10/80°C
Maximum density	1.2kg/dm³
Tare mass	47 kg
Equipment output/voltage	-
Geometrical volume - jacket	-
Working pressure - jacket	-
Working temperature - jacket	-
Jacket pressure drop	-
Material	AISI 304L / AISI 316L
Year of manufacture	2016

Item	Description	PN MPa	DN mm.	Qty.
A1	TUBULAR LEG ON WHEEL WITHOUT BREAK - AISI 304L	-	-	2
B1	TUBULAR LEG ON WHEEL WITH BREAK - AISI 304L	-	-	2
C1	DUST PROTECTIVE LID 2mm - AISI 316L	-	-	1
D1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DIN 11851 - AISI 316L	atm.	40	1

Surface	Outside	2B	Welding seam	Outside	Strip grinded 2x20 Ra<1,6
	Inside	2B		Inside	Flat grinded to Ra<0,8

1.6	min.0,5x45°	Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006			
-----	-------------	--	--	--	--

Drawn: K.N.	Scale 1:10	Weight 46.4	AISI 316L AISI 304L	
Checket: K.I.				
Approved by: D.M.				

20.11.2015 r.	lang eng	Sheet 1/1
---------------	-------------	--------------