
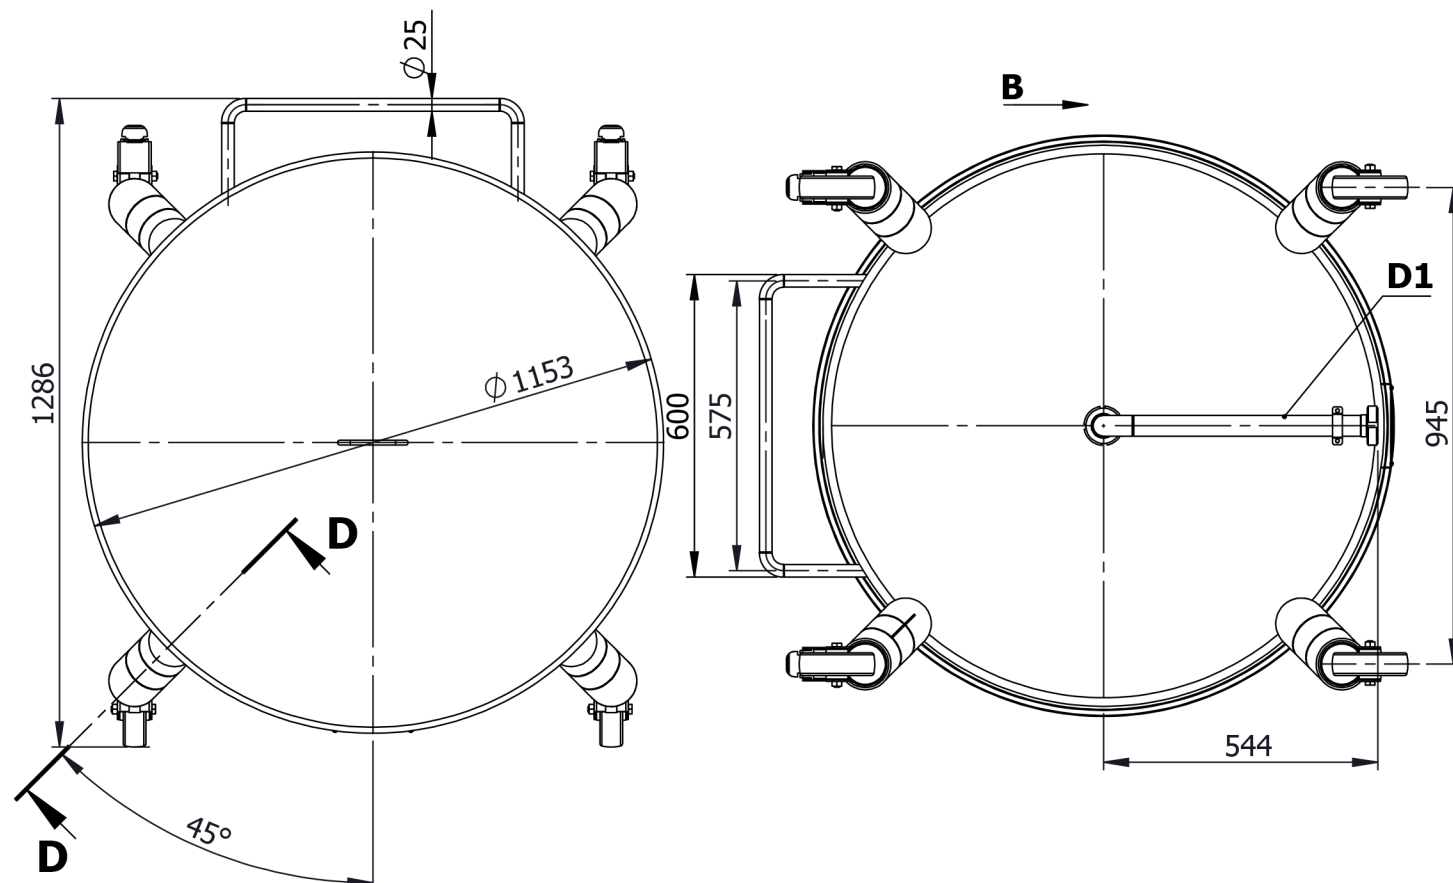
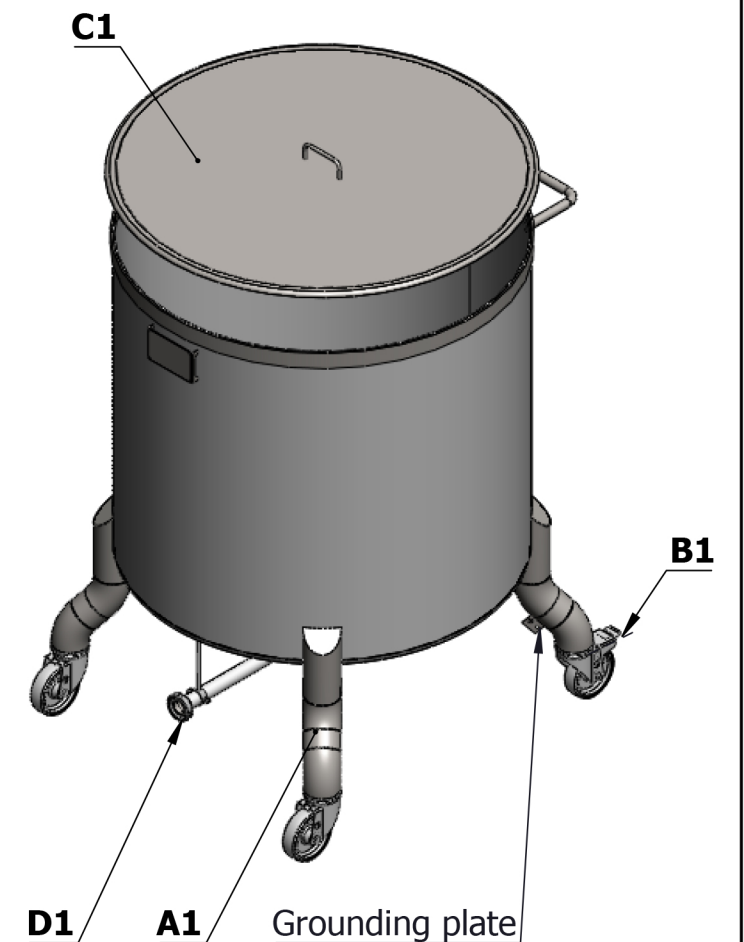
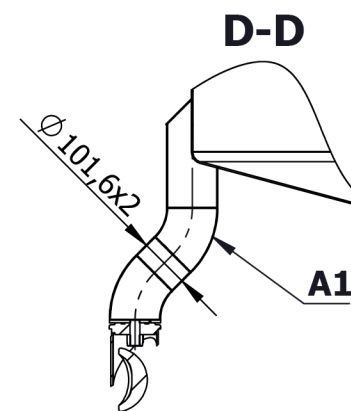
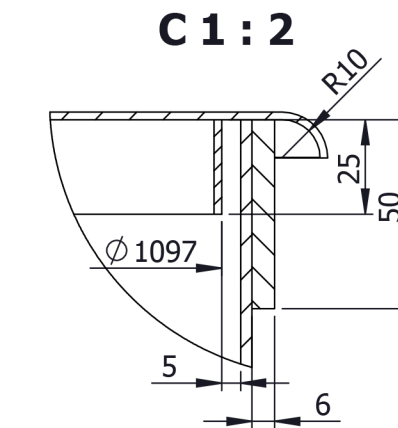
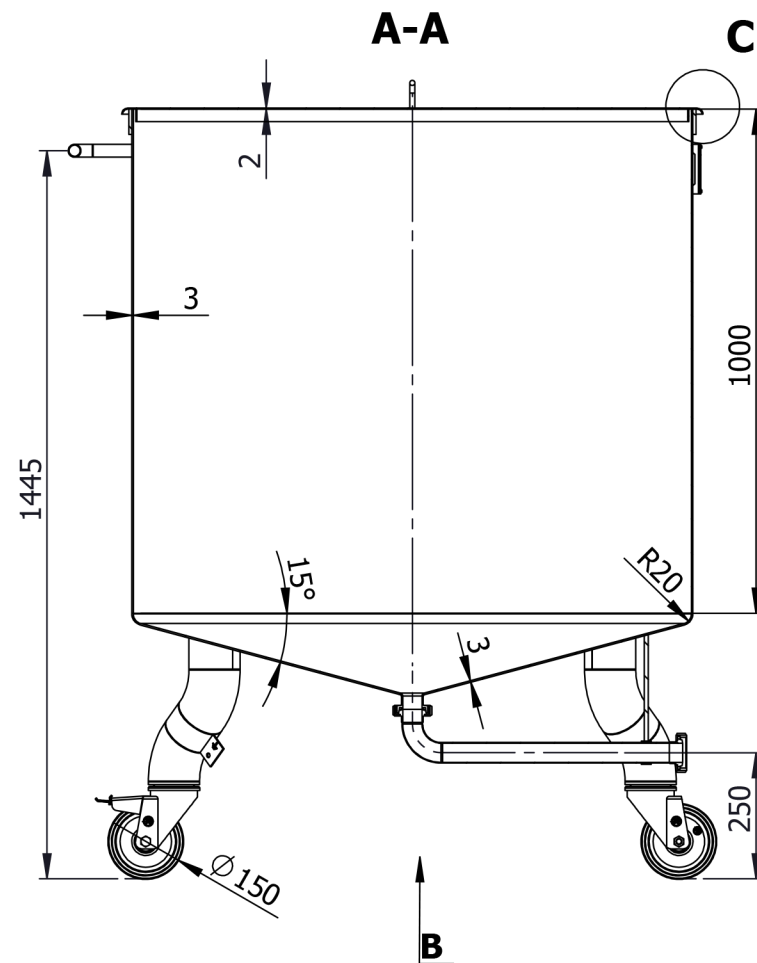


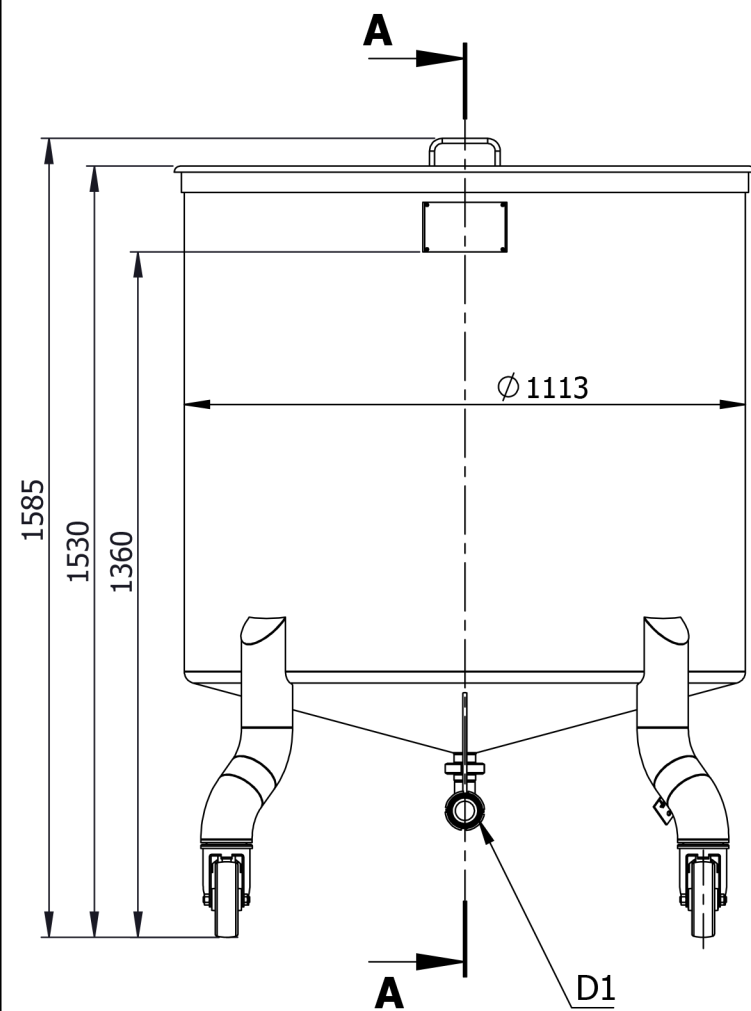

160		160	
		98	
Geometrical volume		1000 l	Geometrical volume - jacket
Working pressure		Atmospheric	Working pressure - jacket
Working temperature		-10/80°C	Working temperature - jacket
Maximum density		1.2kg/dm³	Jacket pressure drop
Tare mass		172 kg	Material
Equipment output/voltage		-	Year of manufacture
			2016

Item	Description	PN	DN	Qty.
		MPa	mm.	
A1	TUBULAR LEG ON WHEEL WITHOUT BREAK - AISI 304L	-	-	2
B1	TUBULAR LEG ON WHEEL WITH BREAK - AISI 304L			2
C1	DUST PROTECTIVE LID AISI 316L	-	-	1
D1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT - AISI 316L	atm.	40	1

Surface	Outside	Matt 2B	Welding seam	Outside	Strip grinded 2x20 Ra<1,6
	Inside	Matt 2B		Inside	Flat grinded to Ra<0,8
1.6		 min.0,5x45°	Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006		
	Drawn: K.N.	Scale 1:15	Weight 171.1	AISI 316L AISI 304L	
	Checket: K.I.	1m3			
	Approved by: D.M.			20.11.2015 г.	lang eng Sheet 1/1