
# 1000 liter tank i 904 L

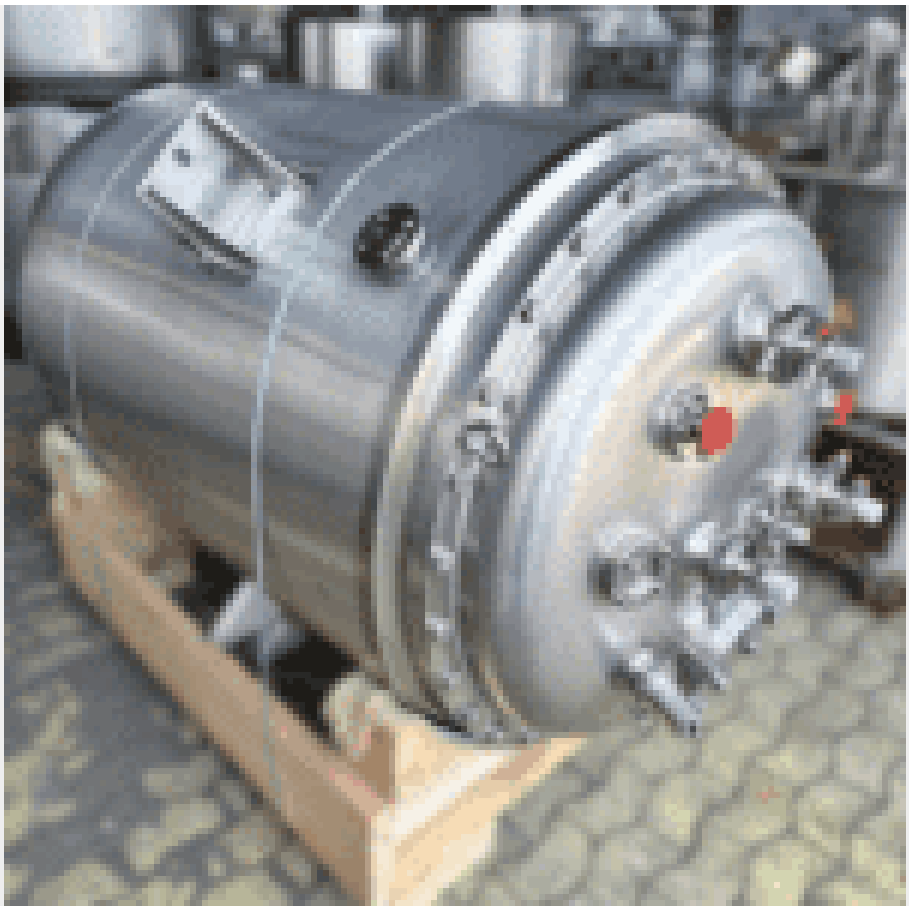

300 000 SEK /st exkl moms

**Additional information**: Apparatus was manufactured for a global pharmaceutical company but never put into operation there; hand hole with sight glass diameter: 285mm; incl. Südmo single seat valve SVP (outlet)
**Volumetric volume (L)**: 1.000 L
**Pressure in tank**: pressure and vacuum
**Max. pressure (Bar)**: 6 Bar

**PROCESSÖVERSKOTT AB**

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

**Min. pressure (Bar)**: 1 Bar

**Max. temperature (°C)**: 150 °C
**Material wet parts**: SS AISI 316L (V4A)
**Model**: vertical
**Configuration**: insulated
**Heat exchanger**: no

**Insulation**: yes
**Mobile tank**: no
**Total discharge**: yes
**Volume**: 60 L
**Max Overpressure**: 10 Bar

**Max onderdruk**: 1 Bar
**Max. working temperature**: 150 °C
**Type HE on the cylinder**: half pipe welded onto the outside of the innertank
**Documents included**: no
**Technical drawing included**: no

**Registration plate on the tank**: yes
**Flange for agitator**: no
**Outlet of tank**: available
**Top**: 4,50 mm
**Cylinder**: 6 mm

**Bottom**: 4 mm
**Internal diameter tank**: 1.000 mm
**Outer diameter tank**: 1.194 mm
**Cylinder height**: 1.332 mm
**Empty weight tank**: 800

**SKU:** 458252

# Mer information

**Beskrivning av produkt**

Material: Syrafast 316
Modell: Vertikal
Nytillverkad/Begagnad: Begagnad
Arbetstryck i tank: pressure and vacuum
Konfiguration: insulated with heat-exchanger
Max. arbetstemperatur: 150 °C
Mobil tank: Nej
Övrig information: Tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass diameter: 285mm; incl. Südmo single-seat valve SVP (outlet); we can’t give any
Övrig information2: guarantees about the heating/cooling jacket
Omrörare: Nej
Övertryck: 6 Bar
Total urtappning: Yes
Undertryck (vakuum): 1 Bar
Trycktank: Ja
Uppvärmning/kylning: Ja
Vätskeberörd yta: SS AISI 316 (V4A)
Volym i liter: 1000

**Utrustning**

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Ja
Teknisk ritning finns: Nej

**Översikt material**

Material: Syrafast 316



Rodervägen 57
891 78 Bonässund
info@processoverskott.se

**Dimensioner av tank**

Cylinderhöjd: 1.332 mm
Invändig diameter: 1.000 mm
Ytterdiameter: 1.194 mm

**Tjocklek på tank**

Botten: 4 mm
Cylinder: 6 mm
Topp: 4,50 mm

**Mer**

Isolerad: Ja
Vikt: 800