


10000 liter tank i Rostfritt 304

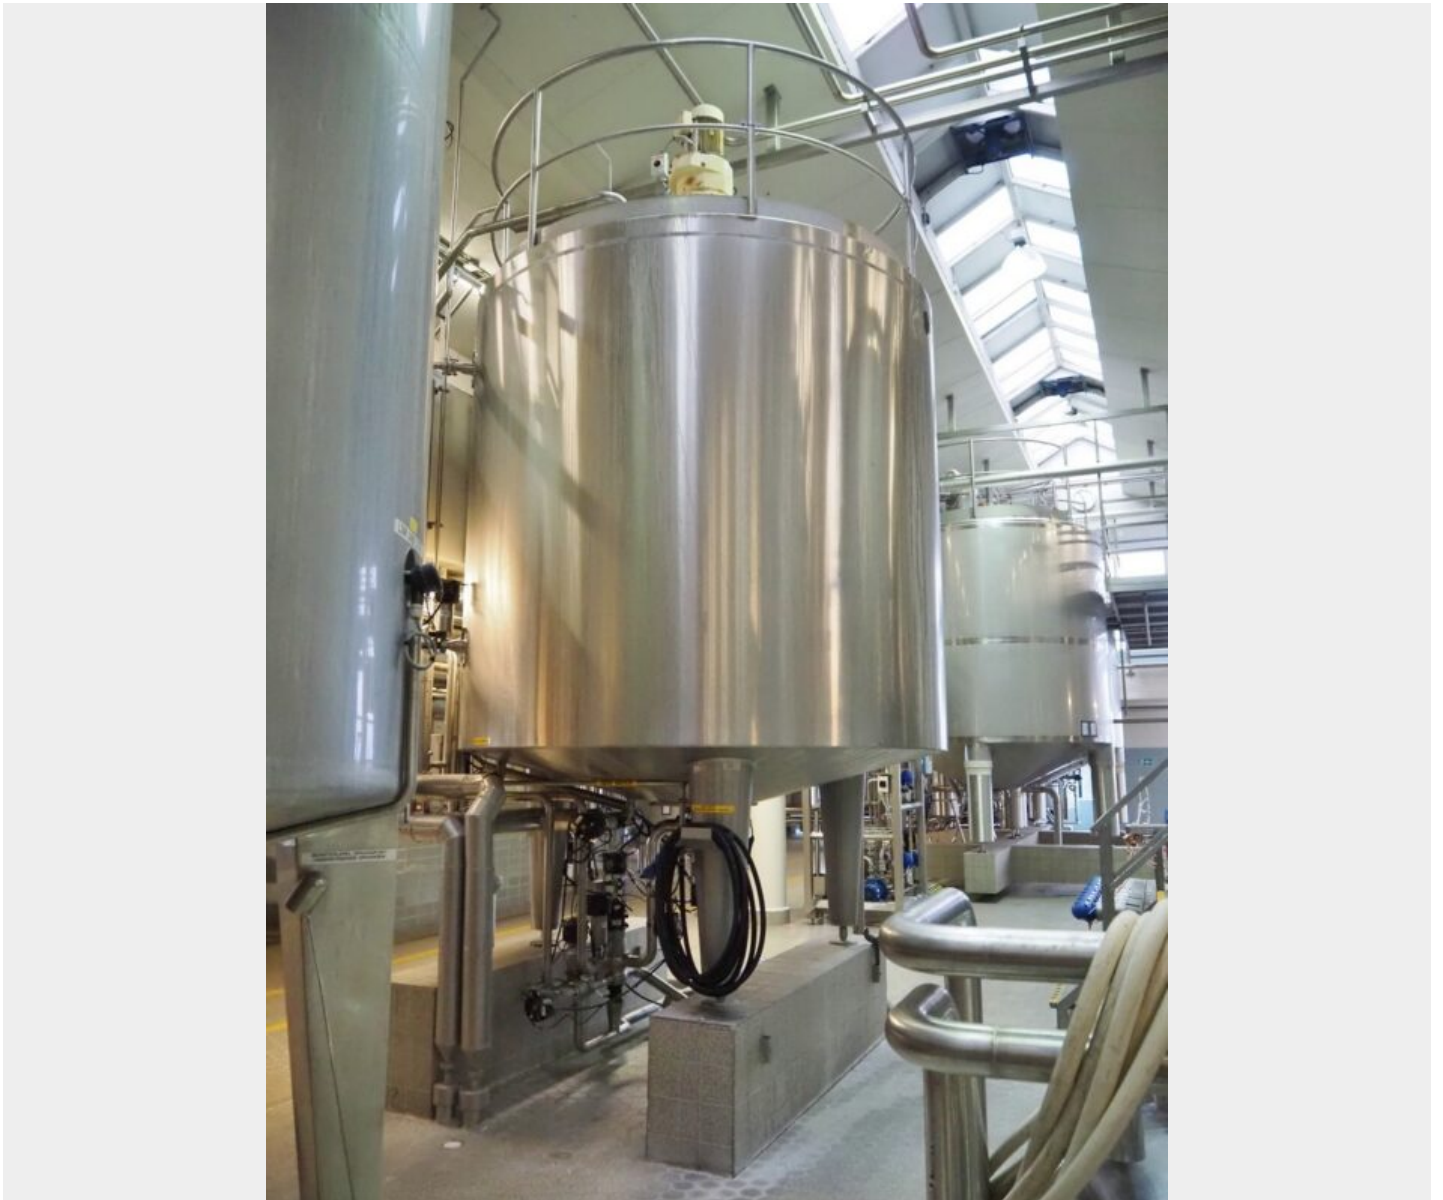

243 000 SEK /st exkl moms

Additional information: Food industry; 1 loose railing and 1 pallet with various fittings are included in the scope of delivery (see photos); these attachments were not taken into account when specifying the total height; fittings could also extend beyond the foot ends when used, so that the feet would have to be supported accordingly when using these fittings (see photo of previous installation)

Volumetric volume (L): 10.000 L

Pressure in tank: ATM - atmospheric

Material wet parts: SS AISI 304 (V2A)

Model: vertical

Configuration: insulated with heat-exchanger

Heat exchanger: yes

Insulation: yes

Mobile tank: no

Total discharge: yes

Max orderdruk: 3 Bar

Type HE on the bottom: half pipe welded onto the outside of the innertank

Type HE on the cylinder: half pipe welded onto the outside of the innertank

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: in the bottom

Outlet of tank: available

Agitator: yes

Number of revolutions: 16 / 32

Power: 1.8 / 3.3

Internal diameter tank: 2.450 mm

Outer diameter tank: 2.650 mm

Cylinder height: 2.000 mm

Total height of tank: 5.100 mm

SKU: 315128

Mer information

Beskrivning av produkt

Material: Rostfritt 304

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetstryck i tank: ATM – atmosferic

Konfiguration: insulated with heat-exchanger

Mobil tank: Nej

Övrig information: Food industry; 1 loose railing and 1 pallet with various fittings are included in the scope of delivery (see photos); these attachments were not taken into account when specifying the total height;

Övrig information2:

Omrörare: Ja

Total urtappning: Ja

Uppvärmning/kylning: Ja

Vätskeberörd yta: SS AISI 304 (V2A)

Volym i liter: 10000

Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej

Översikt material

Material: Rostfritt 304

Dimensioner av tank

Cylinderhöjd: 2.000 mm
Invändig diameter: 2.450 mm
Total höjd: 5.100 mm
Ytterdiameter: 2.650 mm

Omrörare

Kraft (kW): 1.8 / 3.3
Varvtal: 16 / 32

Mer

Isolerad: Ja