


10000 liter tank i Syrafast 316

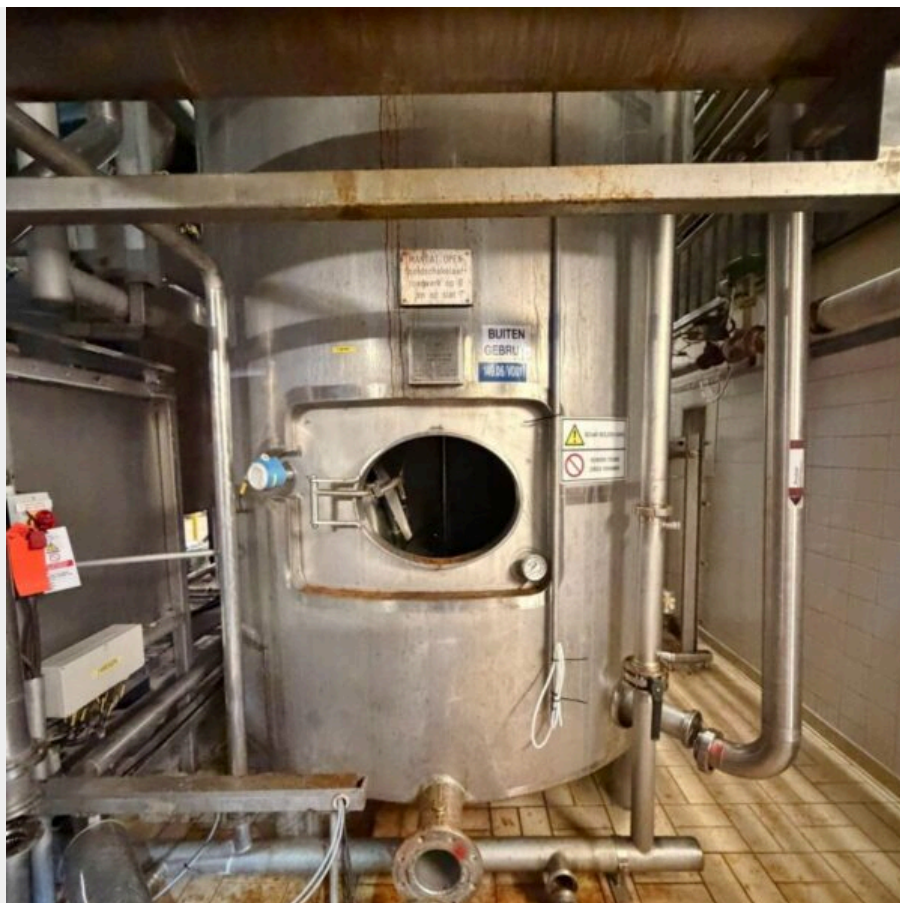

201 000 SEK /st exkl moms

Additional information: Manhole approx. 500 x 400 mm; total height as specified includes railing; 1 sheet metal cutout in the insulation jacket of the lower floor; 1 square stainless steel plate was subsequently welded into the insulation jacket (see photos)

Volumetric volume (L): 10.000 L

Pressure in tank: ATM - atmospheric



Max. temperature (°C): 80 °C

Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: insulated

Heat exchanger: no

Insulation: yes

Mobile tank: no

Total discharge: yes

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: cylinder

Outlet of tank: flange DN125

Agitator: yes

Number of revolutions: 15 / 32

Power: 1.2 / 2.2

Top: 3 mm

Cylinder: 3 mm

Bottom: 4 mm

Internal diameter tank: 2.050 mm

Outer diameter tank: 2.150 mm

Cylinder height: 3.250 mm

Total height of tank: 5.700 mm

SKU: 703229



Mer information

Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: ATM – atmosfäric

Konfiguration: insulated

Max. arbetstemperatur: 80 °C

Mobil tank: Nej

Övrig information: Manhole diameter: approx. 530 x 430 mm; dimensions as shown in the drawing (without agitator); we can't give any guarantees about the agitator

Övrig information2: into the insulation jacket (see photos); we can't give any guarantees about the agitator

Omrörare: Ja

Total urtappning: Ja

Uppvärmning/kylning: Nej

Vätskeberörd yta: SS AISI 316L (V4A)

Volym i liter: 10000

Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej

Översikt material

Material: Syrafast 316

Dimensioner av tank

Cylinderhöjd: 3.250 mm

Invändig diameter: 2.050 mm

Total höjd: 4.200 mm

Ytterdiameter: 2.150 mm

**Omrörare**

Kraft (kW): 1.2 / 2.2

Varvtal: 15 / 32

Tjocklek på tank

Botten: 4 mm

Cylinder: 3 mm

Topp: 3 mm

Mer

Isolerad: Ja