
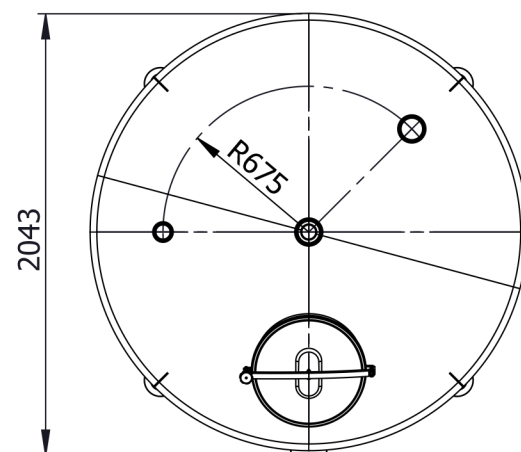
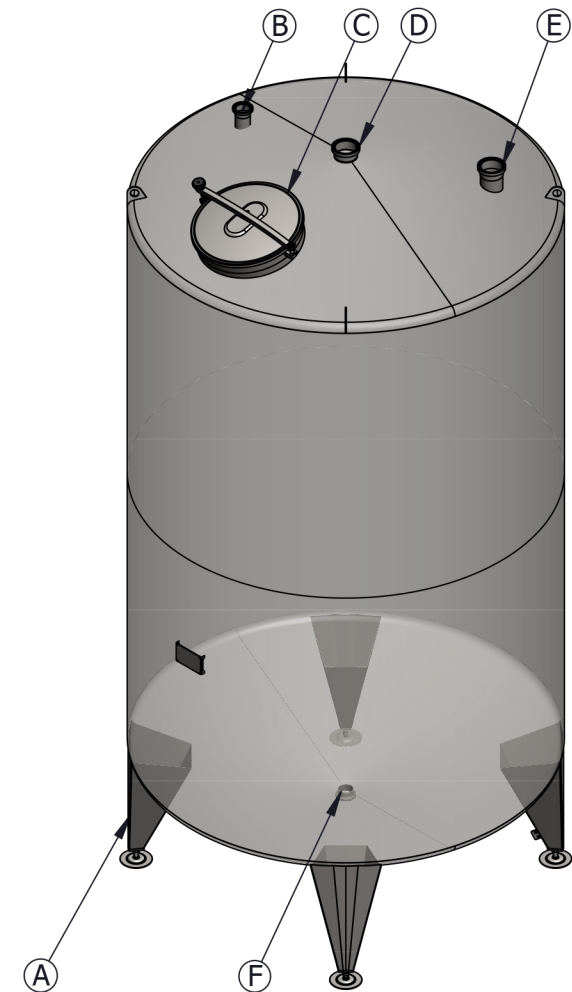
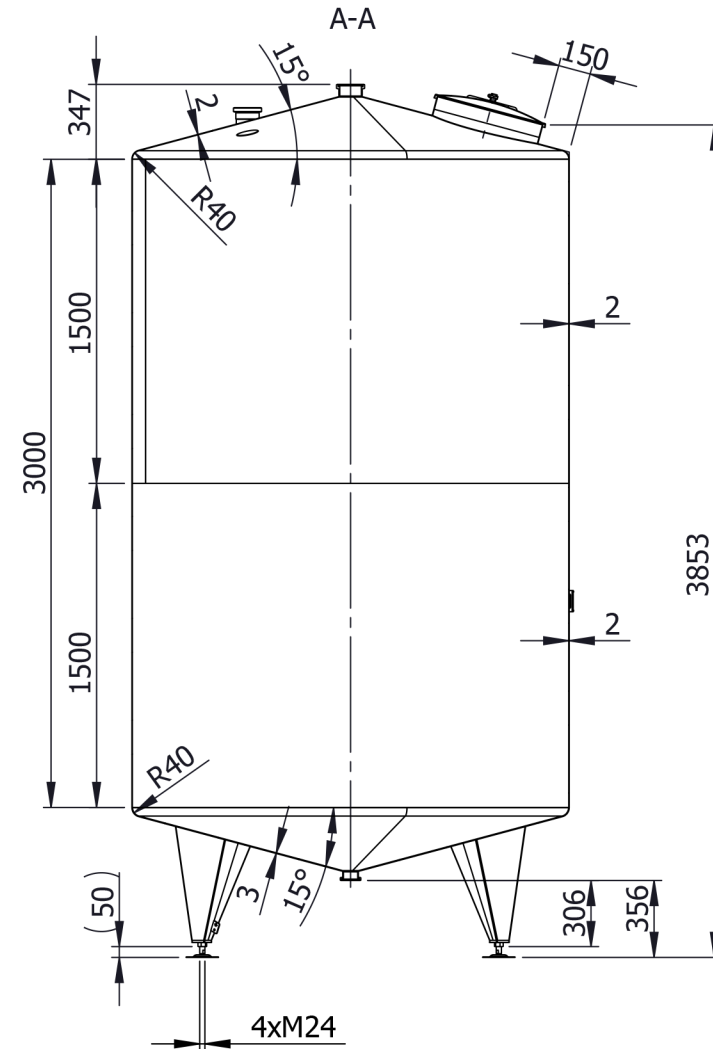


4		3		2		1	
Revisions							
Rev	Description			Zone	Date	Drawn	Checked

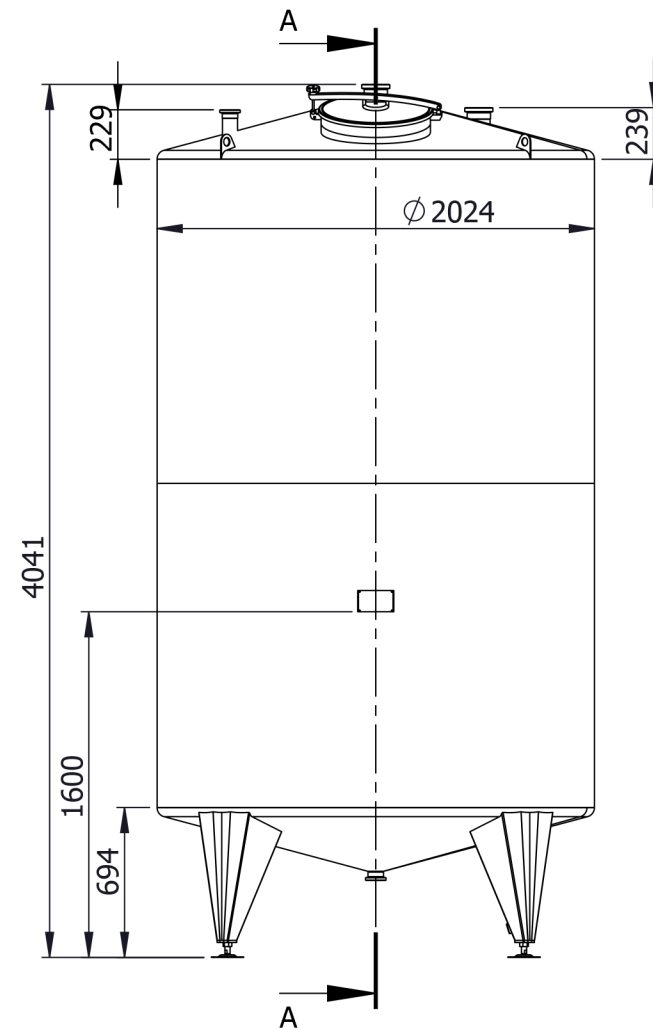

Geometrical volume	10300 l	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	484 kg	Material	1.4404 / AISI 316L
Equipment output/voltage	-	Year of manufacture	
			

Item	Description	PN	DN	Qty.
		bar	mm.	
A	LEG ON ADJUSTABLE SUPPORT	-	-	4
B	INLET DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN 11851	atm.	65	1
C	UPPER MANHOLE DN500 Elica art. 50/1p-6 WITH EPDM-FDA-GASKET	atm.	500	1
D	INLET DN100 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN100 DIN 11851	atm.	100	1
E	INLET AIR VENT DN100 ON TANK TOP UP TO WELDING MALE DN100 DIN 11851	atm.	100	1
F	TOTAL OUTLET DN65 UP TO WELDING MALE DN65 DIN 11851	atm.	65	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside		Matt 2B		Weld. seams	Outside		Strip grinded 2x20 Ra<1,6 Flat grinded to Ra<0,8
	Inside		Matt 2B			Inside		

1.6 	Drawn: S.S.	Scale 1:35	Weight 484	1.4404 AISI 316L			
	Checked: K.I.	10300L					
	Approved: D.M.			Rev	13.5.2019 г.	Lang Eng	Sheet 1/1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12
Surface		Outside		Matt 2B				Weld. seams		Outside		Strip grinded 2x20 Ra<1,6			
		Inside		Matt 2B						Inside		Flat grinded to Ra<0,8			
1.6 			Drawn: S.S.				Scale 1:35	Weight 484	1.4404 AISI 316L						
			Checked: K.I.				10300L								
			Approved: D.M.									Rev	13.5.2019 г.	Lang Eng	Sheet 1/1