


125000 liter tank i Rostfritt 304

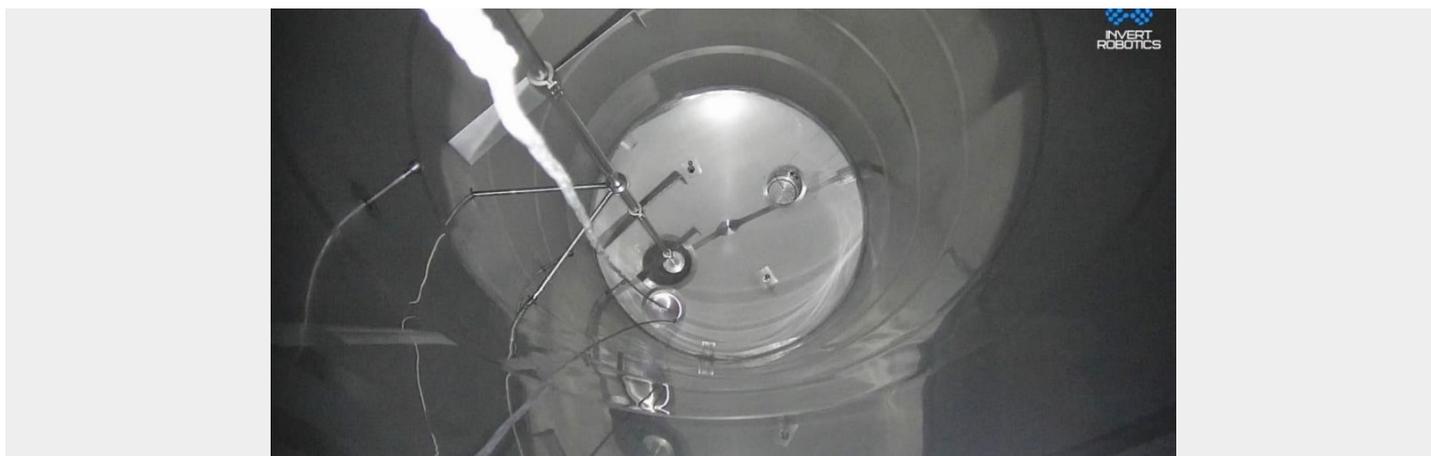

604,000,00 kr /st exkl moms

Additional information: Dairy; Manhole cylinder 510/410 mm; cylinder wall thickness: lowest segment: 4 mm; 3 subsequent segments: 3 mm; top 3 segments: 2.5 mm

Volumetric volume (L): 125.000 L

Pressure in tank: ATM - atmosferic

Material wet parts: SS AISI 304 (V2A)

Model: vertical

Configuration: insulated

Heat exchanger: no

Insulation: yes

Mobile tank: no

Total discharge: yes

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Outlet of tank: 125

Agitator: yes

Power: 2 / 3.5

Bottom: 6 mm

Internal diameter tank: 3.850 mm

Outer diameter tank: 3.965 mm

Cylinder height: 10.570 mm

Total height of tank: 13.350 mm

SKU: 486098

Mer information

Beskrivning av produkt

Material: Rostfritt 304

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: ATM – atmosferic

Konfiguration: insulated

Mobil tank: Nej

Övrig information: Dairy; Manhole cylinder 510/410 mm; cylinder wall thickness: lowest segment: 4 mm; 3 subsequent segments: 3 mm; top 3 segments: 2.5 mm; we can't give any guarantees about the agitator

Omrörare: Ja

Total urtappning: Ja

Uppvärmning/kylning: Nej

Vätskeberörd yta: SS AISI 304 (V2A)

Volym i liter: 125000



Utrustning

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Ja
Teknisk ritning finns: Nej

Översikt material

Material: Rostfritt 304

Dimensioner av tank

Cylinderhöjd: 10.570 mm
Invändig diameter: 3.850 mm
Total höjd: 13.350 mm
Ytterdiameter: 3.965 mm

Omrörare

Kraft (kW): 2 / 3.5

Tjocklek på tank

Botten: 6 mm

Mer

Isolerad: Ja