


## 125000 liter tank i Rostfritt 304

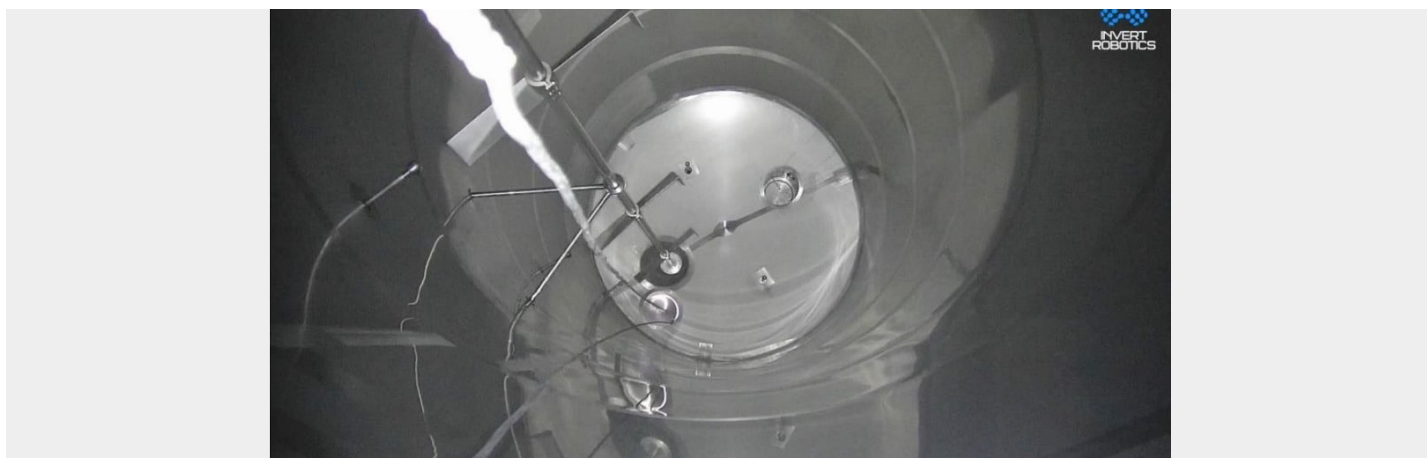

### 593 000 SEK /st exkl moms

**Additional information:** Dairy; Manhole cylinder 510/410 mm; wall thickness of cylinder: bottom segment: 4 mm; 3 subsequent segments: 3 mm; top 3 segments: 2.5 mm

**Volumetric volume (L):** 125.000 L

**Pressure in tank:** ATM - atmosferic

**Material wet parts:** SS AISI 304 (V2A)

**Model:** vertical

**Configuration:** insulated

**Heat exchanger:** no

**Insulation:** yes

**Mobile tank:** no

**Total discharge:** yes

**Documents included:** no

**Technical drawing included:** no

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Outlet of tank:** 125

**Agitator:** yes

**Power:** 2 / 3.5

**Bottom:** 6 mm

**Internal diameter tank:** 3.850 mm

**Outer diameter tank:** 3.965 mm

**Cylinder height:** 10.570 mm

**Total height of tank:** 13.350 mm

**SKU:** 486098

## Mer information

### Beskrivning av produkt

Material: Rostfritt 304

Modell: Vertikal

Nytilverkad/Begagnad: Begagnad

Arbetstryck i tank: ATM – atmosferic

Konfiguration: insulated

Mobil tank: Nej

Övrig information: Dairy; Manhole cylinder 510/410 mm; cylinder wall thickness: lowest segment: 4 mm; 3 subsequent segments: 3 mm; top 3 segments: 2.5 mm; we can't give any guarantees about the agitator

Omrörare: Ja

Total urtappning: Ja

Uppvärmning/kylning: Nej

Vätskeberörd yta: SS AISI 304 (V2A)

Volym i liter: 125000



## Utrustning

Dokument finns: Nej  
Fläns för omrörare: Nej  
Märkskylt: Ja  
Teknisk ritning finns: Nej

## Översikt material

Material: Rostfritt 304

## Dimensioner av tank

Cylinderhöjd: 10.570 mm  
Invändig diameter: 3.850 mm  
Total höjd: 13.350 mm  
Ytterdiameter: 3.965 mm

## Omrörare

Kraft (kW): 2 / 3.5

## Tjocklek på tank

Botten: 6 mm

## Mer

Isolerad: Ja