

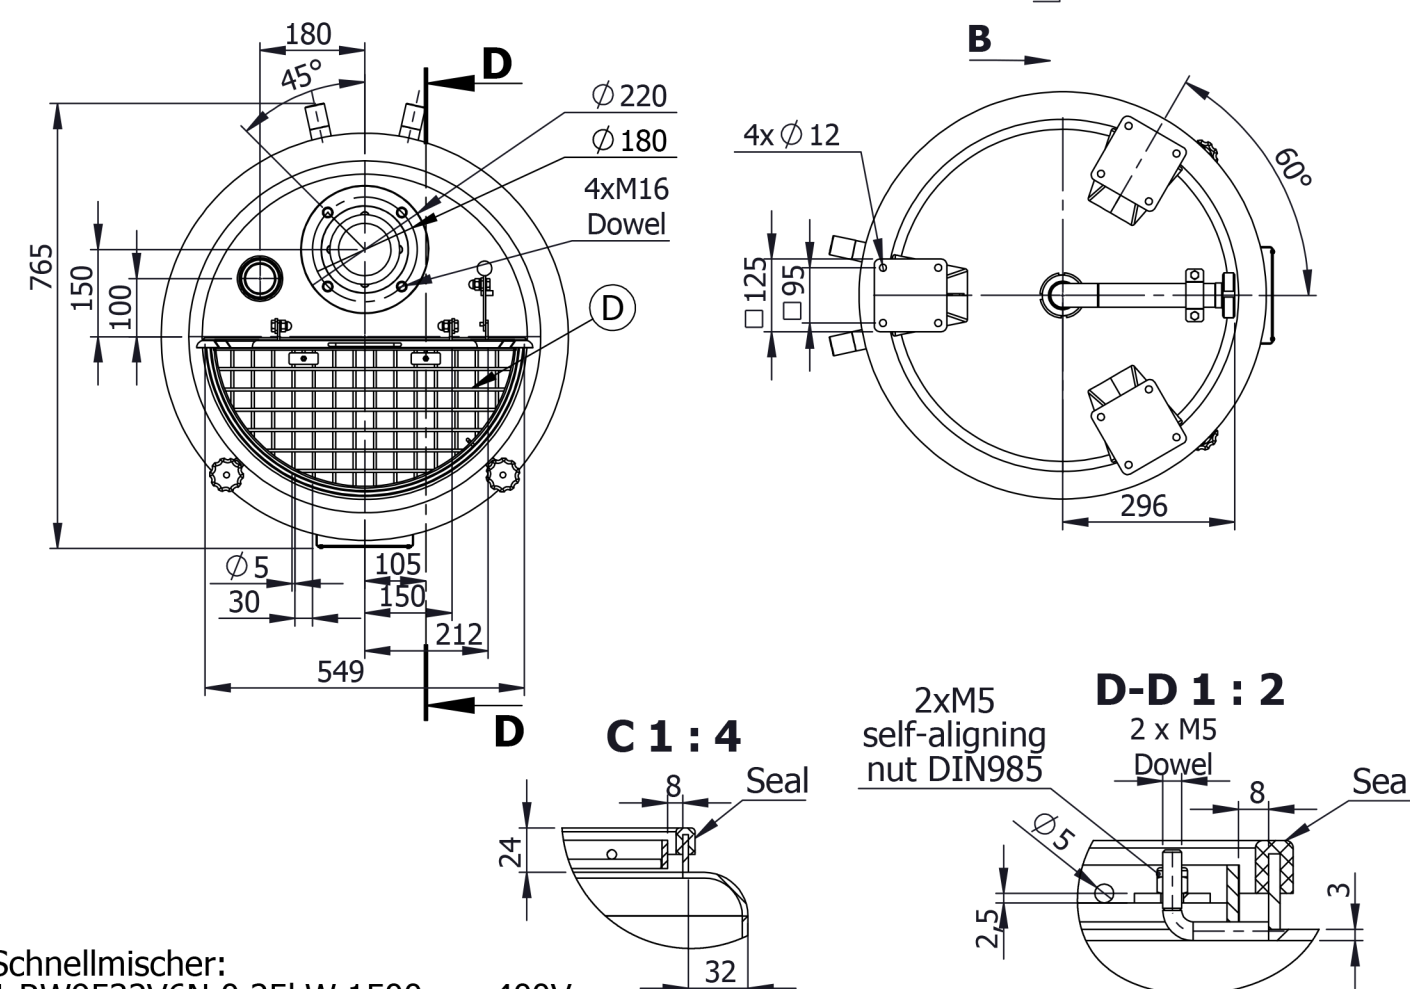


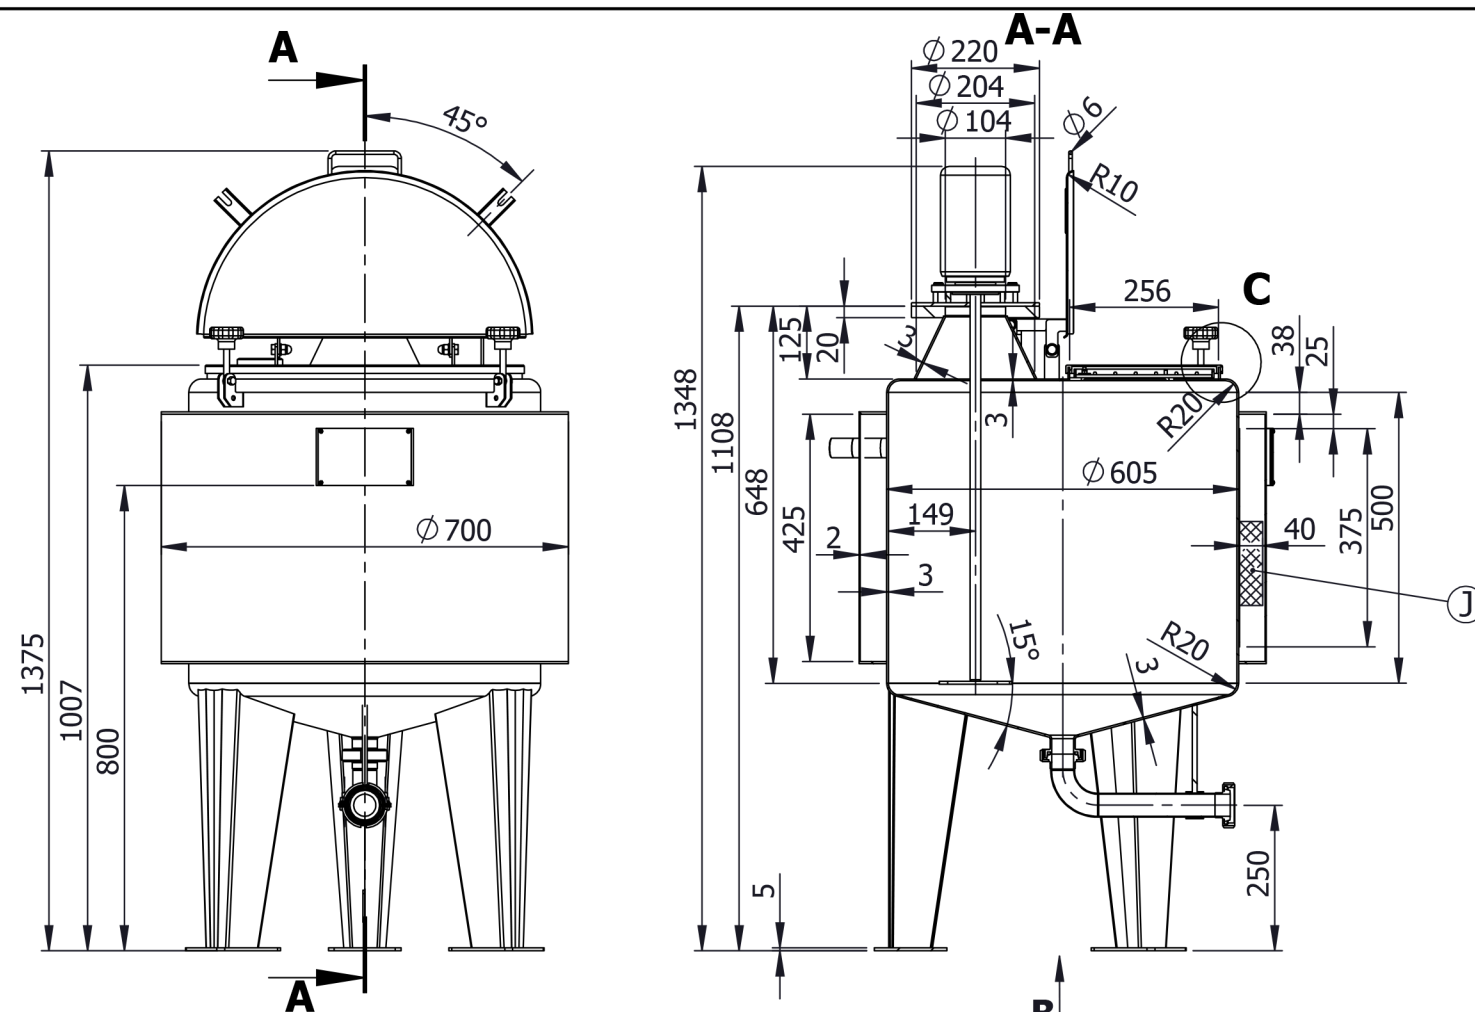


Schnellmischer:
1.RW9532V6N 0,25kW 1500rpm 400V
2.RW9533V6N 0,12kW 680rpm 400V

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

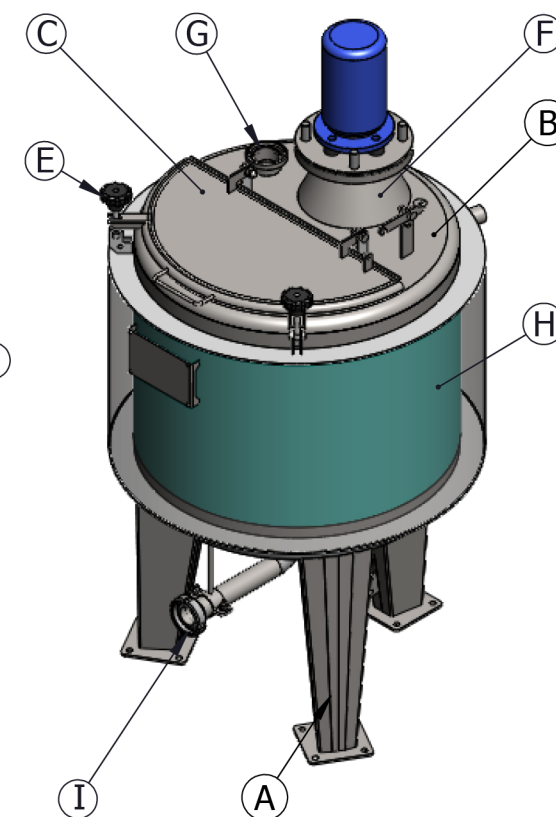

TYPE VC-HILA			
Geometrical volume	150 l	Geometrical volume - jacket	1.2 l
Working pressure	Atmospheric	Working pressure - jacket	3 bar
Working temperature	-10/100°C	Working temperature - jacket	-10/100°C
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	86 kg	Material	1.4404 / AISI 316L
Equipment output/voltage	-	Year of manufacture	2018

Item	Description	PN	DN	Qty.
		bar	mm.	
A	LEG ON ANCHOR PLATE *anchor bolts are not included	-	-	3
B	1/2 FIXED LID s=3mm	-	-	1
C	1/2 HINGED LID s=2mm	-	-	1
D	SAFETY GRID FOR 1/2 HINGED LID	-	-	1
E	TIGHTNER FOR HINGED LID	-	-	2
F	CONICAL INLET FOR AGITATOR UP TO FLANGE DN100 Ø220 s20 *agitator and mounting of the agitator are not included	atm.	100	1
G	INLET DN50 UP TO WELDING MALE DN50 DIN11851	atm.	50	1
H	LASER WELDED DIMPLE JACKET ON TANK SHELL H=375mm F=0.7m2 / Pmax=3bar / Tmax=100°C, INLET/OUTLET JACKET UP TO WELDING MALE NIPPLE G1"	3	G1"	1
I	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DN40 DIN11851	atm.	40	1
J	INSULATION MINERAL WOOL 40mm WITH DECORATIVE CASING FOR DIMPLE JACKET ON TANK SHELL D=699mm H=425mm 2.0mm	-	-	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B								
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12	
Surface	Outside			Matt 2B				Weld. seams	Outside			Strip grinded 2x20 Ra<1,6				
	Inside			Matt 2B					Inside			Flat grinded to Ra<0,8				
1.6/ 				Drawn: K.N.			Scale 1:13	Weight	1.4404/ AISI316L							
				Checked: K.I.			150L									
				Approved: D.M.								Rev	30.5.2018 г.		Lang Eng	Sheet 1/1