
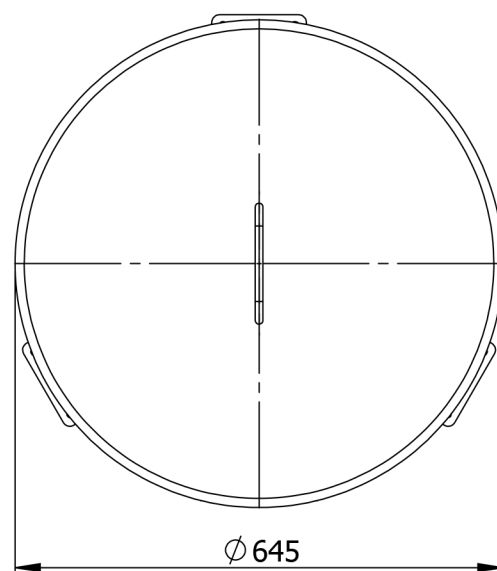
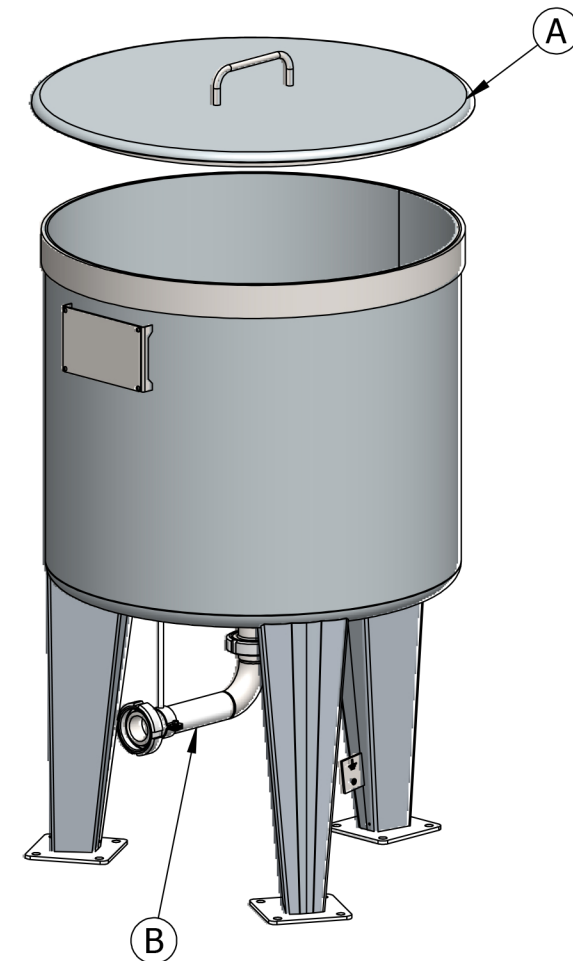
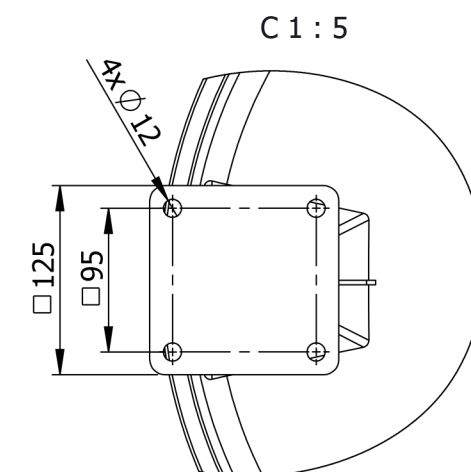
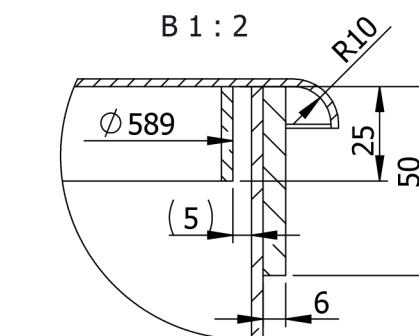
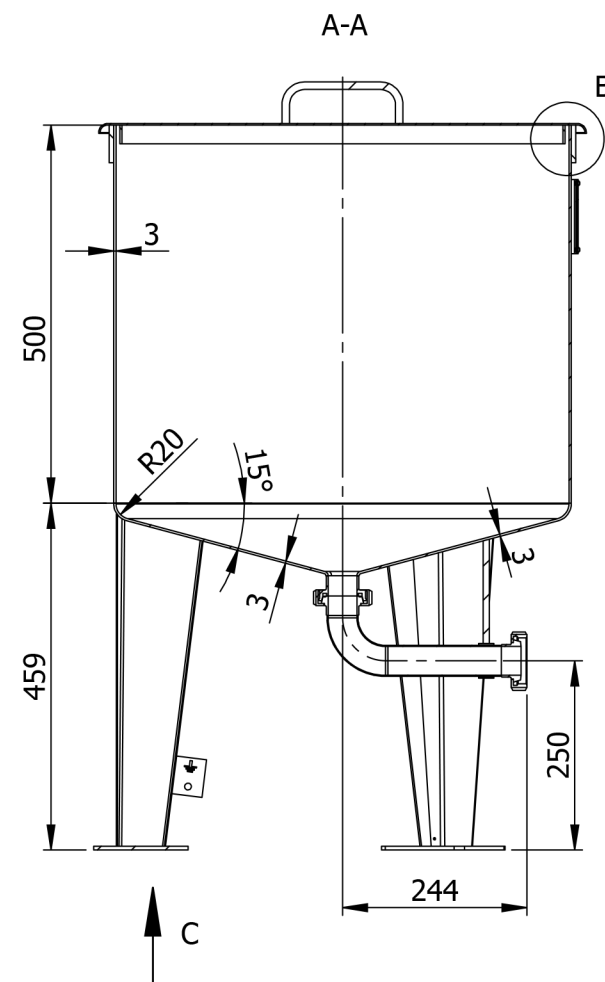


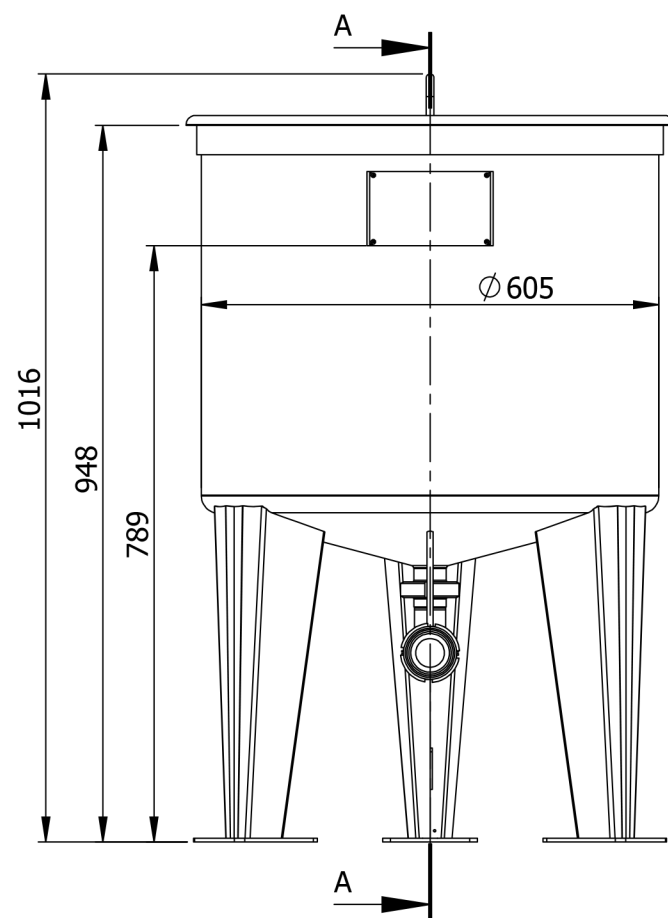

TYPE VC-SLO			
Geometrical volume	150 ℓ	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	53 kg	Material	1.4404 / AISI 316L
Equipment output/voltage	-	Year of manufacture	2018

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

Item	Description												PN	DN	Qty.
													bar	mm.	
A	DUST PROTECTIVE LID 2mm												atm.	-	1
B	DISMOUNTABLE TOTAL OUTLET DN40 UP TO WELDING LINER DN40 AND NUT DIN 11851												atm.	40	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside			Matt 2B			Weld. seams	Outside			Strip grinded 2x20 Ra<1,6		
	Inside			Matt 2B				Inside			Flat grinded to Ra<0,8		

--	--