


15000 liter tank i Syrafast 316

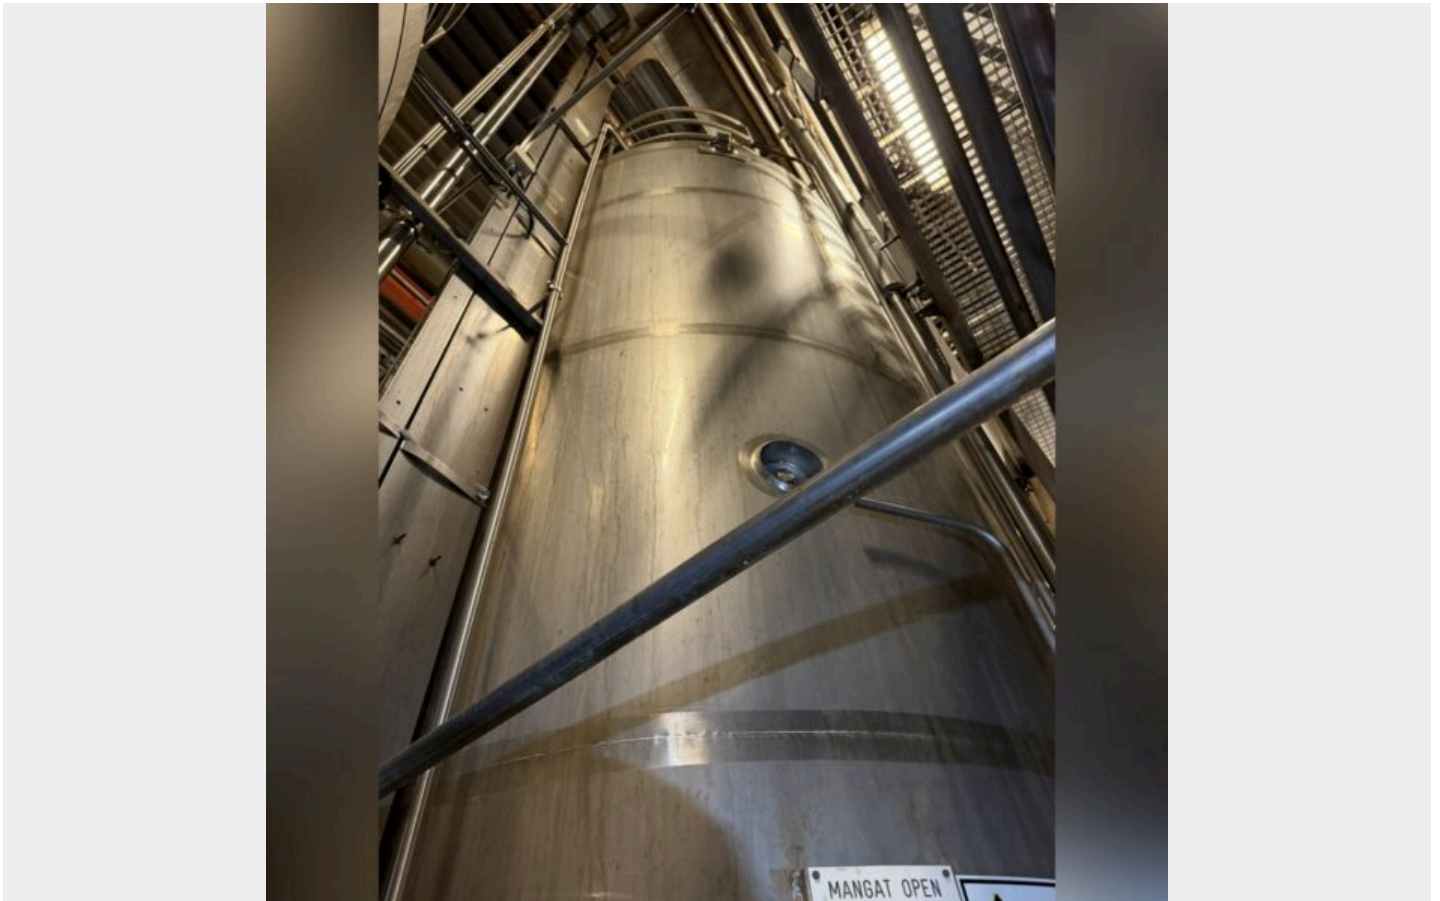

151 000 SEK /st exkl moms

Additional information: Manhole approx. 500 x 400 mm; minor dents in the inner cylinder; 1 welded ladder section on the outside (see photos); bump at the insulation jacket

Volumetric volume (L): 15.000 L

Pressure in tank: ATM - atmospheric

Max. temperature (°C): 65 °C



Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: insulated

Heat exchanger: no

Insulation: yes

Mobile tank: no

Total discharge: yes

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: cylinder

Outlet of tank: 72

Top: 3 mm

Cylinder: 3 mm

Bottom: 3 mm

Internal diameter tank: 2.100 mm

Outer diameter tank: 2.200 mm

Cylinder height: 4.500 mm

Total height of tank: 6.850 mm

SKU: 703295

Mer information



Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: ATM – atmosferic

Konfiguration: insulated

Max. arbetstemperatur: 65 °C

Mobil tank: Nej

Övrig information: Food; Manhole diameter: approx. 530 x 430 mm, dimensions as shown in the drawing; total height excluding the agitator and ventilation/exhaust system; slight dents in the insulation jacket (see

Övrig information2: photos)

Omrörare: Nej

Total urtappning: Ja

Uppvärmning/kylning: Nej

Vätskeberörd yta: SS AISI 316L (V4A)

Volym i liter: 15000

Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej

Översikt material

Material: Syrafast 316

Dimensioner av tank

Cylinderhöjd: 4.500 mm

Invändig diameter: 2.100 mm

Total höjd: 6.190 mm

Ytterdiameter: 2.200 mm



Tjocklek på tank

Botten: 3 mm

Cylinder: 3 mm

Topp: 3 mm

Mer

Isolerad: Ja