

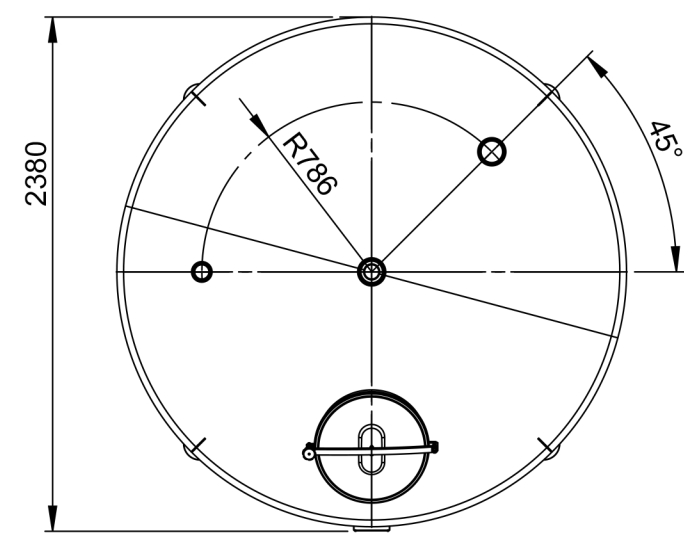


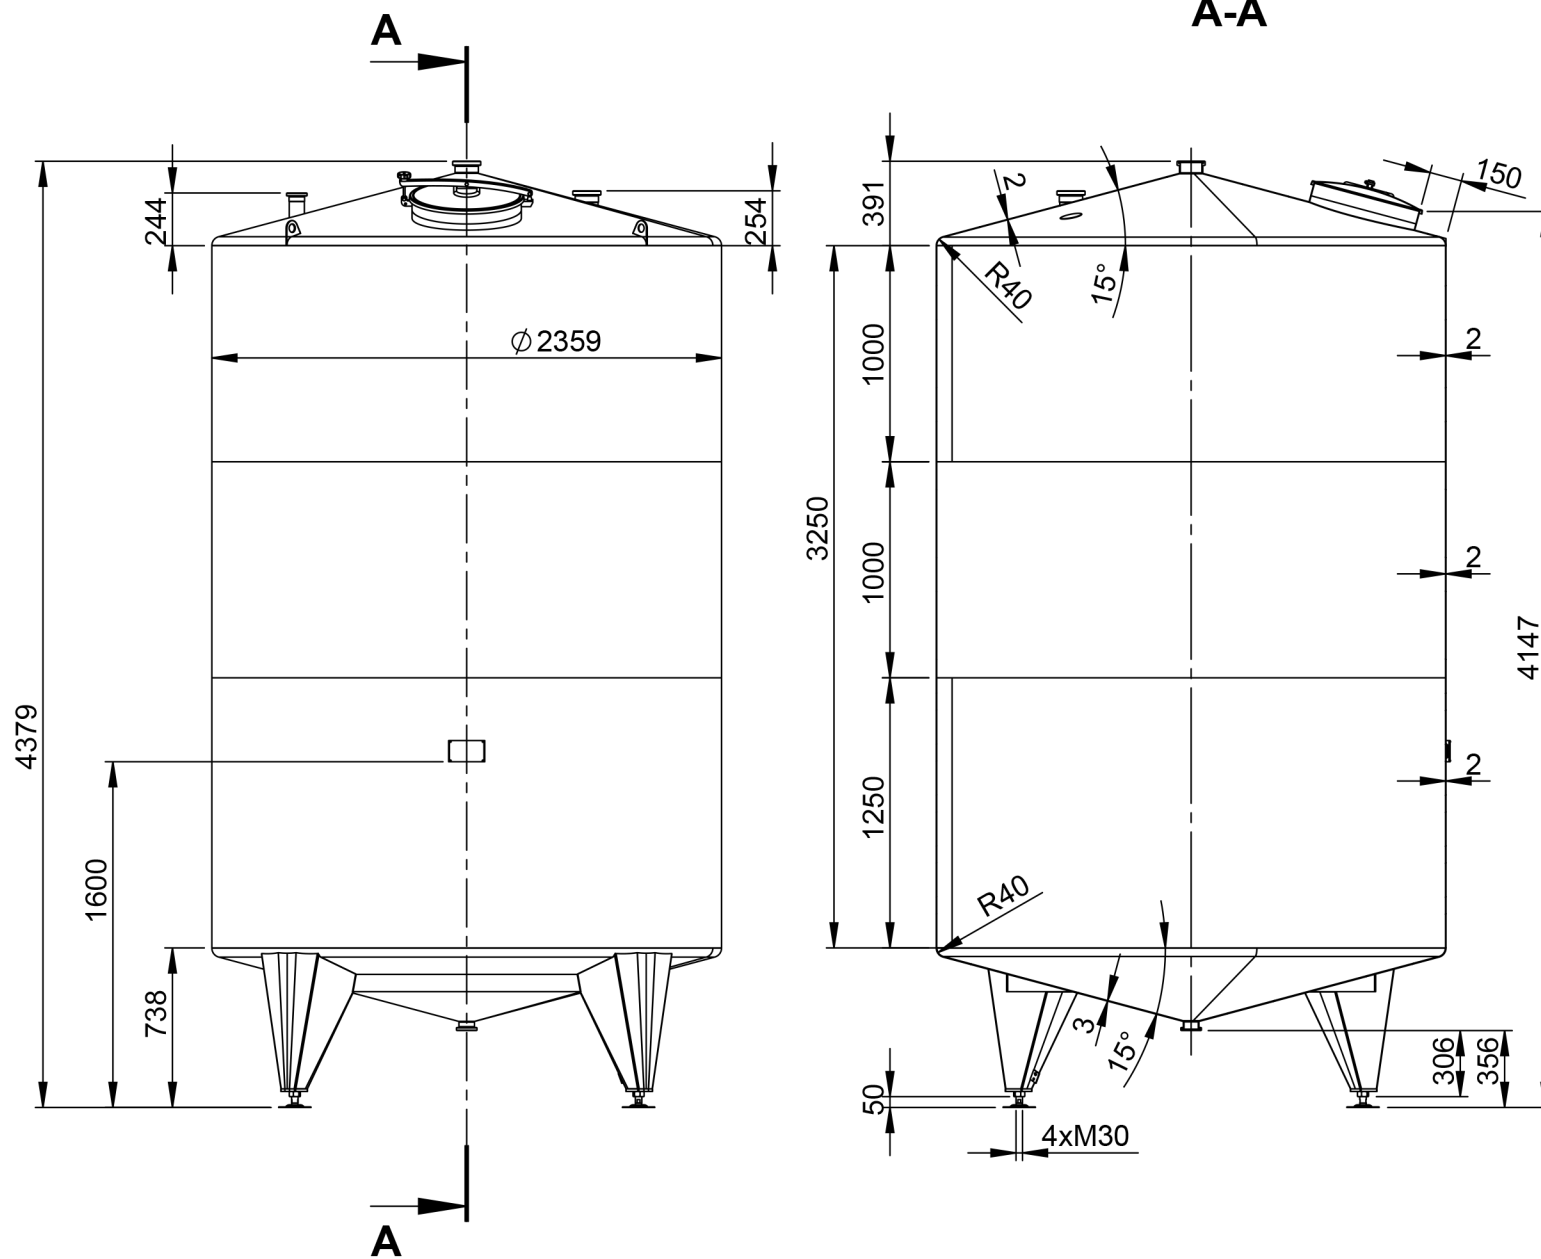

Geometrical volume		15300 l	Geometrical volume - jacket		-
Working pressure		Atmospheric	Working pressure - jacket		-
Working temperature		-10/80°C	Working temperature - jacket		-
Maximum density		1.2kg/dm³	Jacket pressure drop		-
Tare mass		647 kg	Material		1.4307/AISI 304L
Equipment output/voltage		-	Year of manufacture		

Revisions					
Rev.	Description	Zone	Date	Drawn	Checked
A	Remove the elliptical manhole. Change the name of the tank. Change stock numbers.		3.9.2018 r.		
B					

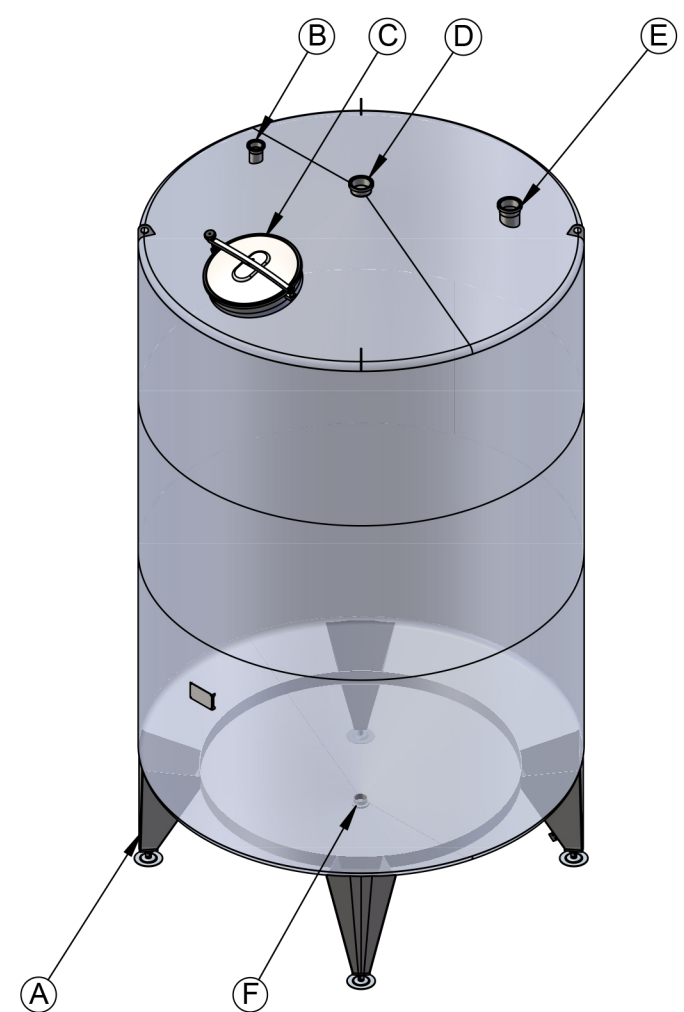

Item	Description	PN	DN	Qty.
		bar	mm.	
A	LEG ON ADJUSTABLE SUPPORT	-	-	4
B	INLET DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN11851	atm.	65	1
C	UPPER MANHOLE DN500 Elica art.50/1p-4 WITH EPDM-FDA GASKET	atm.	500	1
D	INLET DN100 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN100 DIN11851	atm.	100	1
E	INLET AIRVENT DN100 ON TANK TOP UP TO WELDING MALE DN100 DIN11851	atm.	100	1
F	TOTAL OUTLET DN65 UP TO WELDING MALE DN65 DIN11851	atm.	65	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside		Matt 2B		Weld. seams	Outside		Strip grinded 2x20 Ra<1,6	
	Inside		Matt 2B			Inside		Strip grinded 2x20 Ra<1,6	

		Drawn: S.S		Scale 1:35		Weight 647		1.4307/ AISI 304L			
		Checked: K.I		15300L							
		Approved: D.M						Rev			
										Lang Eng	
										Sheet 1/1	