


16150 liter tank i Syrafast 316

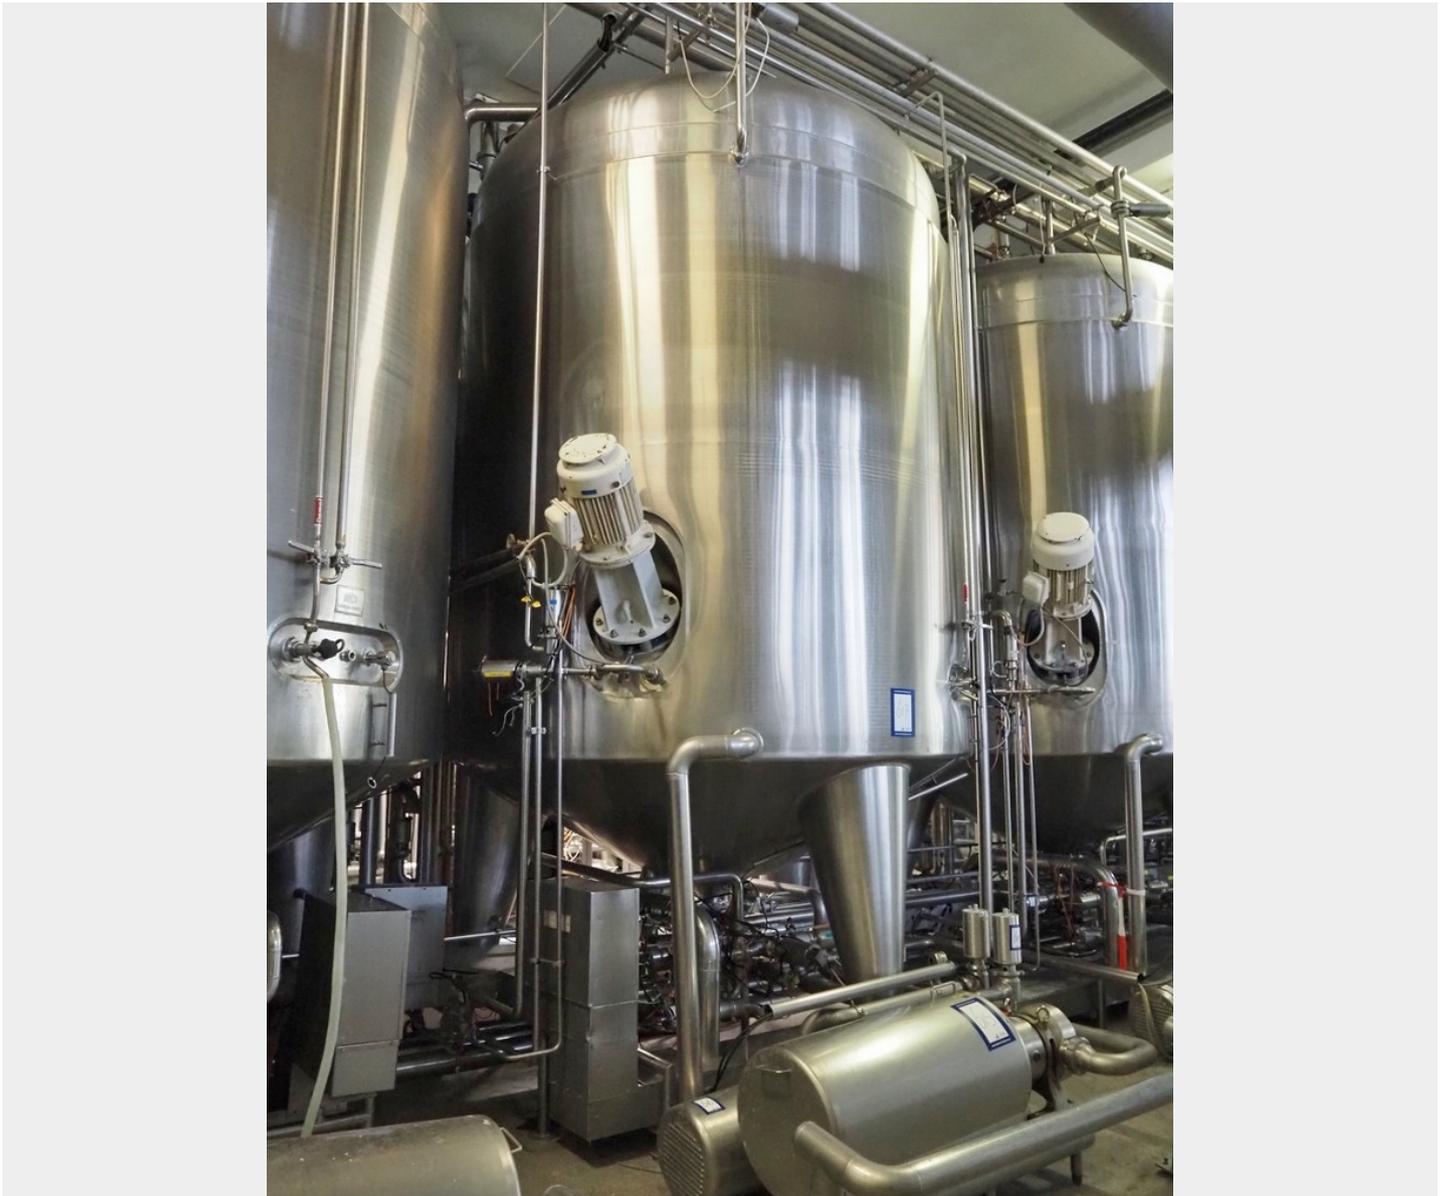

238,000,00 kr /st exkl moms

Additional information: Dairy; Double jacket with trickle ring - only suitable for unpressurized tempering; in some cases, the welding of the double jackets has become slightly loose in the upper area; on request - up to 5x more vessels available (external storage)

Volumetric volume (L): 16.150 L

Pressure in tank: pressure

Max. pressure (Bar): 3,20 Bar

Max. temperature (°C): 150 °C

Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: single jacketed with heat-exchanger

Heat exchanger: yes

Insulation: no

Mobile tank: no

Total discharge: yes

Volume: 1.000 L

Max Overpressure: 3,20 Bar

Max. working temperature: 150 °C

Type HE on the bottom: heating/cooling jacket

Type HE on the cylinder: heating/cooling jacket

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: headside

Outlet of tank: 80

Agitator: yes

Number of revolutions: 720 / 1460

Power: 1.7 / 6.8

Cylinder: 8 mm

Bottom: 6 mm

Internal diameter tank: 2.490 mm

Outer diameter tank: 2.580 mm

Cylinder height: 2.500 mm

Total height of tank: 5.000 mm

SKU: 435479

Mer information

Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: pressure

Konfiguration: single jacketed with heat-exchanger

Max. arbetstemperatur: 150 °C

Mobil tank: Nej

Övrig information: Dairy; Double jacket with trickle ring – only suitable for pressureless cooling; in 1 tank the welding of the double jacket in the upper area has come loose in places; we can't give any guarantees

Övrig information2: about the agitator

Omrörare: Nej

Övertryck: 3.20 Bar

Total urtappning: Ja

Trycktank: Ja

Uppvärmning/kylning: Ja

Vätskeberörd yta: SS AISI 316 (V4A)

Volym i liter: 16150

Utrustning

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Nej
Teknisk ritning finns: Nej

Översikt material

Material: Syrafast 316

Dimensioner av tank

Cylinderhöjd: 2.500 mm
Invändig diameter: 2.490 mm
Total höjd: 5.000 mm
Ytterdiameter: 2.580 mm

Omrörare

Kraft (kW): 1.7 / 6.8
Varvtal: 720 / 1460

Tjocklek på tank

Botten: 6 mm
Cylinder: 8 mm

Mer

Isolerad: Nej