


17200 liter tank i Syrafast 316

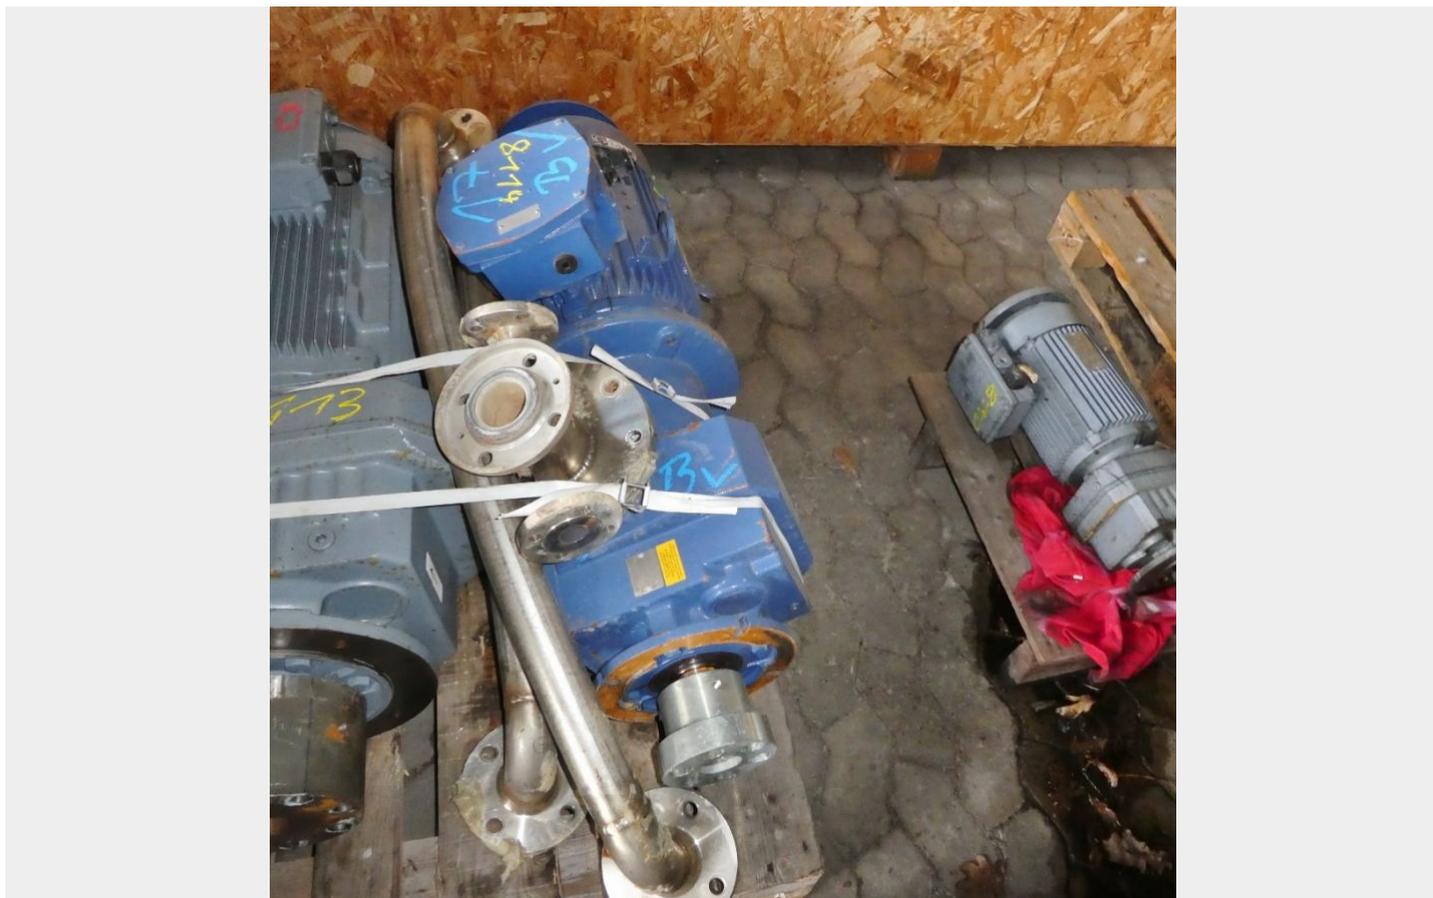

273,000,00 kr /st exkl moms

Additional information: Chemistry; 4 support brackets, Aisi 316; Pitting corrosion on the inside of the tank;
Metallic discolouration inside

Volumetric volume (L): 17.200 L

Pressure in tank: pressure and vacuum

Max. pressure (Bar): 6 Bar

Min. pressure (Bar): 1 Bar

Max. temperature (°C): 200 °C

Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: single jacketed with heat-exchanger

Heat exchanger: yes

Insulation: no

Mobile tank: no

Total discharge: yes

Volume: 43 L

Max Overpressure: 6 Bar

Max onderdruk: 1 Bar

Max. working temperature: 200 °C

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: in the bottom

Outlet of tank: flange DN150

Agitator: yes

Power: 11

Top: 14,10 mm

Cylinder: 10 mm

Bottom: 10,10 mm

Internal diameter tank: 2.400 mm

Cylinder height: 3.250 mm

Total height of tank: 6.250 mm

SKU: 286553

Mer information
