
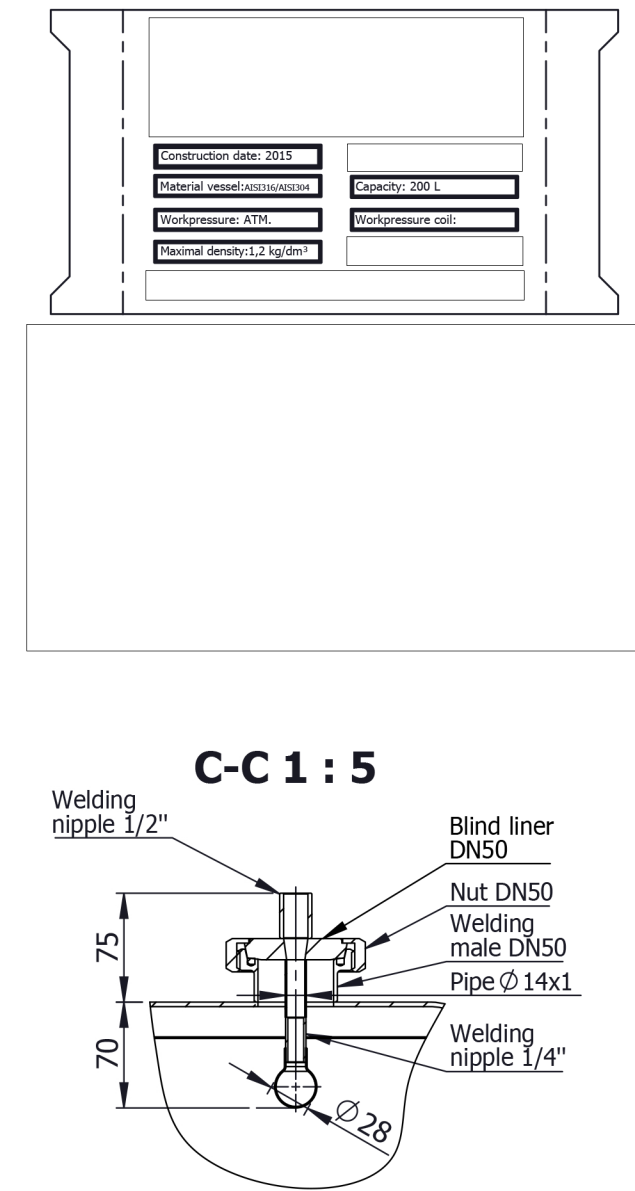
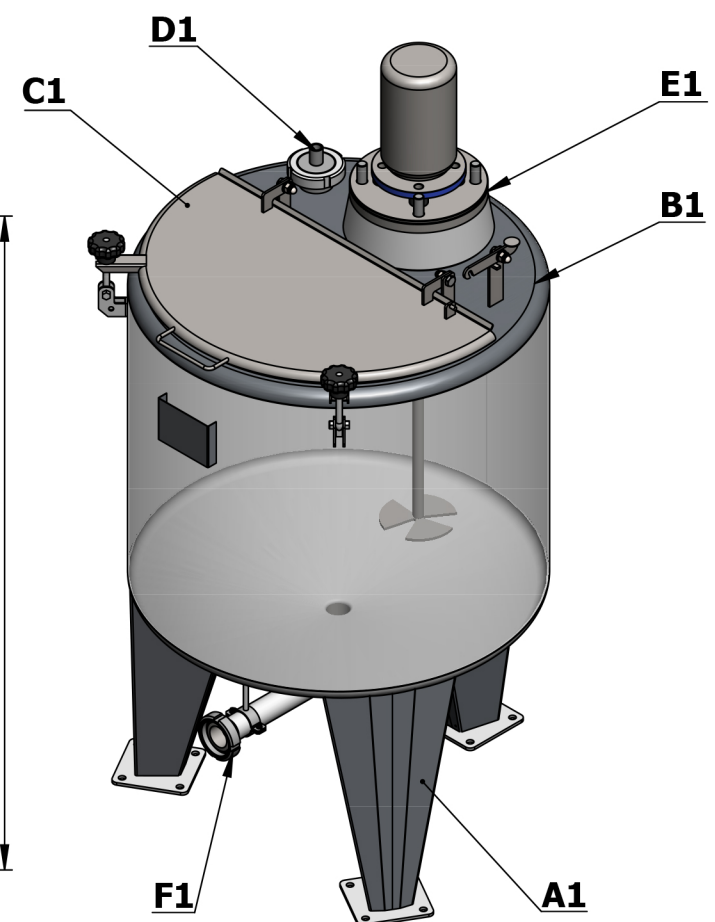


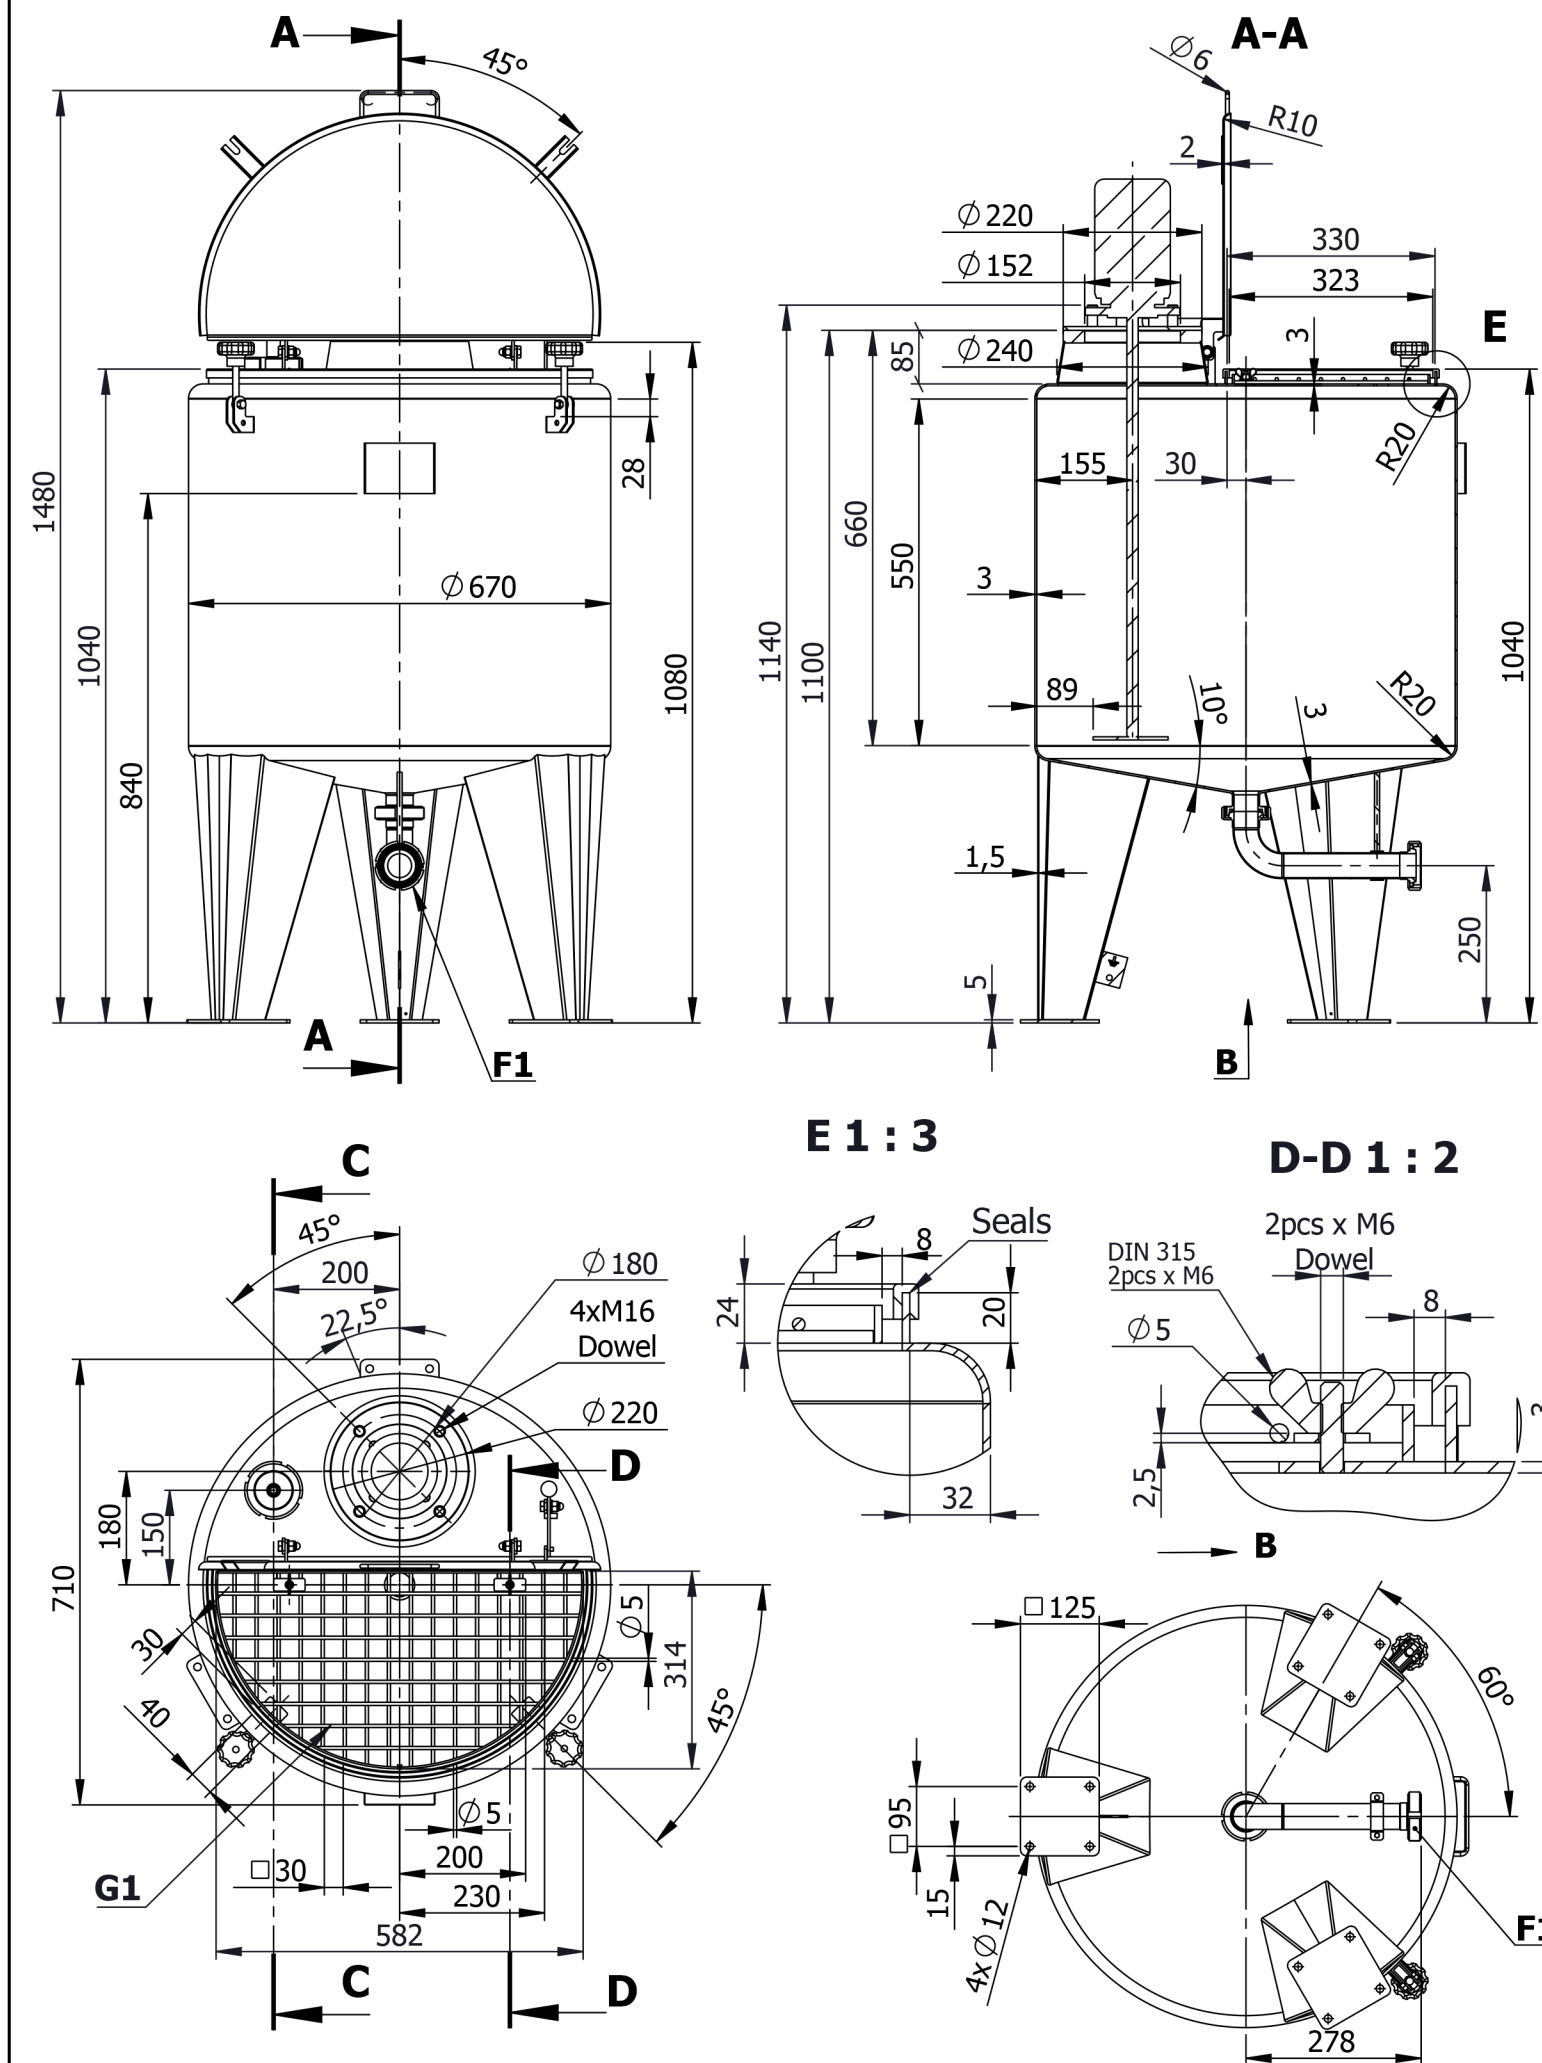

Schnellmischer:
 1.RW9248V6N 0,37kW 1500rpm 400V
 2.RW9250V6N 0,12kW 680rpm 400V

Item	Description	PN	DN	Qty.
		MPa	mm.	
A1	LEG ON ANCHOR PLATE (anchor bolts are not included) - AISI 304	-	-	3
B1	1/2 FIXED LID - AISI 316	-	-	1
C1	1/2 HINGED LID - AISI 316	-	-	1
D1	DISMOUNTABLE STATIC CIP SPRAY BALL Ø28 360° UP TO WELDING MALE NIPPLE 1/2" - AISI 316	atm.	1/2"	1
E1	INLET FOR AGITATOR UP TO FLANGE Ø 220 s20 - AISI 316	-	100	1
F1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT - AISI 316	atm.	40	1
G1	SAFETY GRID ON HINGED LID - AISI 316	-	-	1

Surface	Outside	2B	Welding seam	Outside	strip grinded to Ra<1,6
	Inside	2B		Inside	

1.6	min.0,5x45°	Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006			
Drawn.: K.N	Scale 1:12	Mass 90.4	AISI 316 AISI 304		
Checket: K.I					0,2m3
Eng.App.: D.M					30.3.2015 г.
				Sheet	1/1