
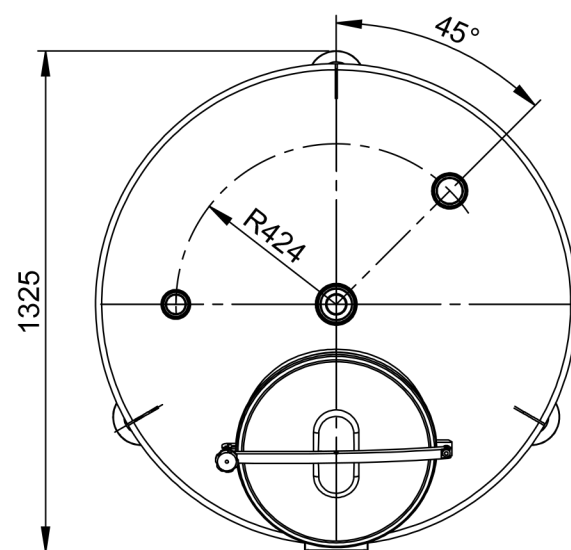
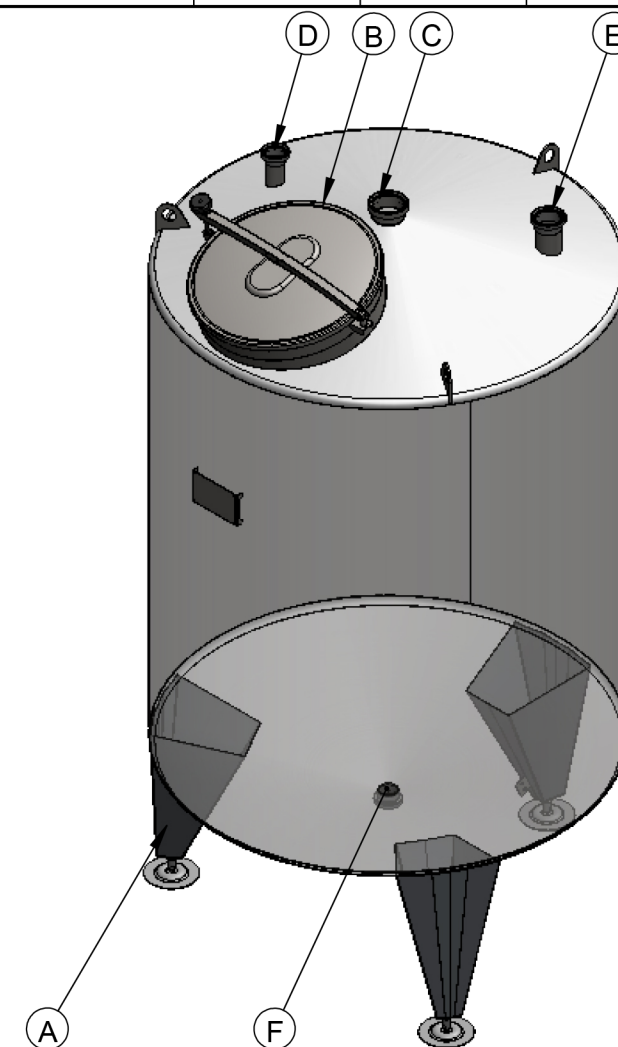
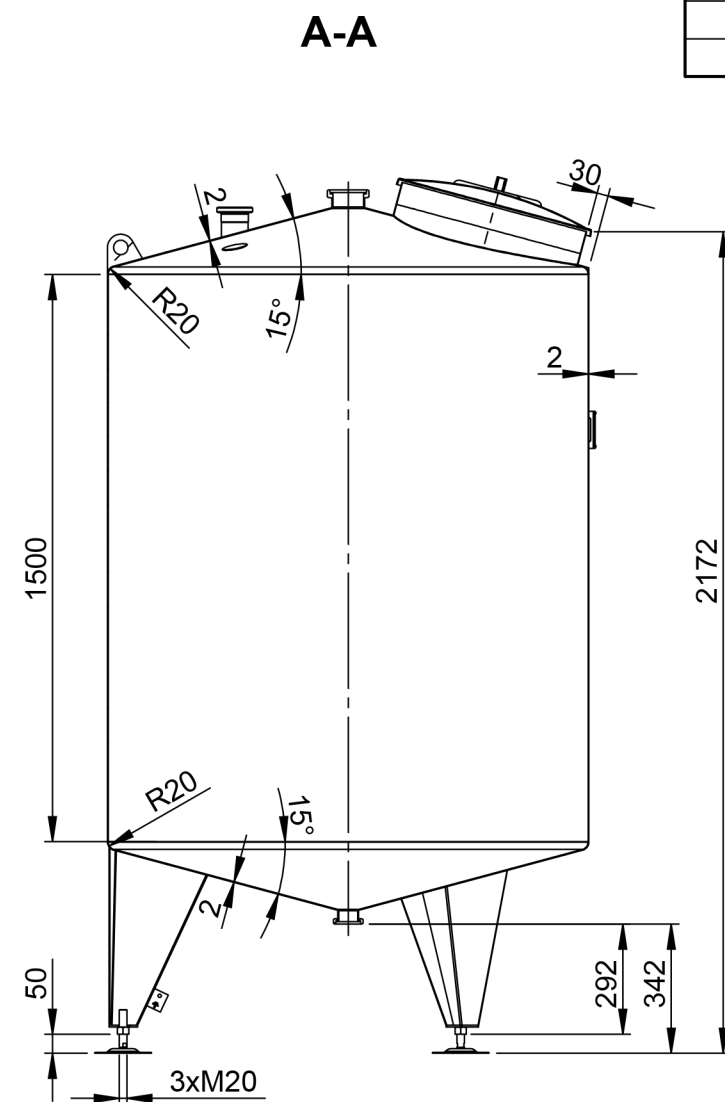


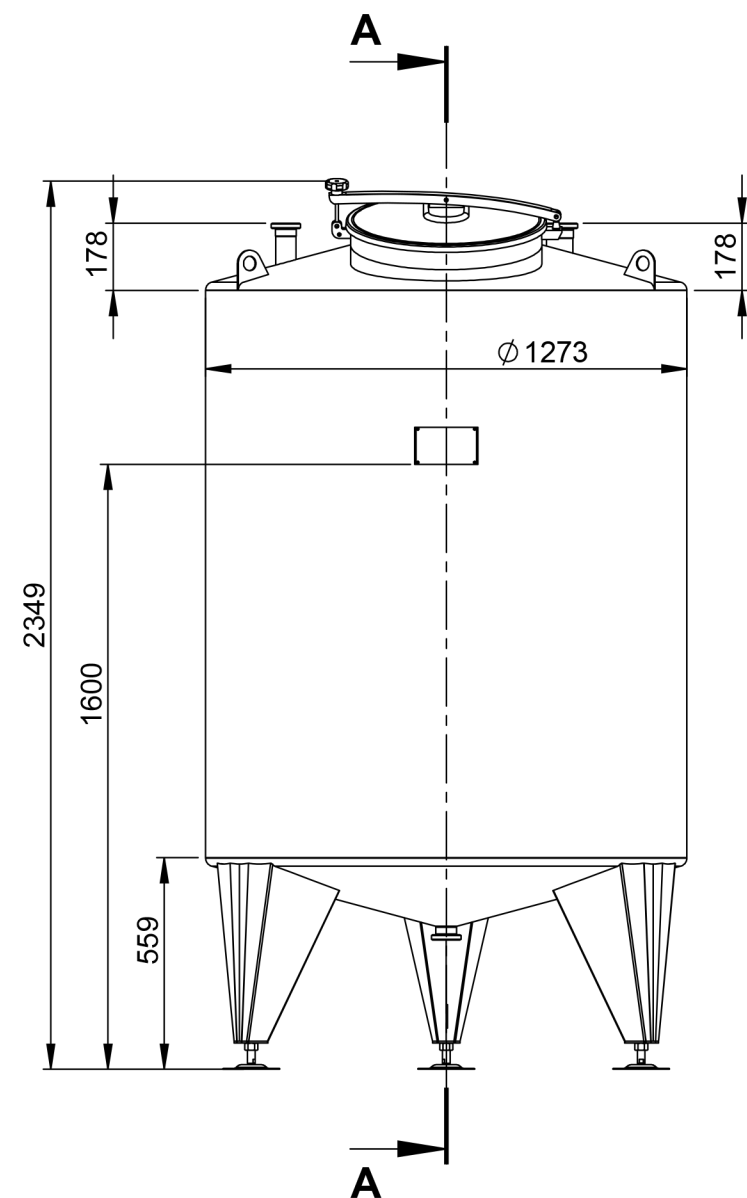

Geometrical volume	2000 l	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	171 kg	Material	AISI 304L
Equipment output/voltage	-	Year of manufacture	2017

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

Item	Description	PN bar	DN mm.	Qty.
A	LEG ON ADJUSTABLE SUPPORT	-	-	3
B	UPPER MANHOLE DN500 Elica art.50/1p-4	atm.	500	1
C	INLET DN80 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN80 DIN11851	atm.	80	1
D	INLET DN50 ON TANK TOP UP TO WELDING MALE DN50 DIN11851	atm.	50	1
E	INLET AIR VENT DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN11851	atm.	65	1
F	TOTAL OUTLET DN50 UP TO WELDING MALE DN50 DIN11851	atm.	50	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside	Matt 2B	Weld. seams	Outside	Strip grinded 2x20 Ra<1,6
	Inside	Matt 2B		Inside	Flat grinded to Ra<0,8

1.6	✓	✓	✓	Drawn: K.N.	Scale 1:20	Weight 171	AISI 304L	
✓	✓	✓	✓	Checked: K.I.				2000L
✓	✓	✓	✓	Approved: D.M.			Rev	1.6.2017
							Lang Eng	Sheet 1/1