



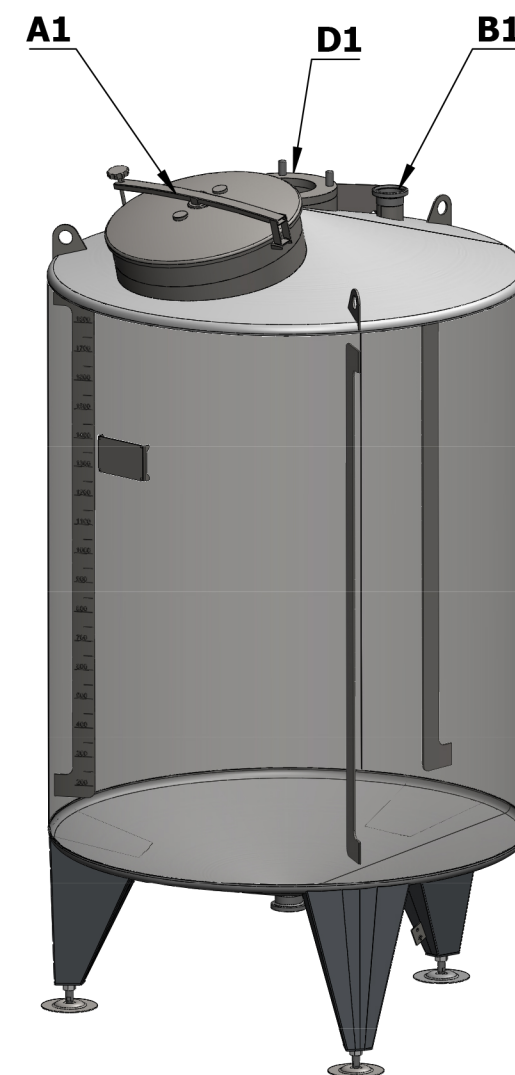

Geometrical volume	2000 t	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	200 kg	Material	ASTI 304L / ASTI 316L
Equipment output/voltage	-	Year of manufacture	2016

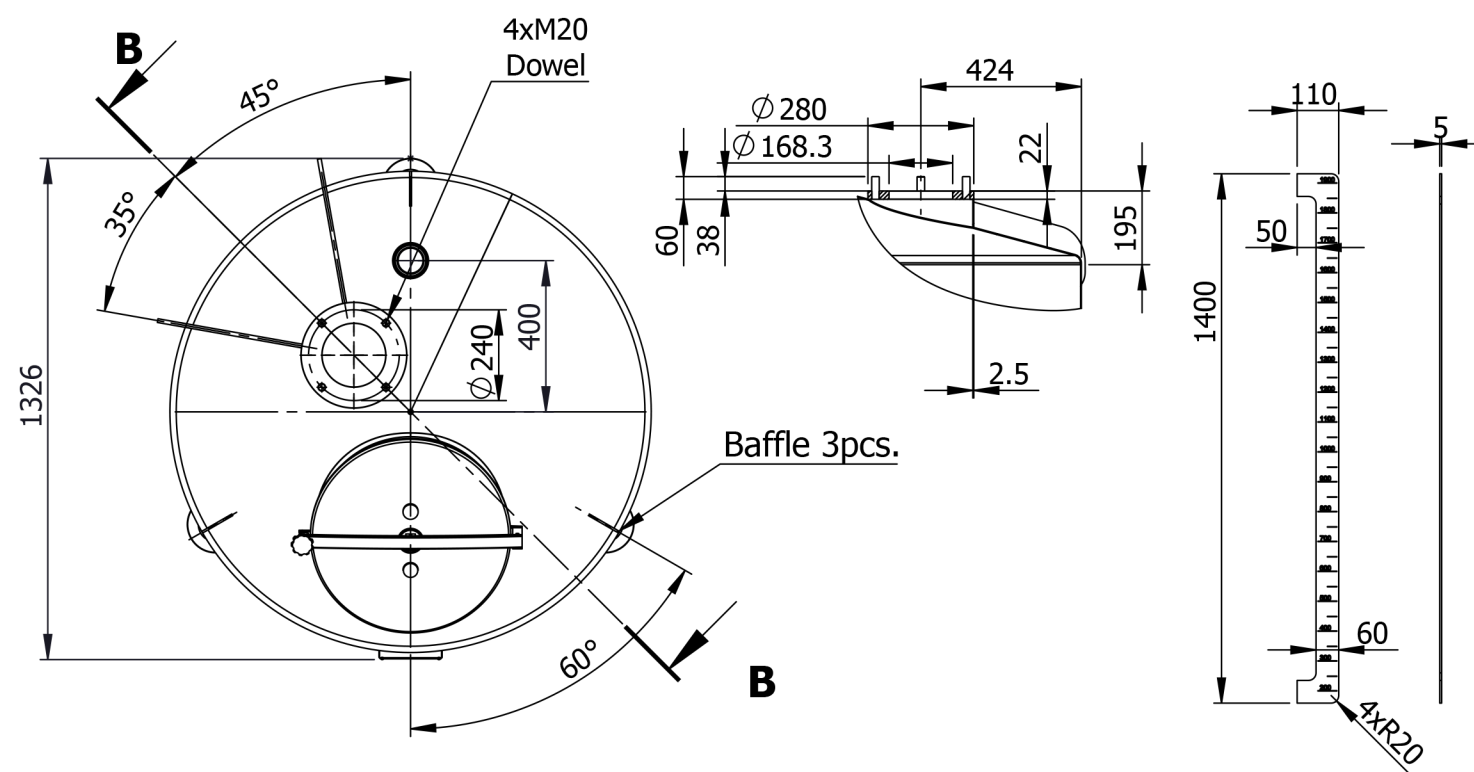

Item	Description	PN	DN	Qty.
		bar	mm.	
A1	UPPER MANWAY - AISI 316L - AISI 316L	atm.	500	1
B1	INLET UP TO WELDING MALE DIN11851 - AISI 316L	atm.	65	1
C1	OUTLET UP TO WELDING MALE DIN11851 - AISI 316L	atm.	65	1
D1	INLET UP TO FLANGE Ø 280 s22-AISI 316L	atm.	-	1

Surface	Outside	Matt 2B	Welding seam	Outside	Strip grinded to Ra<1,6
	Inside	Matt 2B		Inside	Strip grinded to Ra<1,6

1.6

 min.0,5x45°

Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006

	Drawn: K.N.	Scale 1:20	Weight 200		
	Checket: K.I.				
	Approved by: D.M.		Rev.	11-Apr-16	lang eng