


2000 liter tank i Rostfritt 304

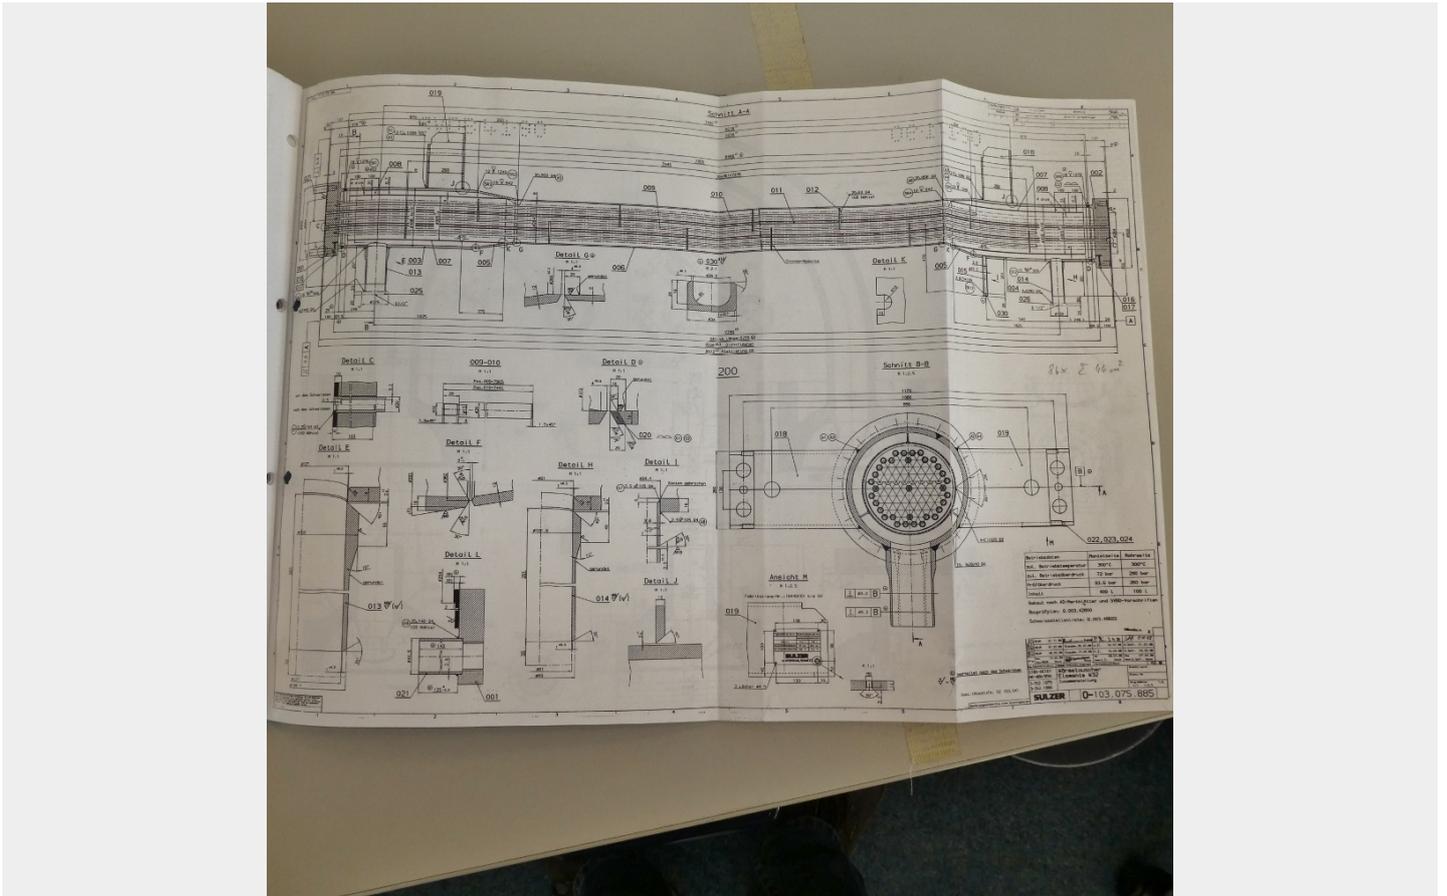

109,000,00 kr /st exkl moms

Additional information: cylinder made of heat-resistant steel: permissible working pressure: 72 bar; permissible working temperature: 300° C; capacity: 400 liter; tubes made of titan II: permissible working pressure: 200 bar; permissible working temperature: 300°C; capacity: 100 liter; chemistry; some residues of previous content

Volumetric volume (L): 2.000 L
Pressure in tank: ATM - atmosferic
Material wet parts: SS AISI 304 (V2A)
Model: vertical

Configuration: insulated
Heat exchanger: no
Insulation: yes
Mobile tank: no
Total discharge: yes

Documents included: no
Technical drawing included: no
Registration plate on the tank: no
Flange for agitator: no
Outlet of tank: 25

Agitator: yes
Number of revolutions: 290
Power: 55
Internal diameter tank: 1.400 mm
Outer diameter tank: 1.050 mm

Cylinder height: 1.400 mm
Total height of tank: 2.300 mm
Total outer length: 8.512 mm

SKU: 271342

Mer information

Beskrivning av produkt

Material: Rostfritt 304

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetstryck i tank: ATM – atmosferic

Konfiguration: insulated

Mobil tank: Nej

Övrig information: cylinder made of heat-resistant steel; permissible working pressure: 72 bar;

permissible working temperature: 300° C; capacity: 400 liter; tubes made of titan II: permissible working pressure: 200

Övrig information2: bar; permissible working temperature: 300°C; capacity: 100 liter; chemistry; some residues of previous content; we can't give any guarantees about the agitator

Omrörare: Ja

Total urtappning: Ja

Uppvärmning/kylning: Nej

Vätskeberörd yta: SS AISI 304 (V2A)

Volym i liter: 2000

Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Nej

Teknisk ritning finns: Nej

Översikt material

Material: Rostfritt 304

Dimensioner av tank

Cylinderhöjd: 1.400 mm

Invändig diameter: 1.400 mm

Total höjd: 2.300 mm

Ytterdiameter: 1.050 mm



Omrörare

Kraft (kW): 55

Varvtal: 290

Mer

Isolerad: Ja