
25000 liter tank i Syrafast 316

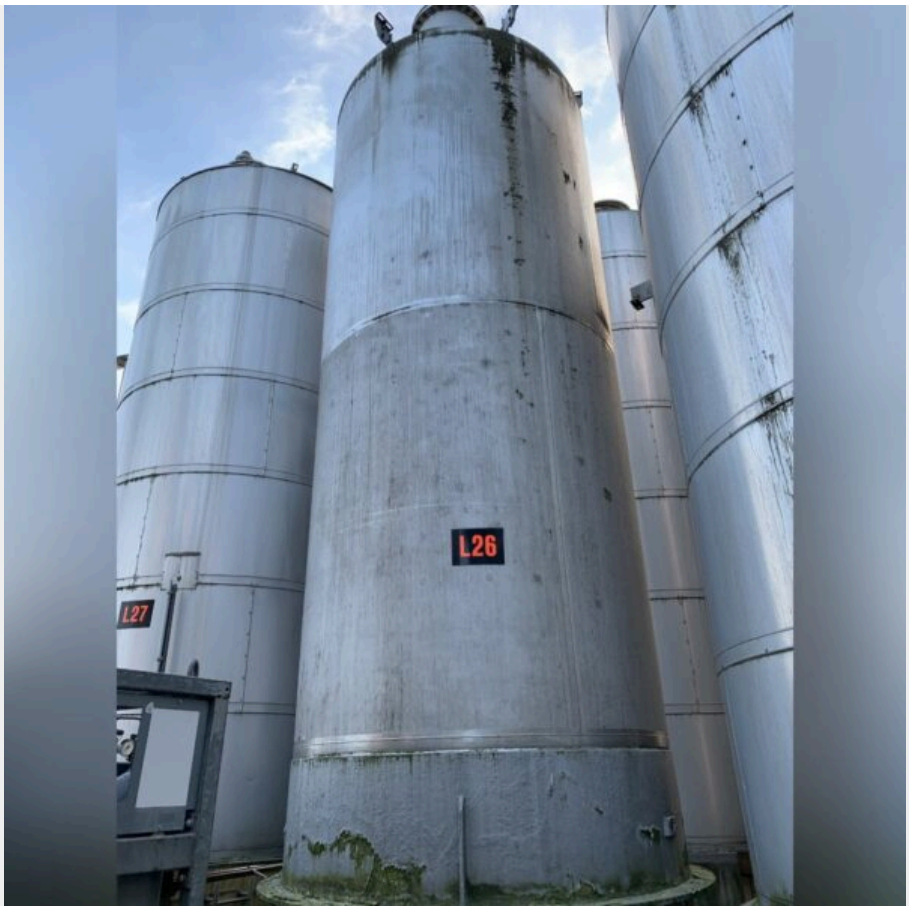

201 000 SEK /st exkl moms

Additional information: Pharmaceutical Chemistry; Floor frame made of stainless steel 304; wall thickness of lower cylinder half approx. 6 mm; manhole cover plated
Volumetric volume (L): 25.000 L
Pressure in tank: ATM - atmosferic
Max. temperature (°C): 50 °C

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Material wet parts: SS AISI 316 (V4A)

Model: vertical
Configuration: single-skin
Heat exchanger: no
Insulation: no
Mobile tank: no

Total discharge: yes
Documents included: no
Technical drawing included: no
Registration plate on the tank: yes
Flange for agitator: no

Position of manway: headside
Outlet of tank: available
Top: 5,80 mm
Cylinder: 5 mm
Bottom: 6,30 mm

Internal diameter tank: 2.400 mm
Outer diameter tank: 2.400 mm
Cylinder height: 5.400 mm
Total height of tank: 7.200 mm

SKU: 477547

Mer information

Beskrivning av produkt

Material: Syrafast 316
Modell: Vertikal
Nytillverkad/Begagnad: Begagnad
Arbetstryck i tank: ATM – atmosferic
Konfiguration: single-skin
Max. arbetstemperatur: 50 °C
Mobil tank: Nej
Övrig information: Pharmaceutical Chemistry; Floor frame made of stainless steel 304; wall thickness of lower cylinder half approx. 6 mm; manhole cover plated
Omrörare: Nej
Total urtappning: Ja
Uppvärmning/kylning: Nej
Vätskeberörd yta: SS AISI 316 (V4A)
Volym i liter: 25000

Utrustning

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Ja
Teknisk ritning finns: Nej

Översikt material

Material: Syrafast 316

Dimensioner av tank

Cylinderhöjd: 5.400 mm
Invändig diameter: 2.400 mm
Total höjd: 7.200 mm
Ytterdiameter: 2.400 mm

Tjocklek på tank
Botten: 6,30 mm
Cylinder: 5 mm
Topp: 5,80 mm

Mer
Isolerad: Nej