

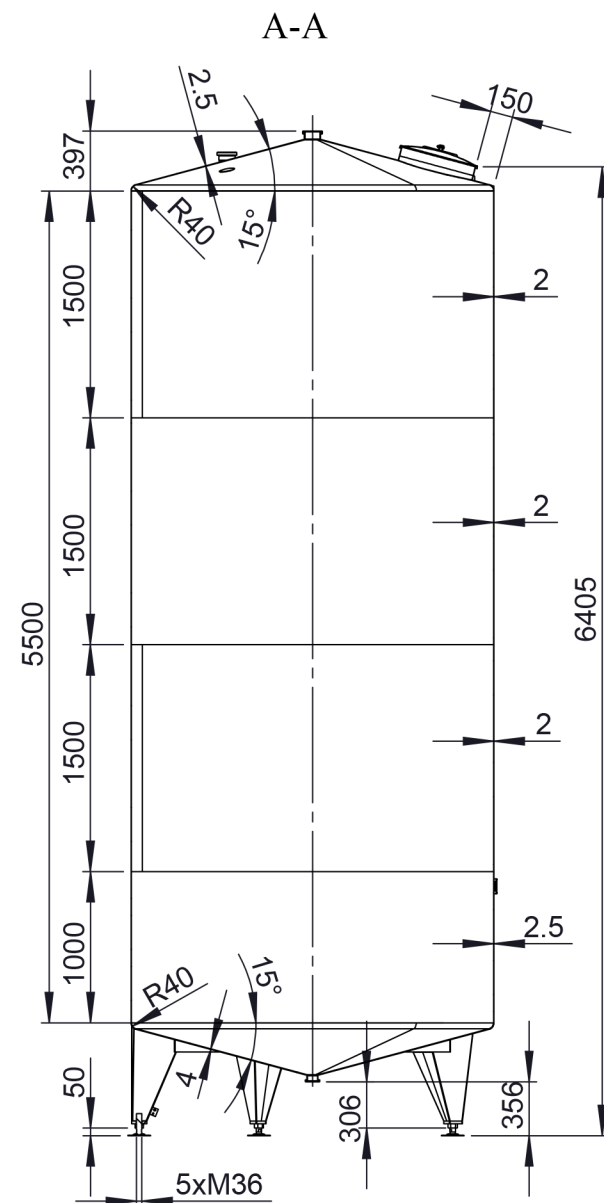
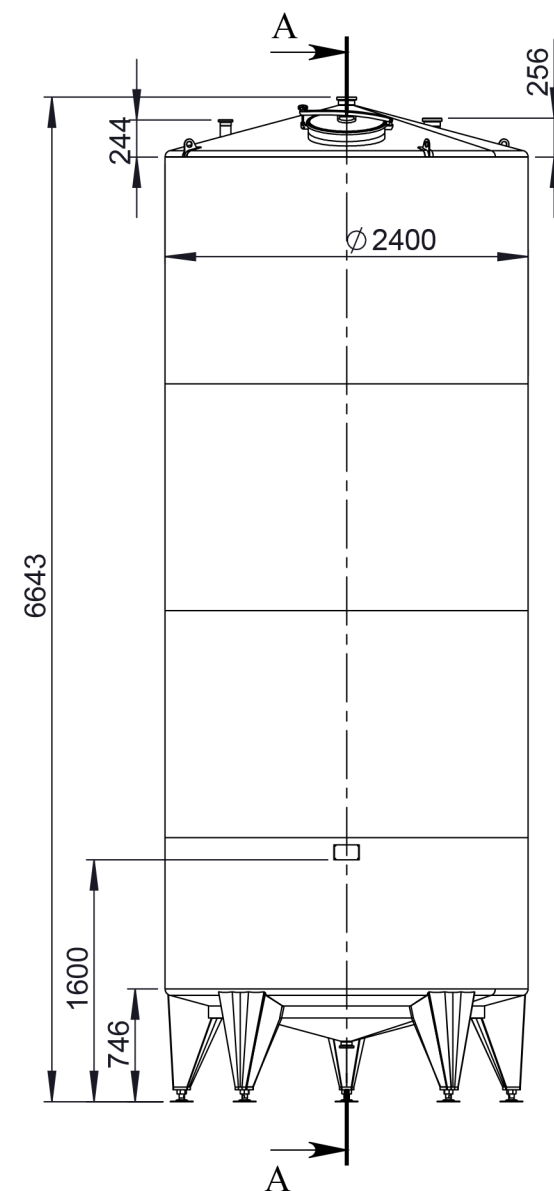


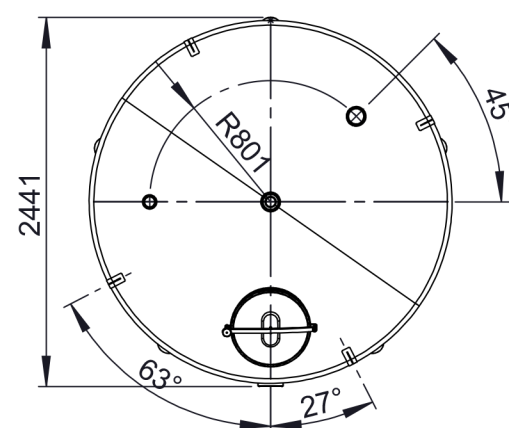

Revisions					
Rev	Description	Zone	Date	Drawn	Checked
A	Remove the elliptical manhole. Change the name of the tank. Change stock numbers.		10.09.18		

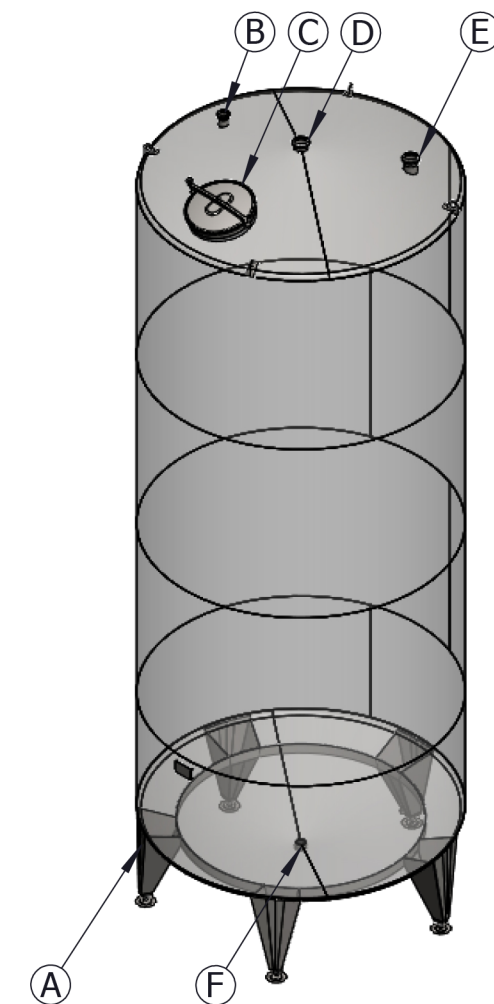


TYPE K3-SL	
Geometrical volume	26000 l
Working pressure	Atmospheric
Working temperature	-10/80°C
Maximum density	1.2kg/dm³
Tare mass	1035 kg
Equipment output/voltage	-
Geometrical volume - jacket	-
Working pressure - jacket	-
Working temperature - jacket	-
Jacket pressure drop	-
Material	1.4307/AISI 304L
Year of manufacture	-

TYPE K3-SL	
Geometrical volume	26000 l
Working pressure	Atmospheric
Working temperature	-10/80°C
Maximum density	1.2kg/dm ³
Tare mass	1035 kg
Equipment output/voltage	-
Geometrical volume - jacket	-
Working pressure - jacket	-
Working temperature - jacket	-
Jacket pressure drop	-
Material	1.4307/AISI 304L
Year of manufacture	-

Item	Description	PN	DN	Qty.
		bar	mm.	
A	LEG ON ADJUSTABLE SUPPORT	1	-	5
B	INLET DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN11851	1	65	1
C	UPPER MANHOLE DN500 Elica art.50/1p-4 WITH EPDM-FDA-GASKET	1	500	1
D	INLET DN100 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN100 DIN11851	1	100	1
E	INLET AIRVENT DN100 ON TANK TOP UP TO WELDING MALE DN100 DIN11851	1	100	1
F	TOTAL OUTLET DN65 UP TO WELDING MALE DN65 DIN11851	1	65	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside	Matt 2B	Weld. seams	Outside	Strip grinded 2x20 Ra<1,6
	Inside	Matt 2B		Inside	Strip grinded 2x20 Ra<1,6

1.6 	Drawn: B.K.	Scale 1:50	Weight 1035	1.4307/ AISI 304L				
	Checked: K.I.	26000L						
	Approved: D.M.				Rev	10.9.2018 г.	Lang Eng	Sheet 1/1