


## 2800 liter tank i Syrafast 316

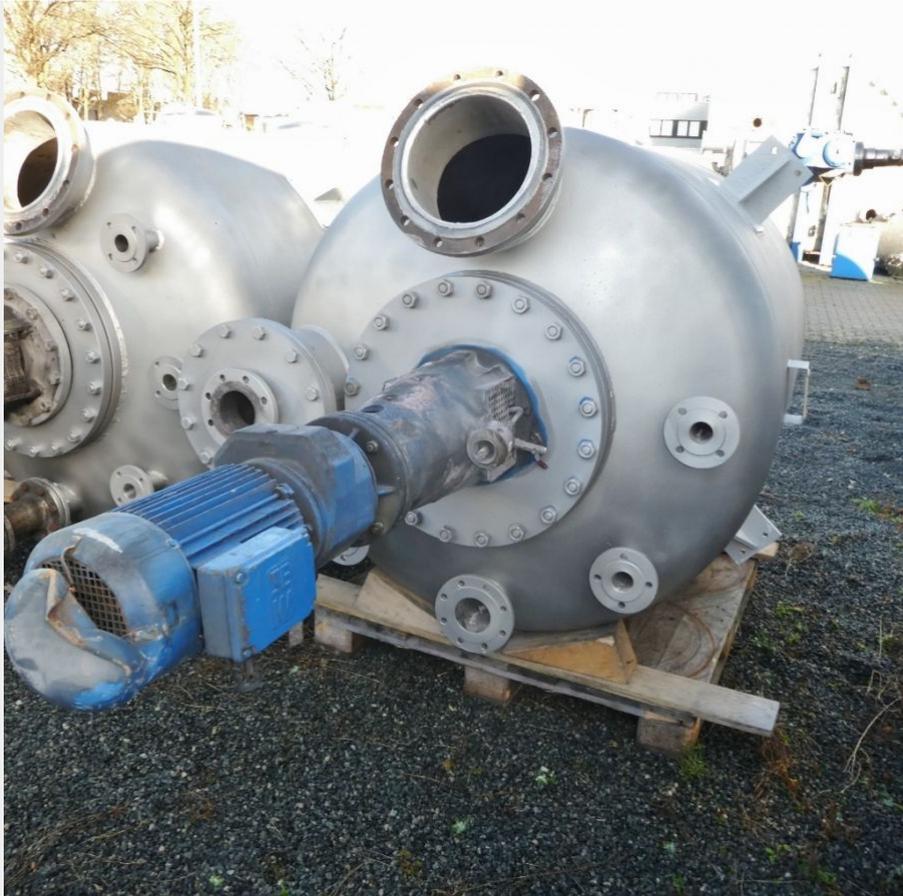

**81,000,00 kr /st exkl moms**

**Additional information:** Chemistry; Tank blasted and primed on the outside; 4 support brackets made of Fe; external surface damaged in places (possibly in need of repair); 1 tank with flange-mounted outlet fitting (the spout of this tank is slightly bent); some residues of previous content

**Volumetric volume (L):** 2.800 L

**Pressure in tank:** pressure and vacuum

**Max. pressure (Bar):** 6 Bar

**Min. pressure (Bar):** 1 Bar

**Max. temperature (°C):** 100 °C

**Material wet parts:** SS AISI 316 (V4A)

**Model:** vertical

**Configuration:** single-skin

**Heat exchanger:** no

**Insulation:** no

**Mobile tank:** no

**Total discharge:** yes

**Documents included:** no

**Technical drawing included:** no

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Outlet of tank:** flange DN80

**Agitator:** yes

**Number of revolutions:** 211

**Power:** 5

**Top:** 8 mm

**Cylinder:** 7 mm

**Bottom:** 6 mm

**Internal diameter tank:** 1.400 mm

**Cylinder height:** 1.400 mm

**Total height of tank:** 3.450 mm

**SKU:** 273721

## Mer information

### Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: pressure and vacuum

Konfiguration: single-skin

Max. arbetstemperatur: 100 °C

Mobil tank: Nej

Övrig information: Chemistry; Tank blasted and primed on the outside; 4 support brackets made of Fe; external surface damaged in places (possibly in need of repair); 1 tank with flange-mounted outlet fitting (the

Övrig information2: spout of this tank is slightly bent); some residues of previous content; we can't give any guarantees about the agitator

Omrörare: Ja

Övertryck: 6 Bar

Total urtappning: Ja

Undertryck (vakuum): 1 Bar

Trycktank: Ja

Uppvärmning/kylning: Nej

Vätskeberörd yta: SS AISI 316 (V4A)

Volym i liter: 2800

### Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej

### Översikt material

Material: Syrafast 316



## Dimensioner av tank

Cylinderhöjd: 1.400 mm  
Invändig diameter: 1.400 mm  
Total höjd: 3.450 mm

## Omrörare

Kraft (kW): 5  
Varvtal: 211

## Tjocklek på tank

Botten: 6 mm  
Cylinder: 7 mm  
Topp: 8 mm

## Mer

Isolerad: Nej