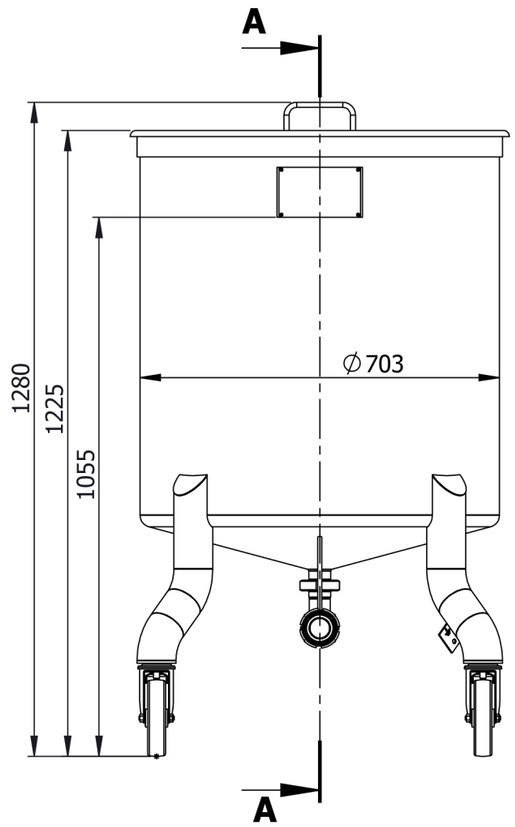


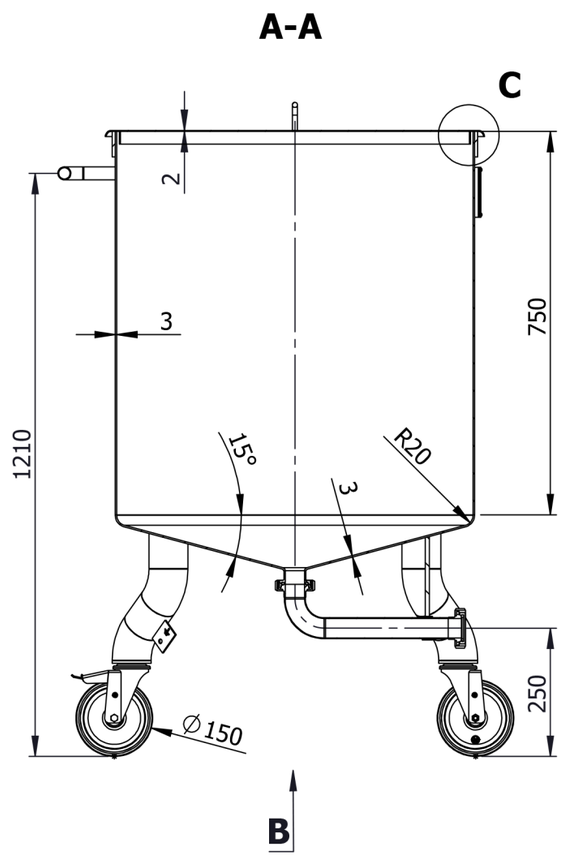


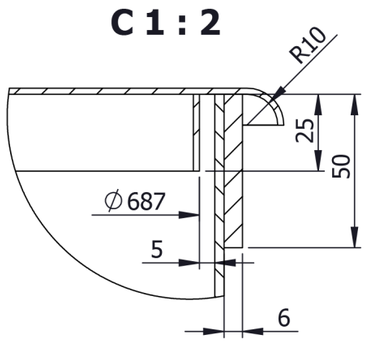


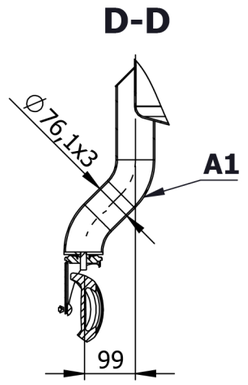


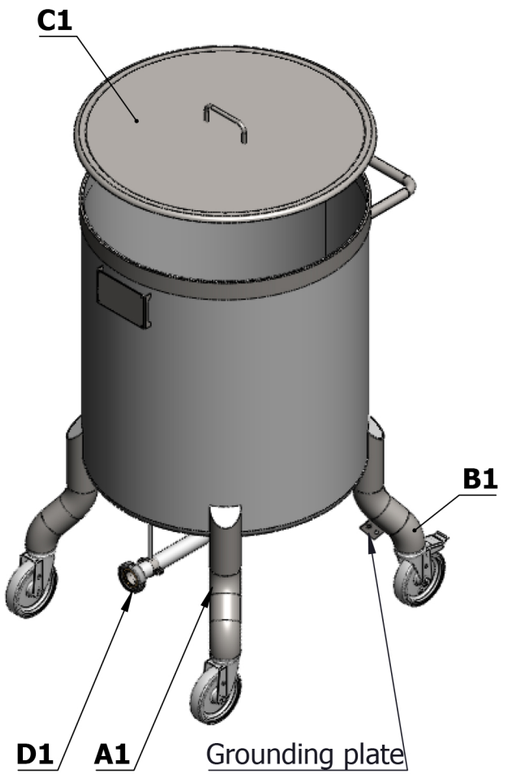


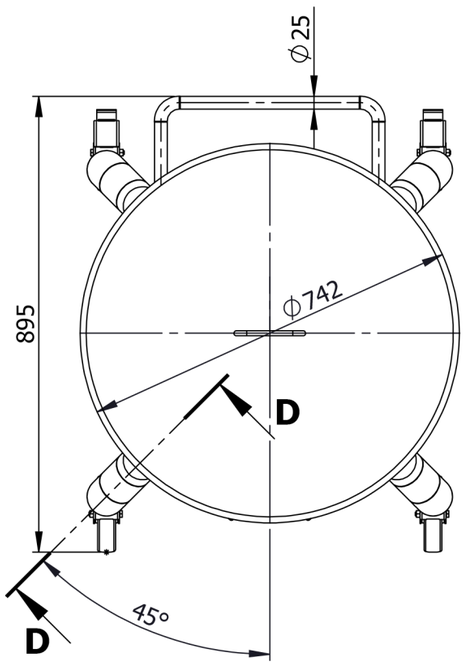


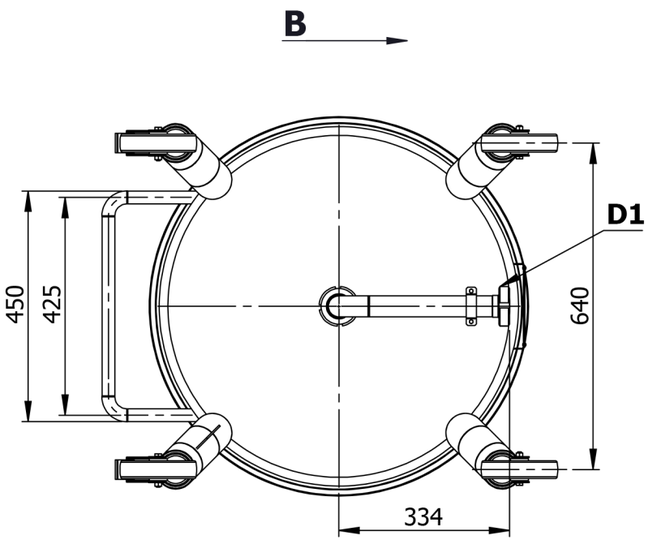


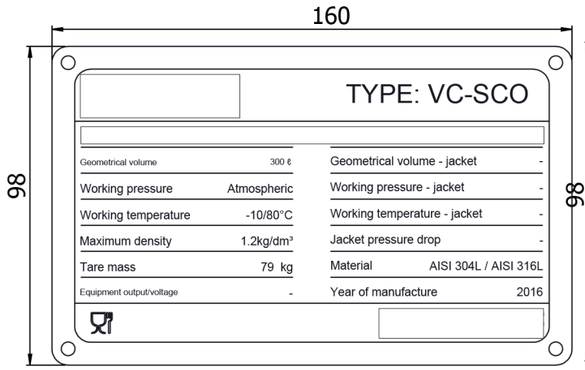


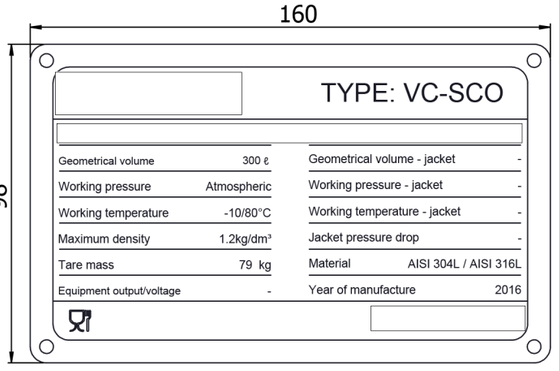


| Item | Description | PN MPa | DN mm. | Qty. |
|---|---|---|---|---|
| A1 | TUBULAR LEG ON WHEEL WITHOUT BREAK - AISI 304L | - | - | 2 |
| B1 | TUBULAR LEG ON WHEEL WITH BREAK - AISI 304L | - | - | 2 |
| C1 | DUST PROTECTIVE LID 2mm - AISI 316L | - | - | 1 |
| D1 | DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DIN 11851 - AISI 316L | atm. | 40 | 1 |

| | | | | | |
|---|---|---|---|---|---|
| Surface | Outside | Matt 2B | Welding seam | Outside | Strip grinded 2x20 Ra<1,6 |
| | Inside | Matt 2B | | Inside | Flat grinded to Ra<0,8 |

1.6 | min.0,5x45° | **Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006**

| | | | | | |
|---|---|---|---|---|---|
| Drawn: **K.N.** | Scale 1:12 | Weight 78.2 | AISI 316L AISI 304L | | |
| Checket: **K.I.** | | | | 0,3m3 | |
| Approved by: **D.M.** | | | 20.11.2015 г. | lang eng | Sheet 1/1 |