


3158 liter tank i Syrafast 316

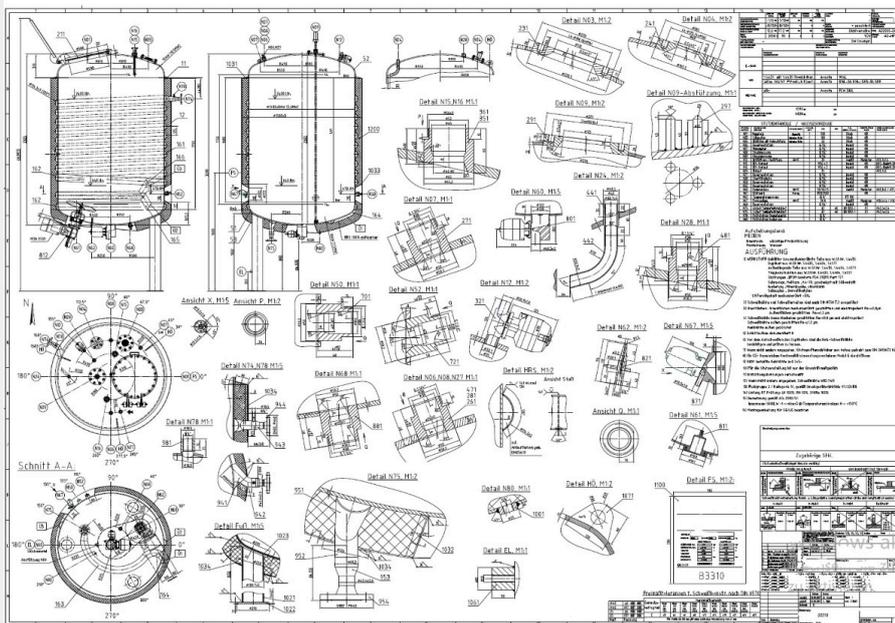

323,000,00 kr /st exkl moms

Additional information: tank is unused, was only filled with demineralised water for pressure testing

Volumetric volume (L): 3.158 L

Pressure in tank: ATM - atmosferic

Max. pressure (Bar): 6 Bar

Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C

Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: single jacketed with heat-exchanger

Heat exchanger: yes

Insulation: no

Mobile tank: no

Total discharge: no

Volume: 90 L

Max Overpressure: 10 Bar

Max onderdruk: 1 Bar

Max. working temperature: 150 °C

Type HE on the cylinder: half pipe welded onto the outside of the innertank

Heat exchanger: RVS 316

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: headside

Outlet of tank: available

Top: 10,50 mm

Cylinder: 5,60 mm

Bottom: 7,50 mm

Internal diameter tank: 1.400 mm

Outer diameter tank: 1.580 mm

Cylinder height: 1.680 mm

SKU: 313229

Mer information
