

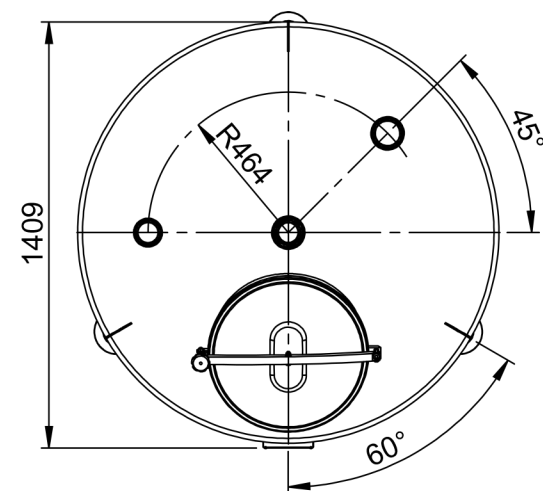
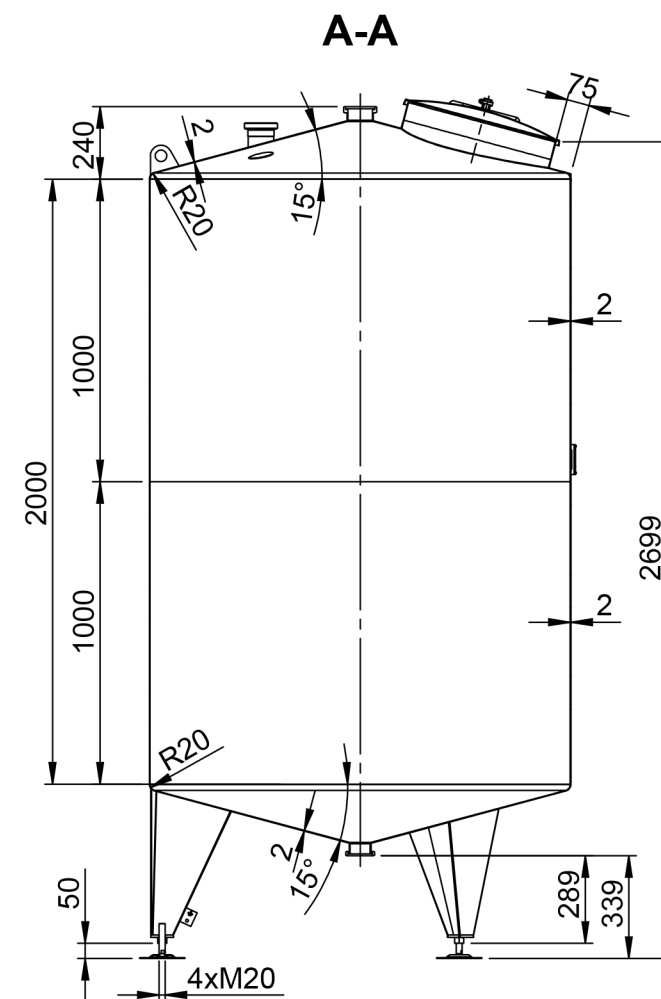


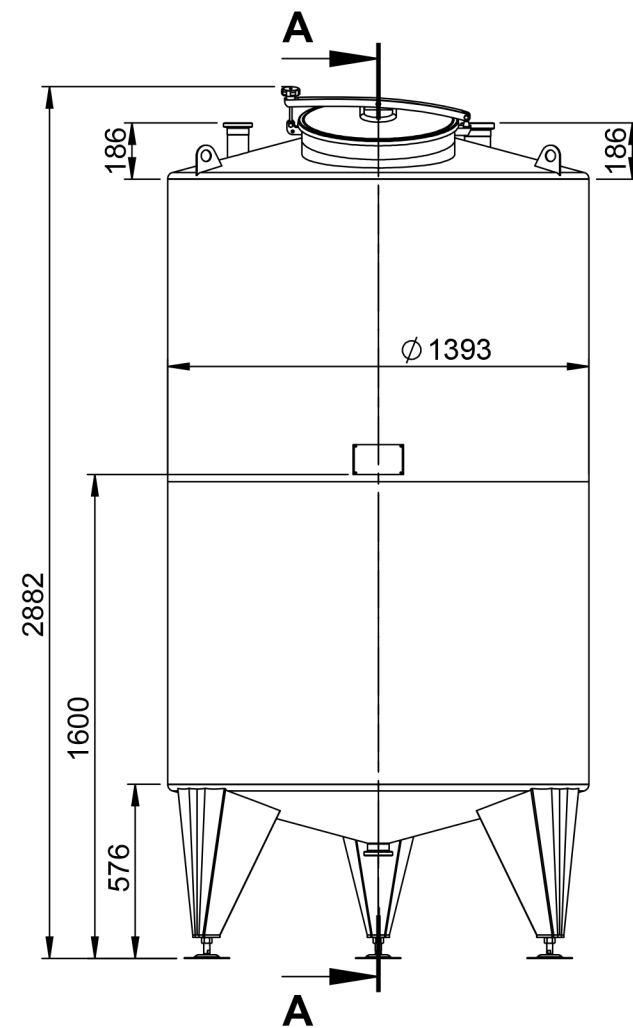

Geometrical volume		3200 ℓ	Geometrical volume - jacket		-
Working pressure		Atmospheric	Working pressure - jacket		-
Working temperature		-10/80°C	Working temperature - jacket		-
Maximum density		1.2kg/dm³	Jacket pressure drop		-
Tare mass		226 kg	Material		1.4404/ AISI 316L
Equipment output/voltage		-	Year of manufacture		

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

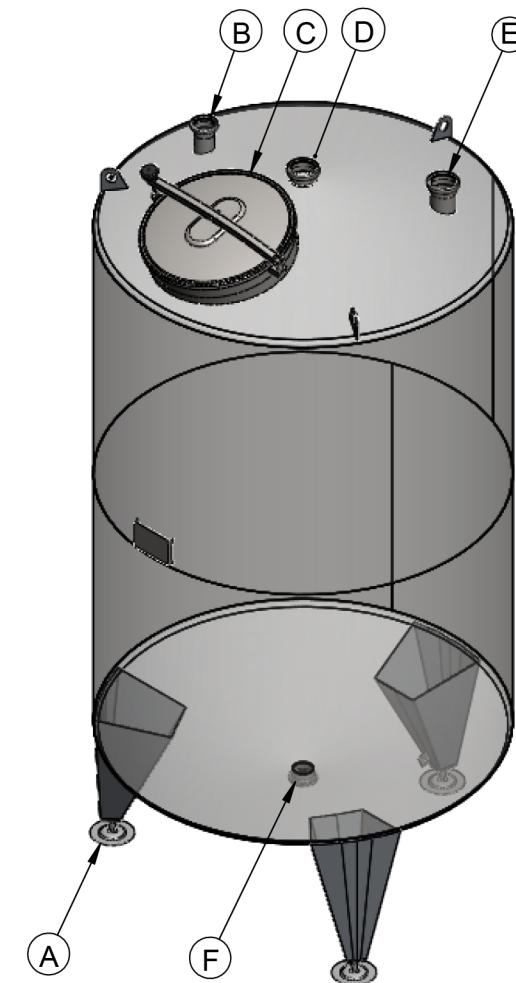

Item	Description	PN	DN	Qty.												
		bar	mm.													
A	LEG ON ADJUSTABLE SUPPORT	-	-	4												
B	INLET DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN11851	atm.	65	1												
C	UPPER MANHOLE DN500 Elica art.50/1p-6 WITH EPDM-FDA-GASKET	atm.	500	1												
D	INLET DN80 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN80 DIN11851	atm.	80	1												
E	INLET AIRVENT DN80 ON TANK TOP UP TO WELDING MALE DN80 DIN 11851	atm.	80	1												
F	TOTAL OUTLET DN65 UP TO WELDING MALE DN65 DIN11851	atm.	65	1												
Straightness, flatness and parallelism - EN 13920 F							Linear dimensions - EN 13920 B									
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12	
Surface	Outside			Matt 2B				Weld. seams	Outside			Strip grinded 2x20 Ra<1,6				
	Inside			Matt 2B					Inside			Strip grinded 2x20 Ra<1,6				
			Drawn: I.N.				Scale 1:25	Weight 226	1.4404/ AISI 316L							
			Checked: K.I.				3200L									
			Approved: D.M.								Rev				Lang Eng	Sheet 1/1