
4000 liter tank i Syrafast 316

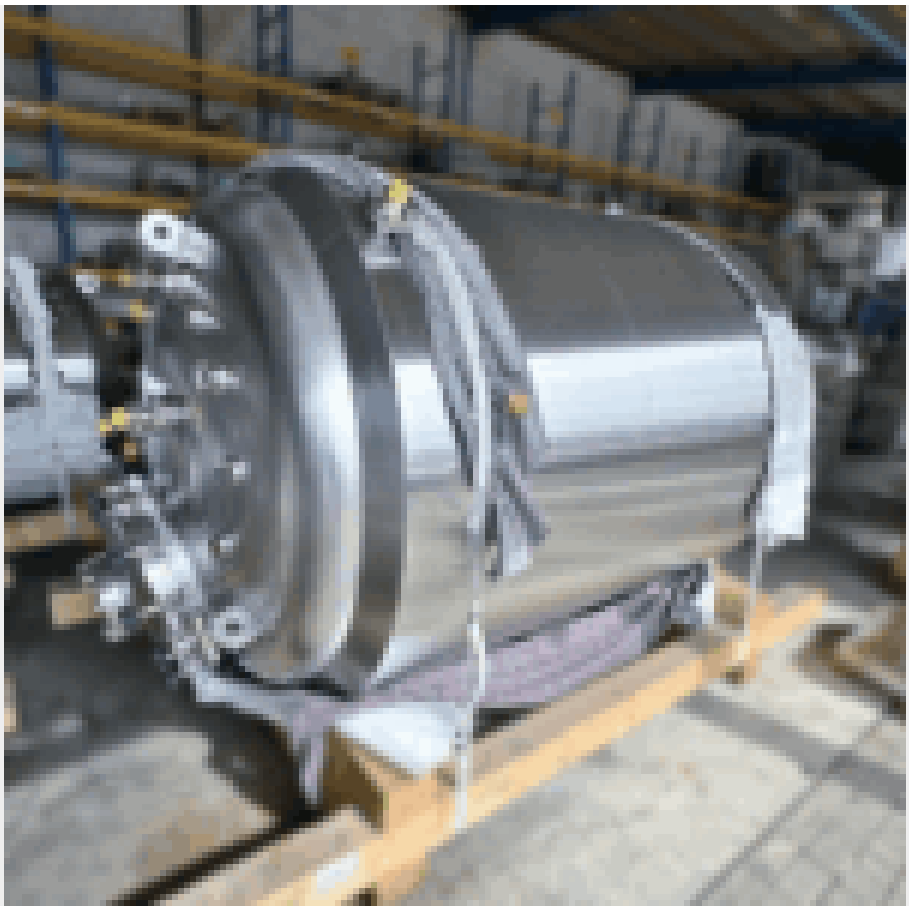

480 000 SEK /st exkl moms

Additional information: Fully comprehensive documentation in accordance with pharmaceutical industry standards included in the scope of delivery; device was manufactured for a global pharmaceutical company but never put into operation there; hand hole with sight glass diameter: 150 mm; incl. Südmo single seat valve SVP (outlet)
Volumetric volume (L): 4.000 L

Pressure in tank: pressure and vacuum
Max. pressure (Bar): 6 Bar
Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C
Material wet parts: SS AISI 316 (V4A)
Model: vertical
Configuration: insulated
Heat exchanger: no

Insulation: yes
Mobile tank: no
Total discharge: yes
Volume: 184 L
Max Overpressure: 6 Bar

Max onderdruk: 1 Bar
Max. working temperature: 150 °C
Type HE on the cylinder: half pipe welded onto the outside of the innertank
Documents included: no
Technical drawing included: no

Registration plate on the tank: yes
Flange for agitator: no
Position of manway: headside
Outlet of tank: available
Top: 15 mm

Cylinder: 6 mm
Bottom: 10 mm
Internal diameter tank: 1.600 mm
Outer diameter tank: 1.830 mm
Cylinder height: 1.930 mm

Total height of tank: 3.695 mm
Empty weight tank: 2.050

SKU: 441356

Mer information

Beskrivning av produkt

Material: Syrafast 316
Modell: Vertikal
Nytillverkad/Begagnad: Begagnad
Arbetstryck i tank: pressure and vacuum
Konfiguration: insulated with heat-exchanger
Max. arbetstemperatur: 150 °C
Mobil tank: Nej
Övrig information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass
Övrig information2: diameter: 150mm; incl. Südmo single-seat valve SVP (outlet); we can't give any guarantees about the heating/cooling jacket
Omrörare: Nej
Övertryck: 6 Bar
Total urtappning: Ja
Undertryck (vakuum): 1 Bar
Trycktank: Ja
Uppvärmning/kylning: Ja
Vätskeberörd yta: SS AISI 316 (V4A)
Volym i liter: 4000

Utrustning

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Ja
Teknisk ritning finns: Nej

Översikt material
Material: Syrafast 316

Dimensioner av tank
Cylinderhöjd: 1.930 mm
Invändig diameter: 1.600 mm
Total höjd: 3.695 mm
Ytterdiameter: 1.830 mm

Tjocklek på tank
Botten: 10 mm
Cylinder: 6 mm
Topp: 15 mm

Mer
Isolerad: Ja
Vikt: 2.050

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se