


## 4000 liter tank i Syrafast 316

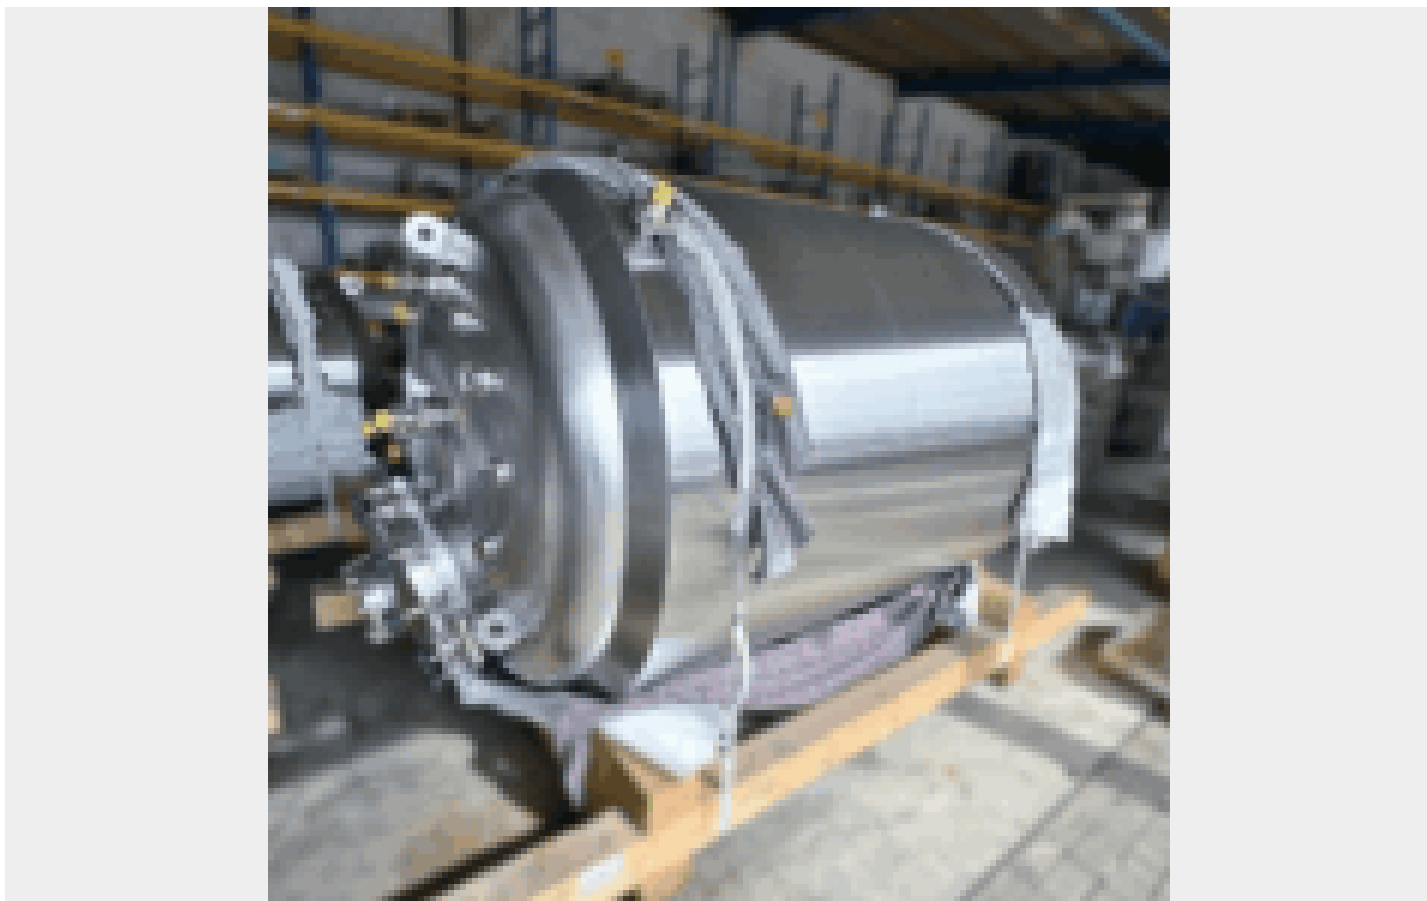

**478 000 SEK /st exkl moms**

**Additional information:** Fully comprehensive documentation in accordance with pharmaceutical industry standards included in the scope of delivery; device was manufactured for a global pharmaceutical company but never put into operation there; hand hole with sight glass diameter: 150 mm; incl. Südmo single seat valve SVP (outlet)

**Volumetric volume (L):** 4.000 L

**Pressure in tank:** vacuum

**Max. pressure (Bar):** 6 Bar

**Min. pressure (Bar):** 1 Bar

**Max. temperature (°C):** 150 °C

**Material wet parts:** SS AISI 316 (V4A)

**Model:** vertical

**Configuration:** insulated

**Heat exchanger:** no

**Insulation:** yes

**Mobile tank:** no

**Total discharge:** yes

**Volume:** 184 L

**Max Overpressure:** 6 Bar

**Max onderdruk:** 1 Bar

**Max. working temperature:** 150 °C

**Type HE on the cylinder:** half pipe welded onto the outside of the innertank

**Documents included:** no

**Technical drawing included:** no

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Position of manway:** headside

**Outlet of tank:** available

**Top:** 15 mm

**Cylinder:** 6 mm

**Bottom:** 10 mm

**Internal diameter tank:** 1.600 mm

**Outer diameter tank:** 1.830 mm

**Cylinder height:** 1.930 mm

**Total height of tank:** 3.695 mm

**Empty weight tank:** 2.050

**SKU:** 441356

## Mer information

### Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: pressure and vacuum

Konfiguration: insulated with heat-exchanger

Max. arbetstemperatur: 150 °C

Mobil tank: Nej

Övrig information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass

Övrig information2: diameter: 150mm; incl. Südmo single-seat valve SVP (outlet); we can't give any guarantees about the heating/cooling jacket

Omrörare: Nej

Övertryck: 6 Bar

Total urtappning: Ja

Undertryck (vakuum): 1 Bar

Trycktank: Ja

Uppvärmning/kylning: Ja

Vätskeberörd yta: SS AISI 316 (V4A)

Volym i liter: 4000

### Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej



## Översikt material

Material: Syrafast 316

## Dimensioner av tank

Cylinderhöjd: 1.930 mm

Invändig diameter: 1.600 mm

Total höjd: 3.695 mm

Ytterdiameter: 1.830 mm

## Tjocklek på tank

Botten: 10 mm

Cylinder: 6 mm

Topp: 15 mm

## Mer

Isolerad: Ja

Vikt: 2.050