
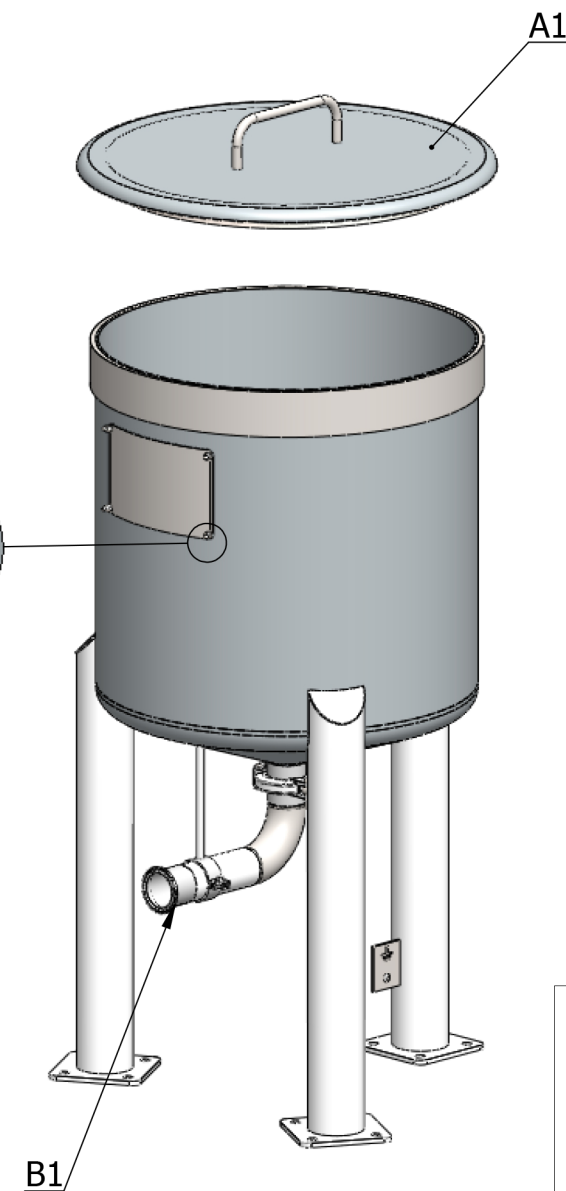


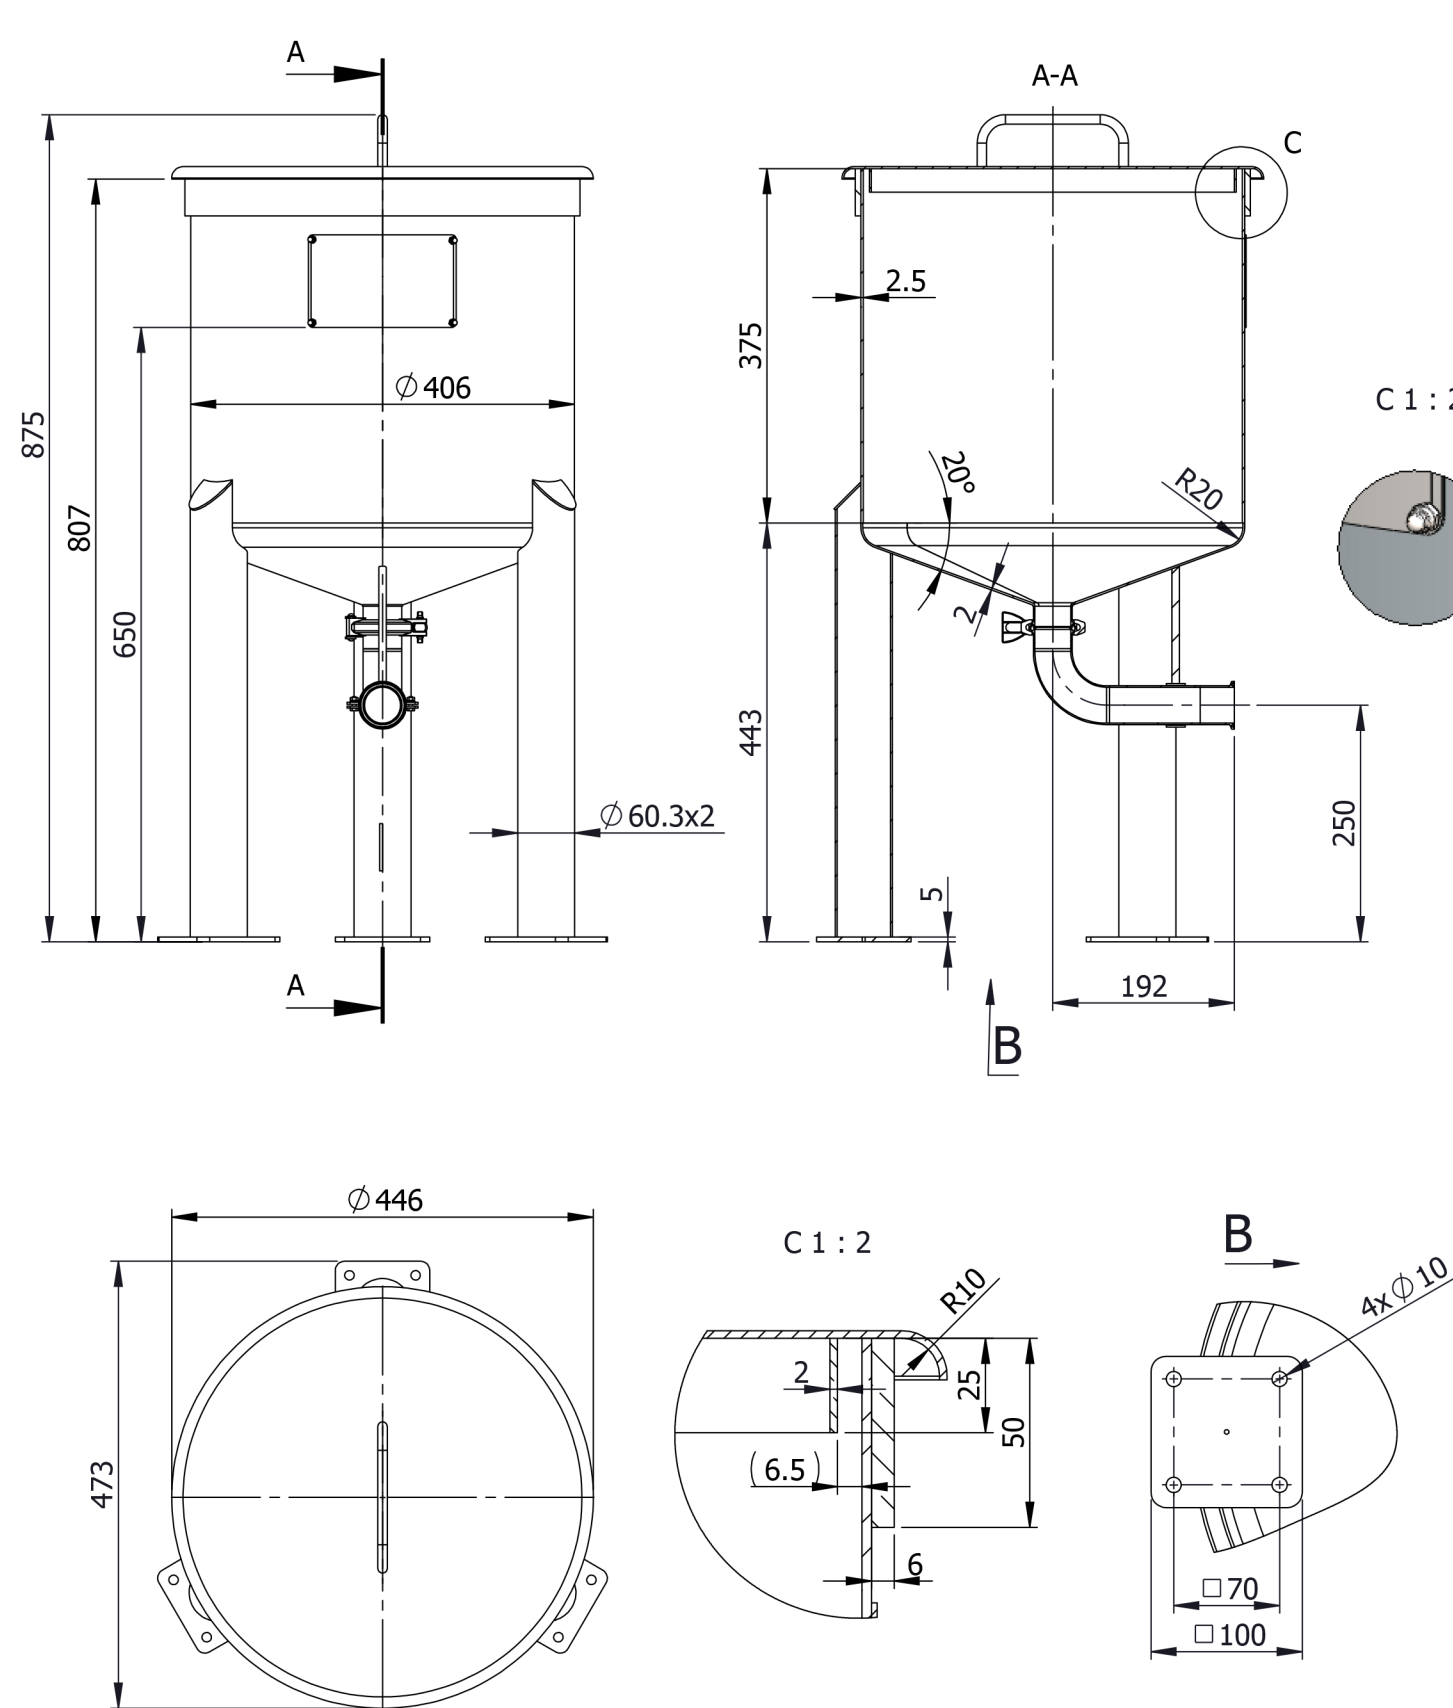

Geometrical volume		50 ℓ	Geometrical volume - jacket	-
Working pressure		Atmospheric	Working pressure - jacket	-
Working temperature		-10/80°C	Working temperature - jacket	-
Maximum density		1.2kg/dm³	Jacket pressure drop	-
Tare mass		30 kg	Material	AISI 304L / AISI 316L
Equipment output/voltage		-	Year of manufacture	2016

Item	Description	PN	DN	Qty.					
		bar	mm.						
A1	DUST PROTECTIVE LID - AISI 316L	atm.	-	1					
B1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING CLAMP DIN 32676- AISI 316L	atm.	40	1					
Surface	Outside	Matt 2B	Welding seam	Outside	flat grinded to Ra<0.8				
	Inside	Matt 2B		Inside	flat grinded to Ra<0.8				
				Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006					
		Drawn: I.N.		Scale 1:8	Weight 24.4	AISI 316L AISI 304L			
		Checket: K.I.		:50 L					
		Approved by: D.M.					17.02.16	lang eng	Sheet 1/1