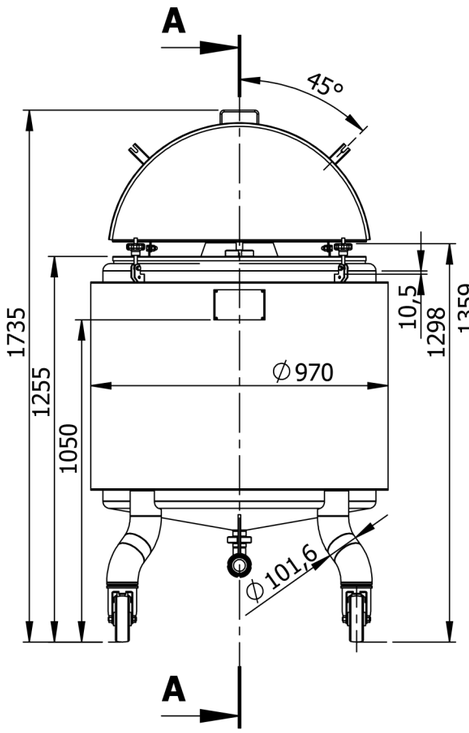

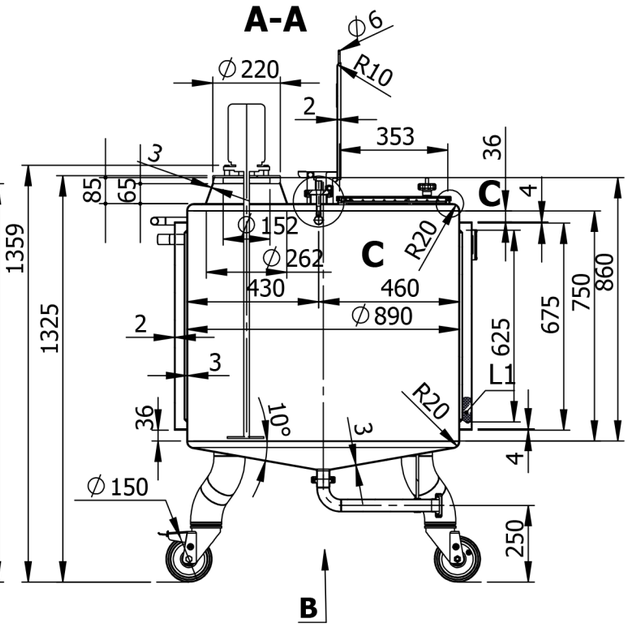

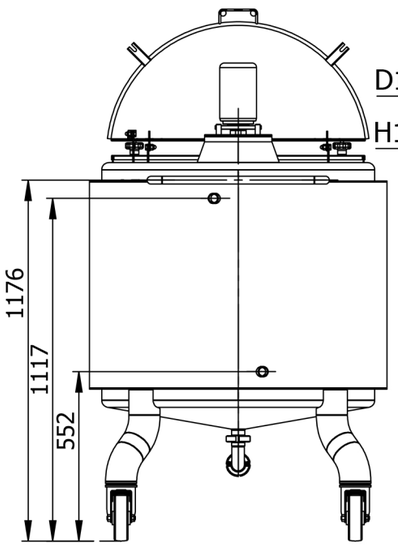

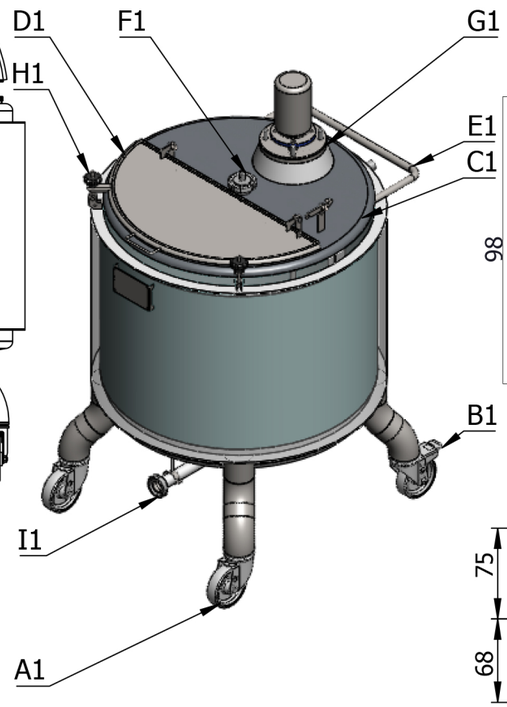



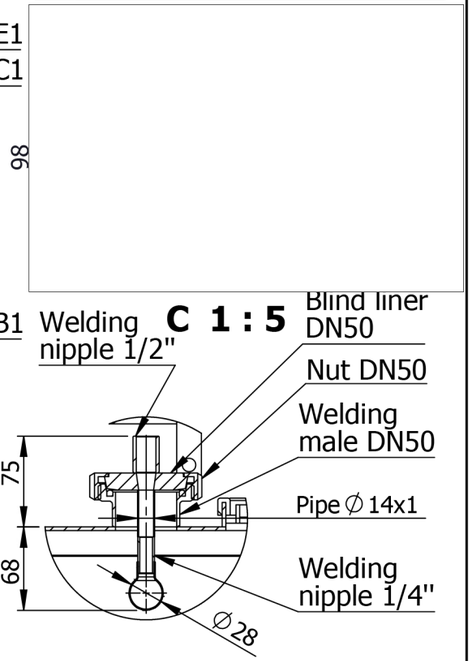



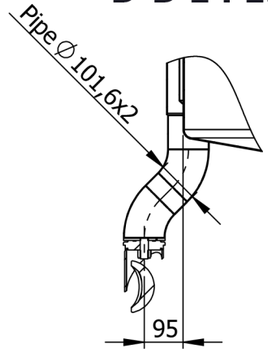

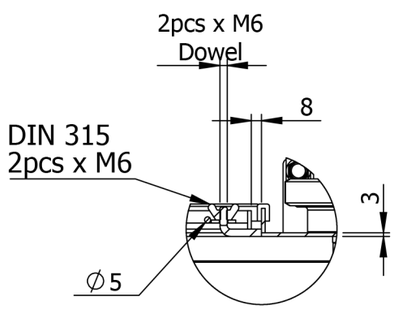

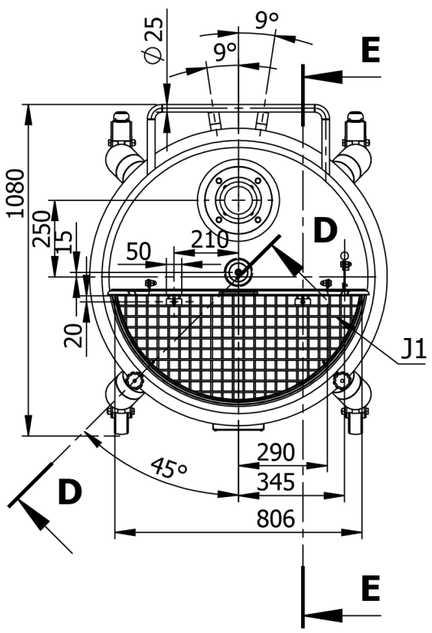

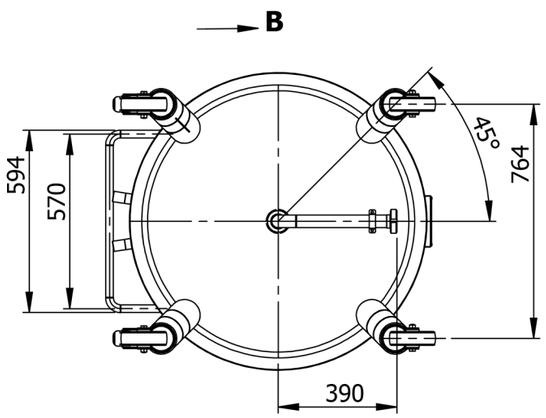

Item	Description	PN bar	DN mm.	Qty.
A1	TUBULAR LEG ON WHEEL WITHOUT BREAK - AISI 304L	-	-	2
B1	TUBULAR LEG ON WHEEL WITH BREAK - AISI 304L	-	-	2
C1	1/2 FIXED LID 3mm - AISI 316L	-	-	1
D1	1/2 HINGED LID 2mm - AISI 316L	-	-	1
E1	HOLDER FOR PUSHING THE TANK - AISI 304L	-	-	1
F1	DISMOUNTABLE STATIC CIP SPRAY BALL Φ28 360° UP TO WELDING MALE NIPPLE 1/2" - AISI 316L	atm.	G1/2"	1
G1	CONICAL INLET FOR AGITATOR UP TO FLANGE Φ220mm - AISI 316L	atm.	100	1
H1	TIGHTNER FOR HINGED LID	-	-	1
I1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DIN 11851 - AISI 316	atm.	40	1
J1	SAFETY GRID ON HINGED LID - AISI 316L	-	-	1
K1	DIMPLE JACKET ON TANK SHELL H=625mm F=1.68m2 Pmax=3bar Tmax=100˚C - AISI 304L INLET/OUTLET JACKET UP TO WELDING MALE NIPPLE G1"	3	G1"	1
L1	INSULATION MINERAL WOOL 40mm WITH DECORATIVE CASING FOR DIMPLE JACKET ON TANK SHELL D=970mm H=675mm 2.0mm - AISI 304L	-	-	1

Surface			Welding seam		
	Outside	Matt 2B		Outside	strip grinded to Ra<1,6
	Inside	Matt 2B		Inside	flat grinded to Ra<0,8

1.6 | min.0,5x45° | **Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006**

Drawn: **S.S**	Scale 1:20	Weight 200	AISI 316L/ AISI 304L	
Checket: **K.I**				0.5m3
Approved by:			27.10.2015 г.	lang eng / Sheet 1/1