

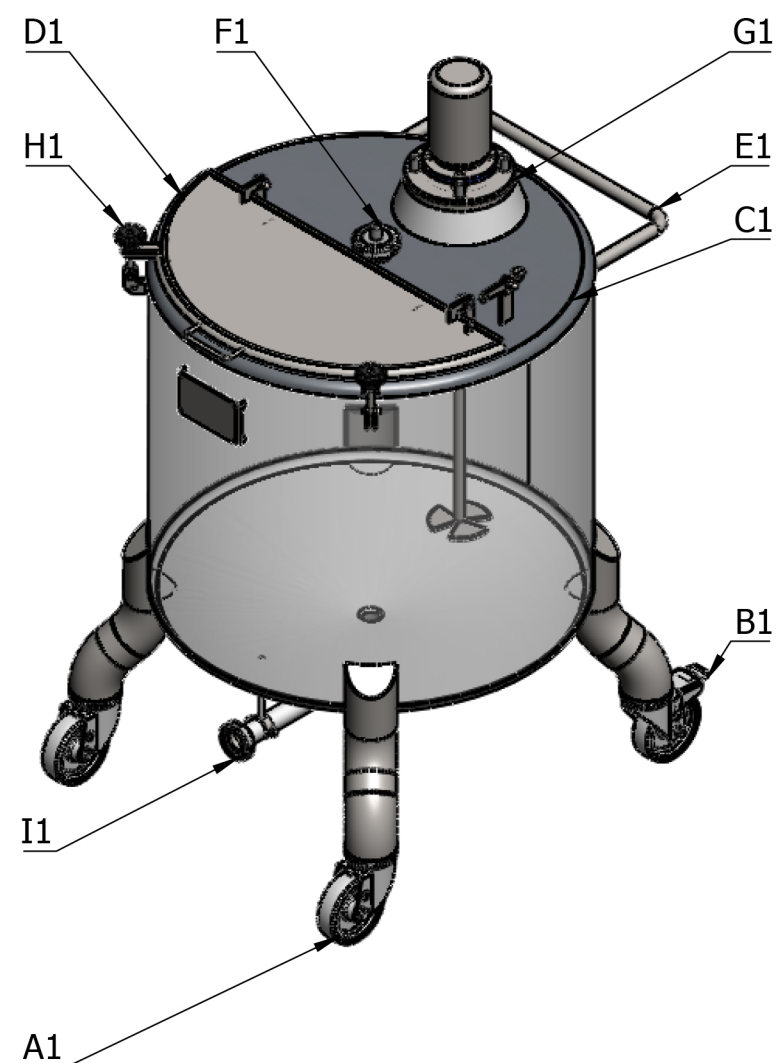


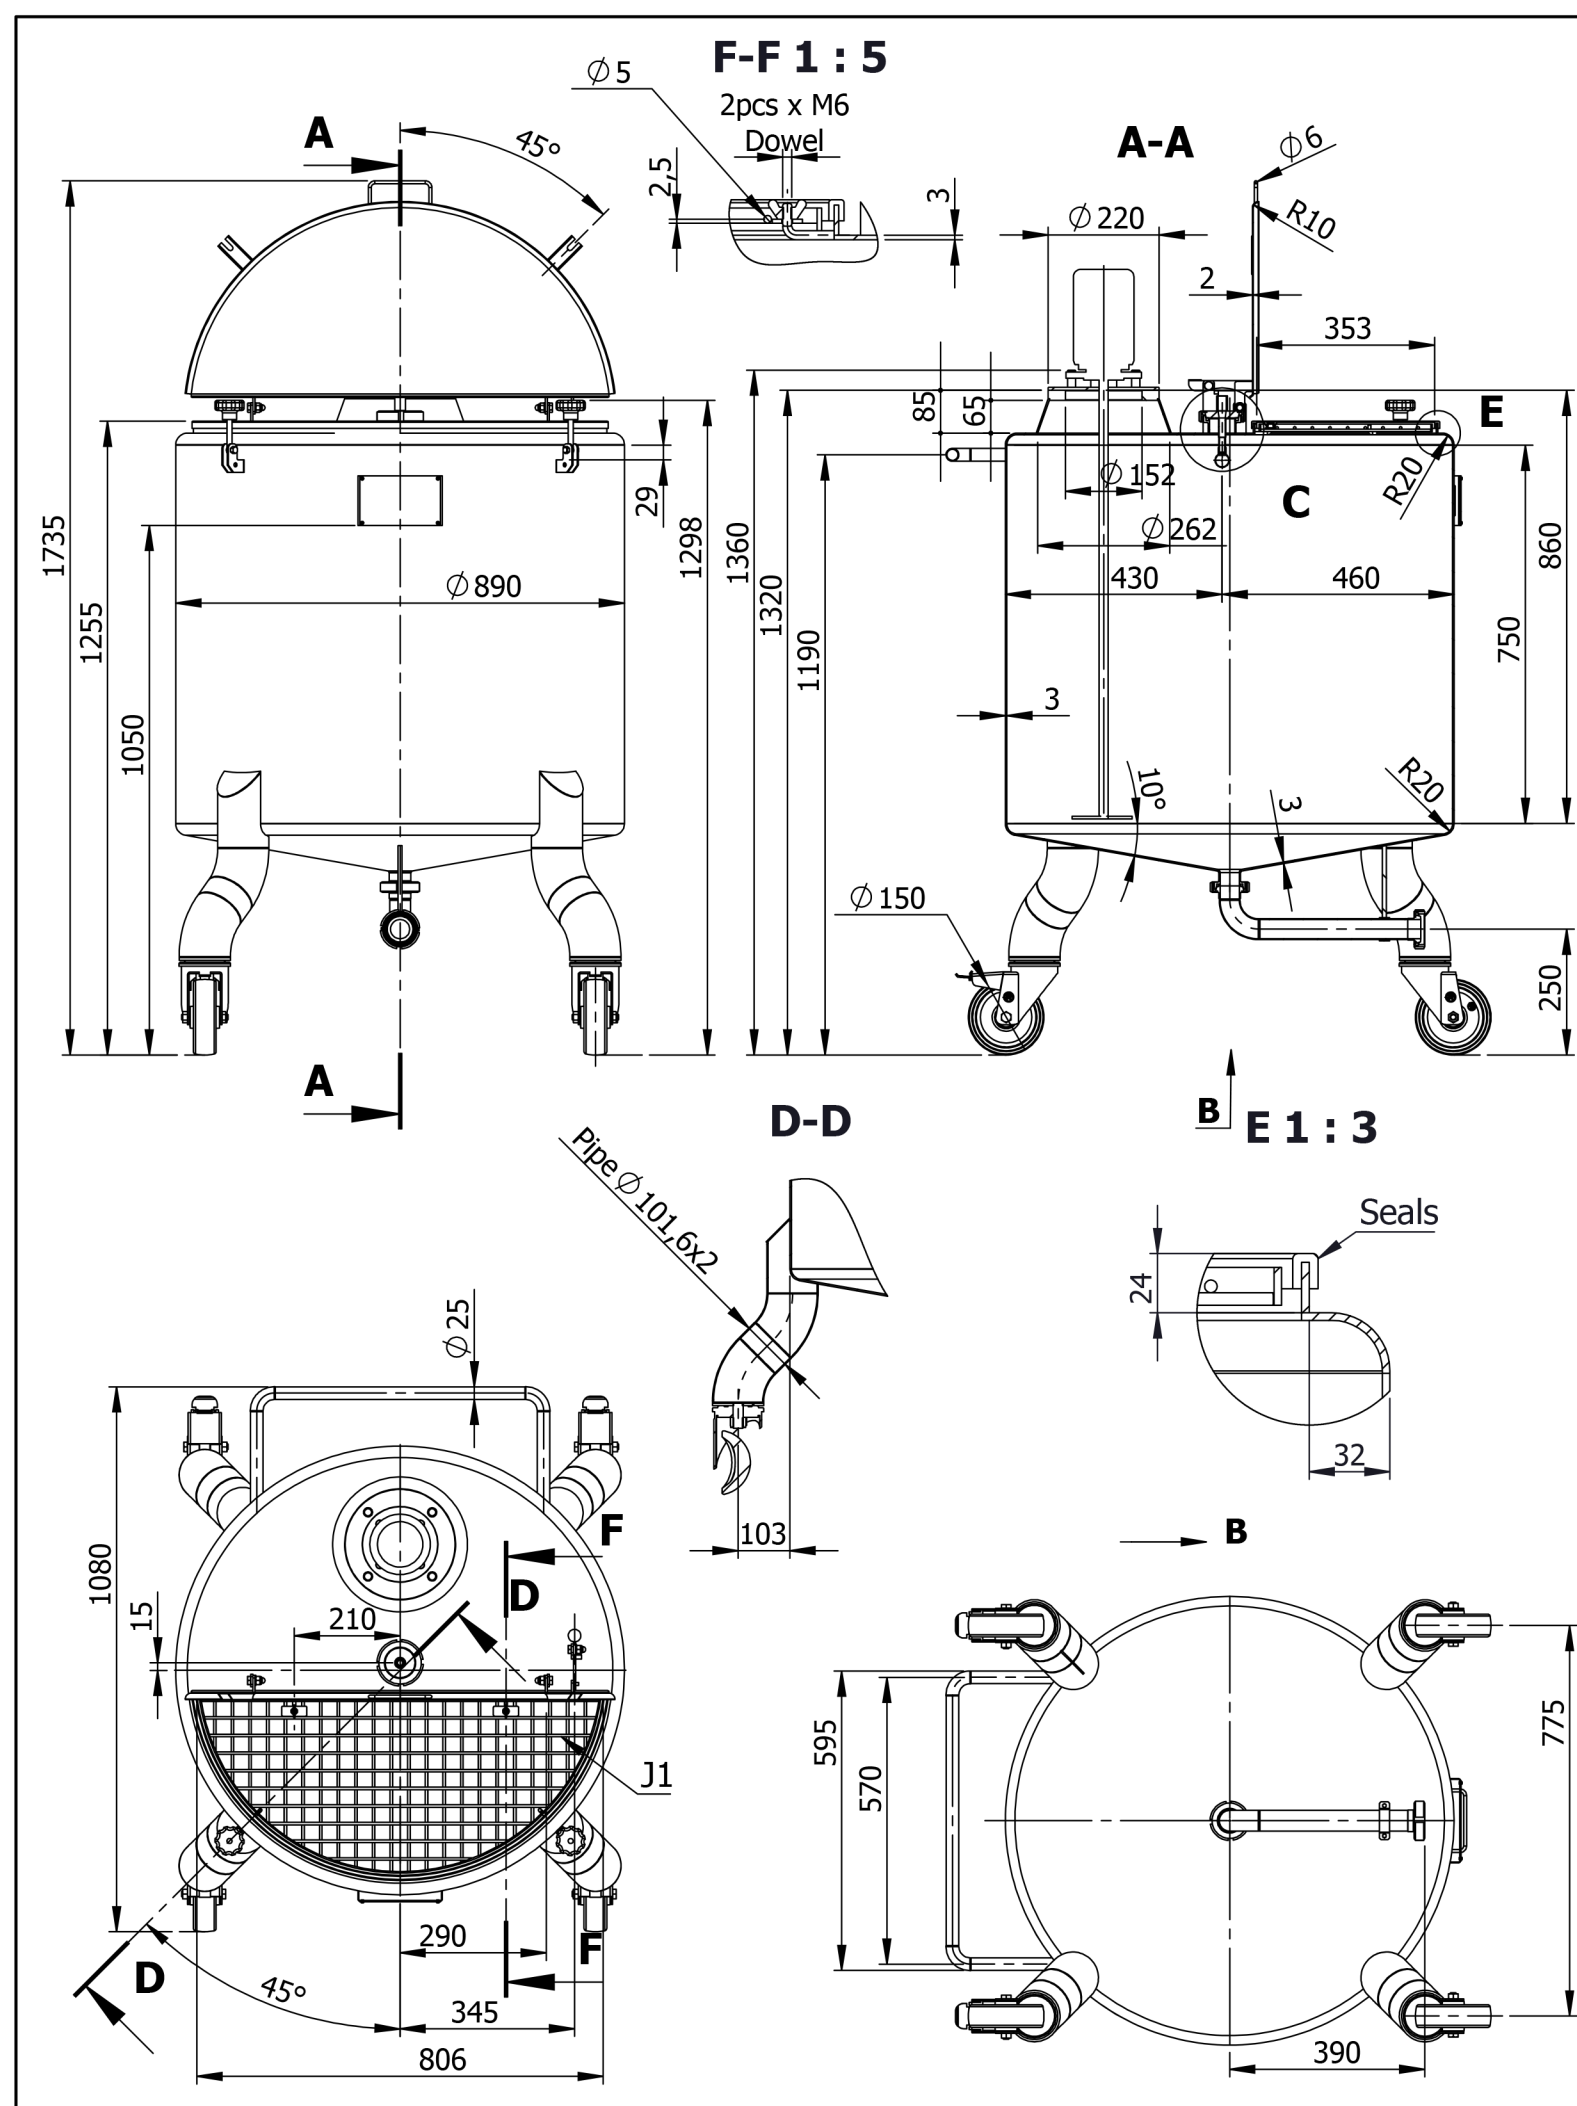

Geometrical volume		500 l	Geometrical volume - jacket	-
Working pressure		Atmospheric	Working pressure - jacket	-
Working temperature		-10/80°C	Working temperature - jacket	-
Maximum density		1.2kg/dm³	Jacket pressure drop	-
Tare mass		130 kg	Material	AISI 304L / AISI 316L
Equipment output/voltage		-	Year of manufacture	2016

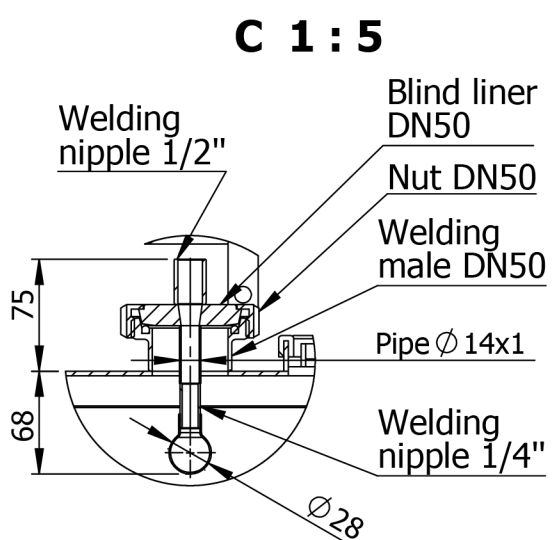

Item	Description	PN bar	DN mm.	Qty.
A1	TUBULAR LEG ON WHEEL WITHOUT BREAK - AISI 304L	-	-	2
B1	TUBULAR LEG ON WHEEL WITH BREAK - AISI 304L	-	-	2
C1	1/2 FIXED LID 3mm - AISI 316L	-	-	1
D1	1/2 HINGED LID 2mm - AISI 316L	-	-	1
E1	HOLDER FOR PUSHING THE TANK - AISI 304L	-	-	1
F1	DISMOUNTABLE STATIC CIP SPRAY BALL $\varnothing 28$ 360° UP TO WELDING MALE NIPPLE 1/2" - AISI 316L	atm.	G1/2"	1
G1	CONICAL INLET FOR AGITATOR UP TO FLANGE $\varnothing 220$ mm - AISI 316L	-	100	1
H1	TIGHTNER FOR HINGED LID	-	-	2
I1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DIN 11851 - AISI 316L	atm.	40	1
J1	SAFETY GRID ON HINGED LID - AISI 316L	-	-	1

Surface	Outside	Matt 2B	Welding seam	Outside	strip grinded to Ra<1,6		
	Inside	Matt 2B		Inside	flat grinded to Ra<0,8		
1.6 		min.0,5x45° 	Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006				
		Drawn: S.S	Scale 1:15	Weight 130	AISI 316L/ AISI 304L		
		Checket: K.I	:0.5m3				
		Approved by:					
					26.10.2015r.	lang eng	Sheet 1/1