

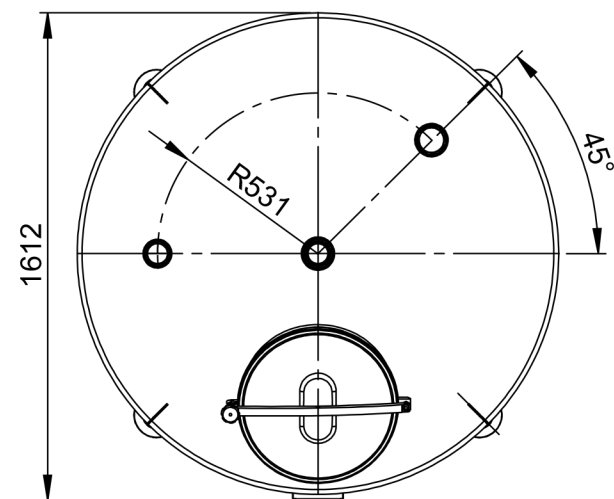
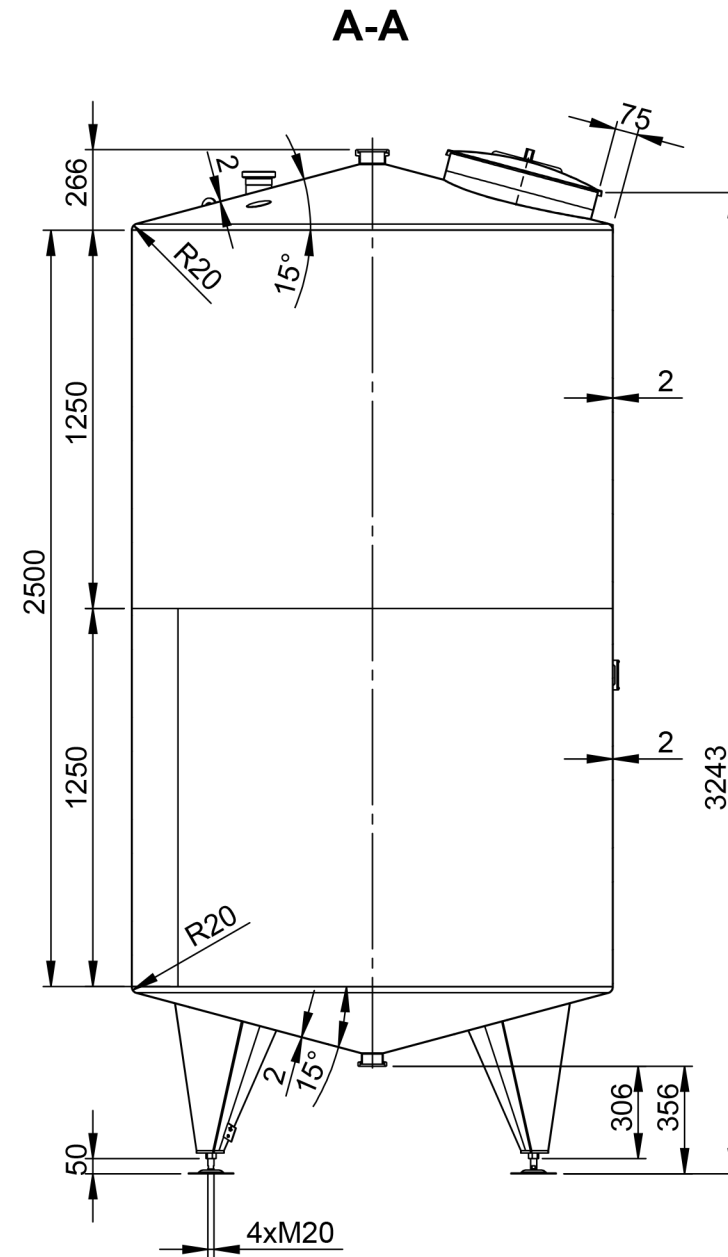


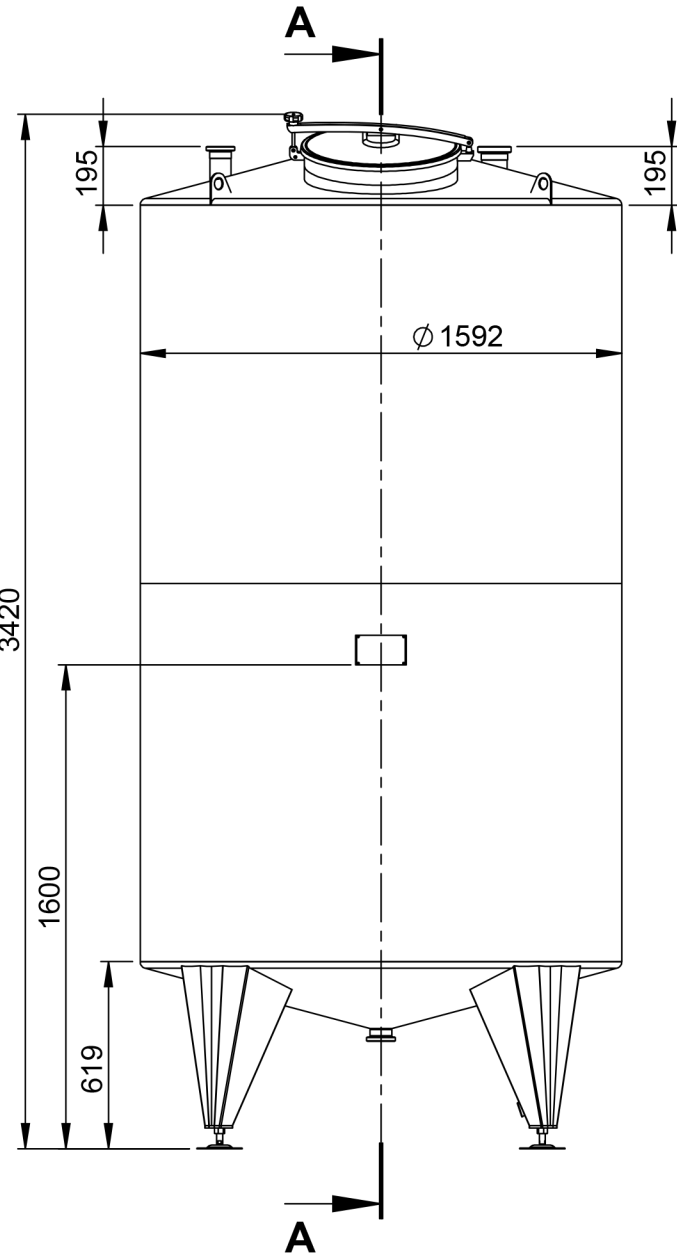

Geometrical volume		5200 l	Geometrical volume - jacket		-
Working pressure		Atmospheric	Working pressure - jacket		-
Working temperature		-10/80°C	Working temperature - jacket		-
Maximum density		1.2kg/dm³	Jacket pressure drop		-
Tare mass		313 kg	Material		1.4404/AISI 316L
Equipment output/voltage		-	Year of manufacture		-

Revisions

Rev	Description	Date	Drawn	Checked	Rev. DD

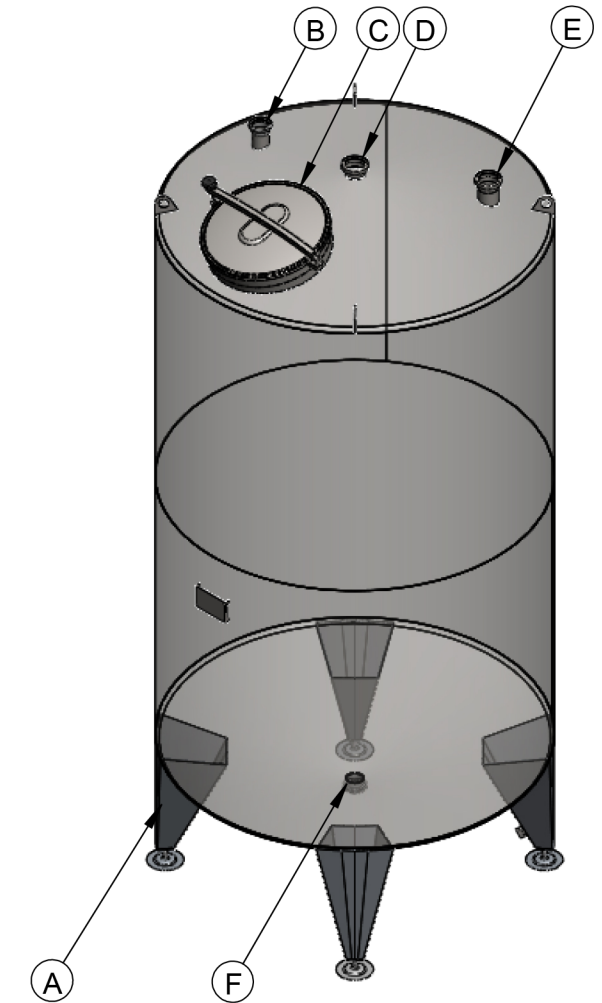

Item	Description	PN	DN	Qty.
		bar	mm.	
A	LEG ON ADJUSTABLE SUPPORT	-	-	4
B	INLET DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN11851	atm.	65	1
C	UPPER MANHOLE DN500 Elica art.50/1p-6 WITH EPDM-FDA-GASKET	atm.	500	1
D	INLET DN80 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN80 DIN11851	atm.	80	1
E	INLET AIR VENT DN80 ON TANK TOP UP TO WELDING MALE DN80 DIN11851	atm.	80	
F	TOTAL OUTLET DN65 UP TO WELDING MALE DN65 DIN11851	atm.	65	1

Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12

Surface	Outside		Matt 2B		Weld. seams	Outside		Strip grinded 2x20 Ra<1,6	
	Inside		Matt 2B			Inside		Strip grinded 2x20 Ra<1,6	

		Drawn: K.N.		Scale 1:25		Weight 313		1.4404/ AISI 316L			
		Checked: K.I.		5200L							
		Approved: D.M.						Rev			
										Lang Eng	
										Sheet 1/1	