

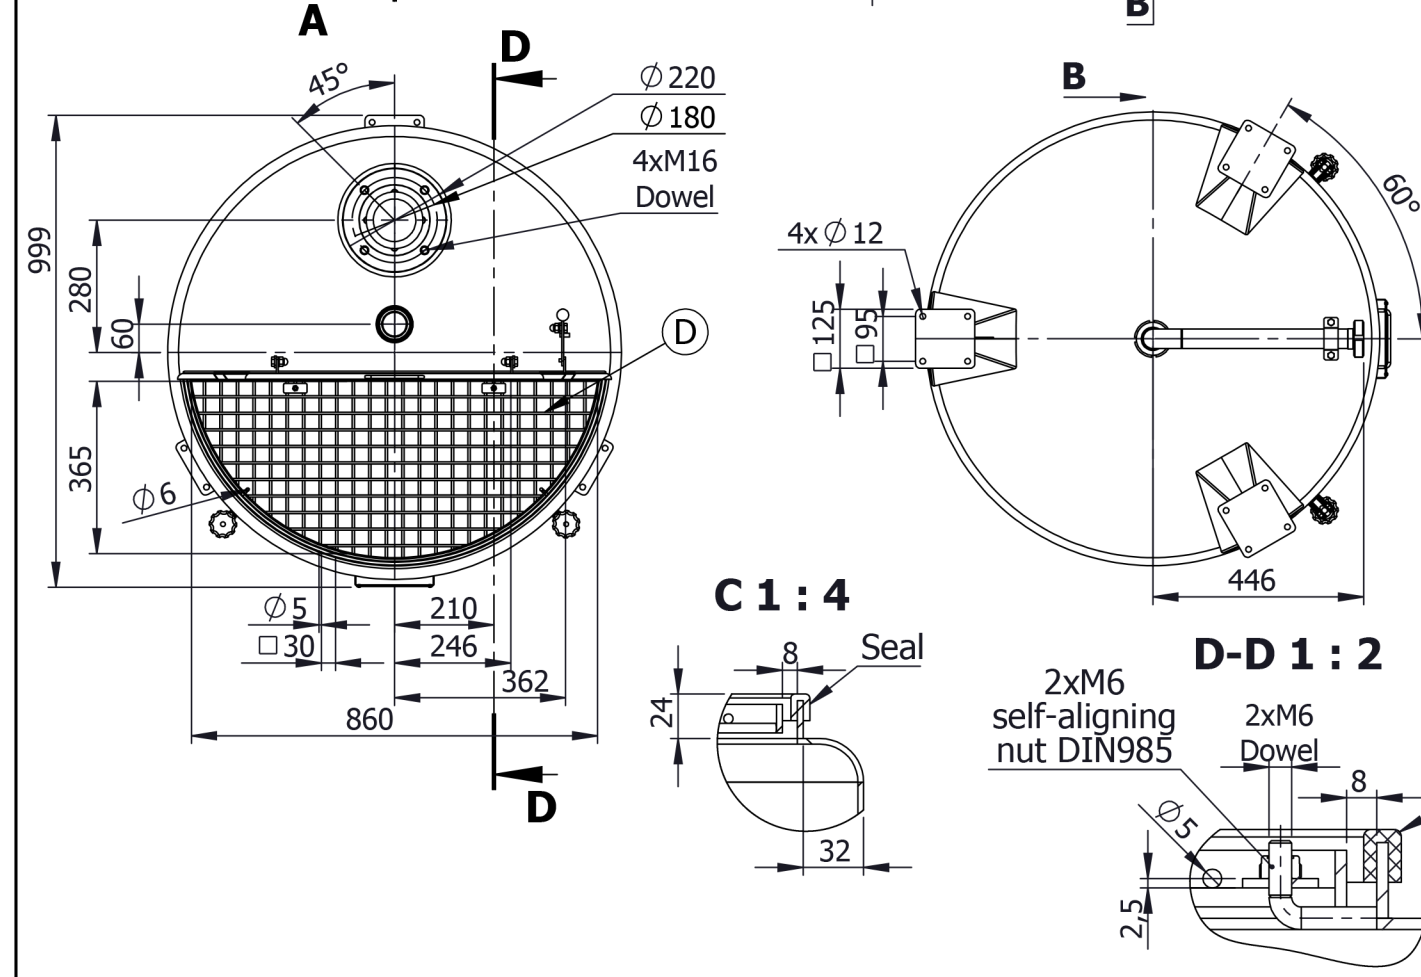


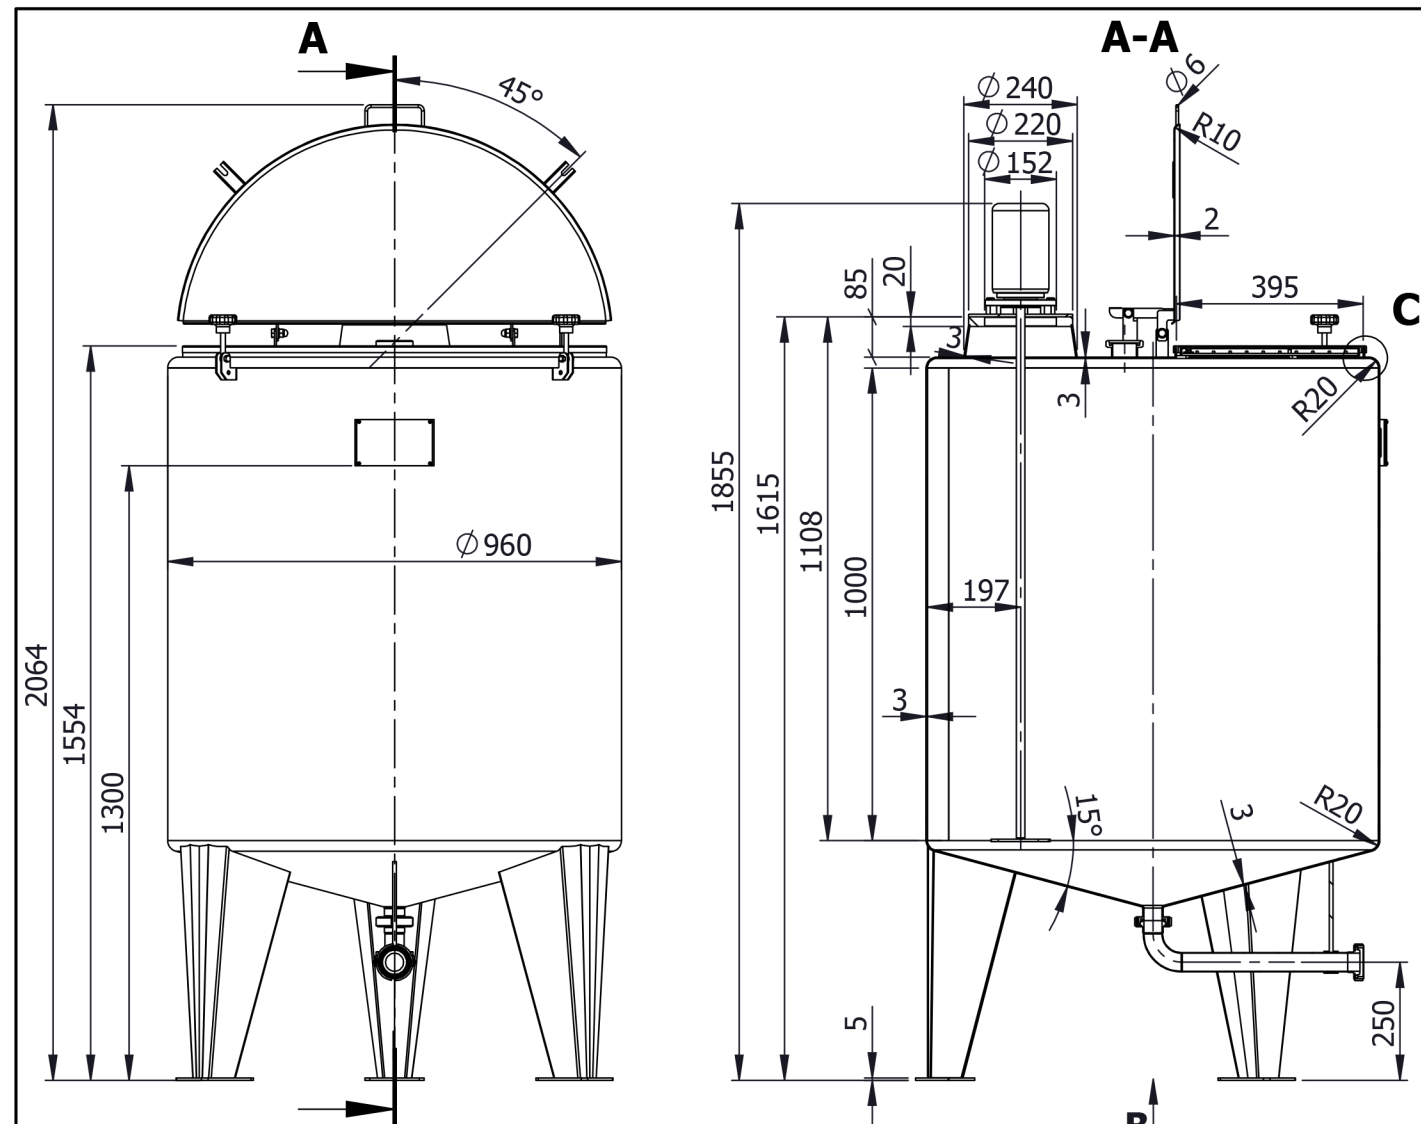

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

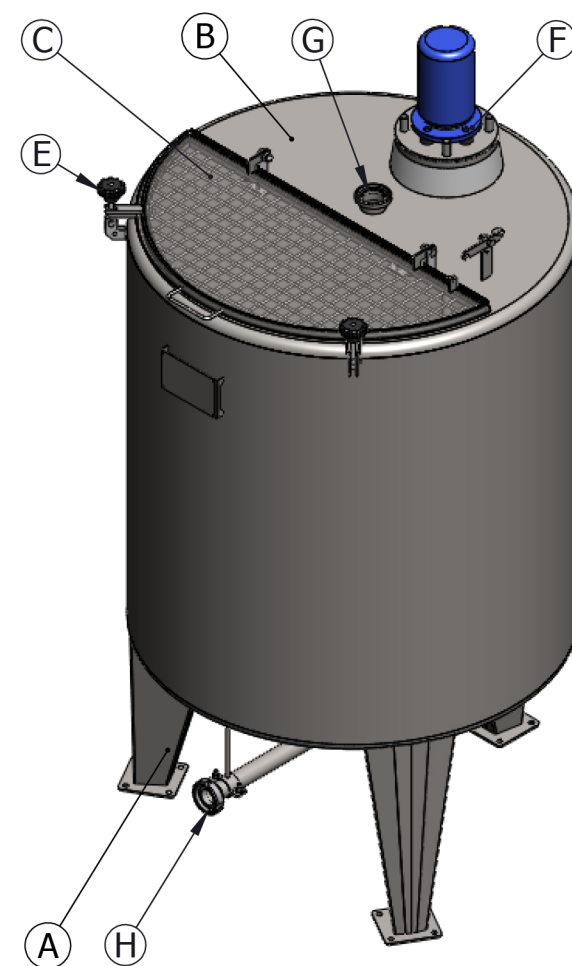

Geometrical volume	750 ℓ	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	135 kg	Material	1.4404 / AISI 316L
Equipment output/voltage	-	Year of manufacture	2018
30			

Item	Description	PN bar	DN mm.	Qty.
A	LEG ON ANCHOR PLATE *anchor bolts are not included	-	-	3
B	1/2 FIXED LID s=3mm	-	-	1
C	1/2 HINGED LID s=2mm	-	-	1
D	SAFETY GRID FOR 1/2 HINGED LID	-	-	1
E	TIGHTNER FOR HINGED LID	-	-	2
F	CONICAL INLET FOR AGITATOR UP TO FLANGE DN150 Ø220 s20 *agitator and mounting of the agitator are not included	atm.	150	1
G	INLET DN50 UP TO WELDING MALE DN50 DIN11851	atm.	50	1
H	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT DN40 DIN11851	atm.	40	1
Straightness, flatness and parallelism - EN 13920 F				
Linear dimensions - EN 13920 B				
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000
1	1.5	3	4.5	6
8	10	12	±1	±2
±3	±4	±6	±8	±10
±12	±16	±20	±25	±30
Surface	Outside	Matt 2B	Weld. seams	Outside
	Inside	Matt 2B		Inside
1.6	✓	✓	✓	✓
Drawn:	K.N.	Scale	1:16	Weight
Checked:	K.I.	750L		
Approved:	D.M.	Rev	30.5.2018 r.	Lang Eng
Sheet 1/1				