
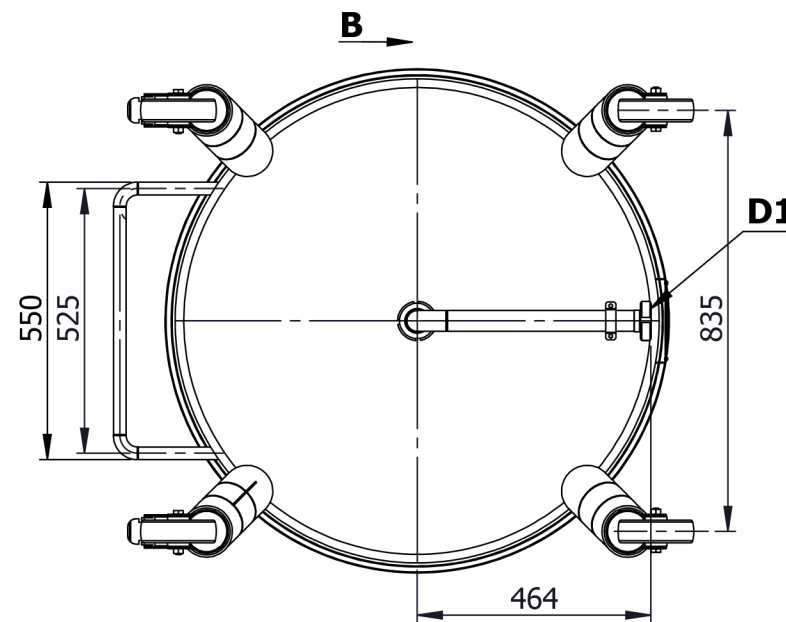
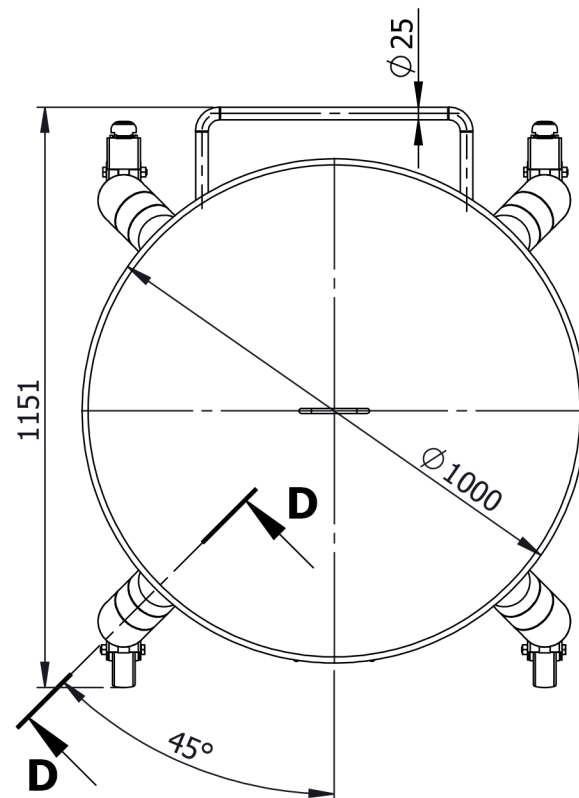
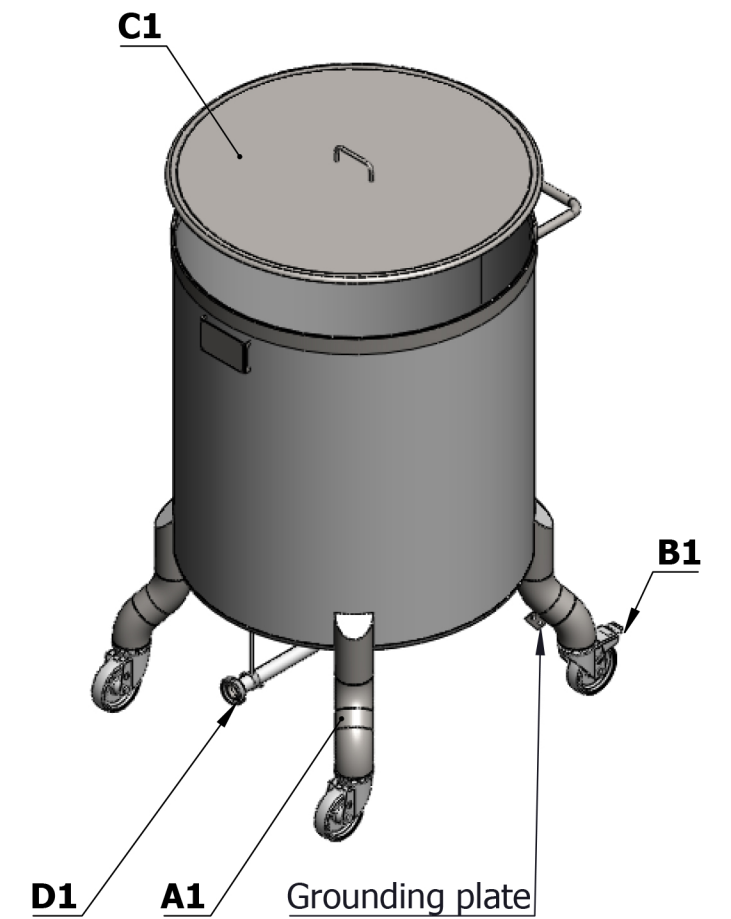
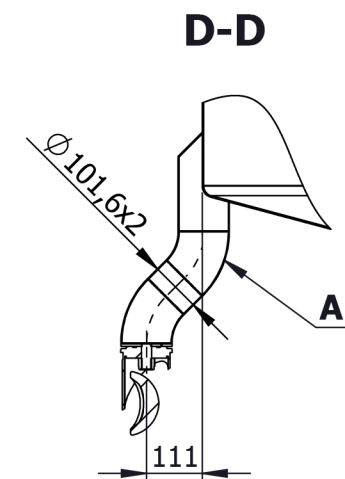
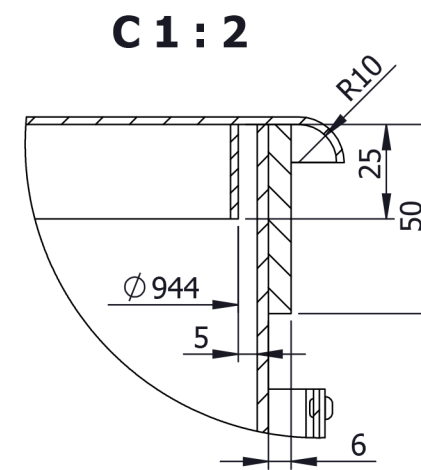
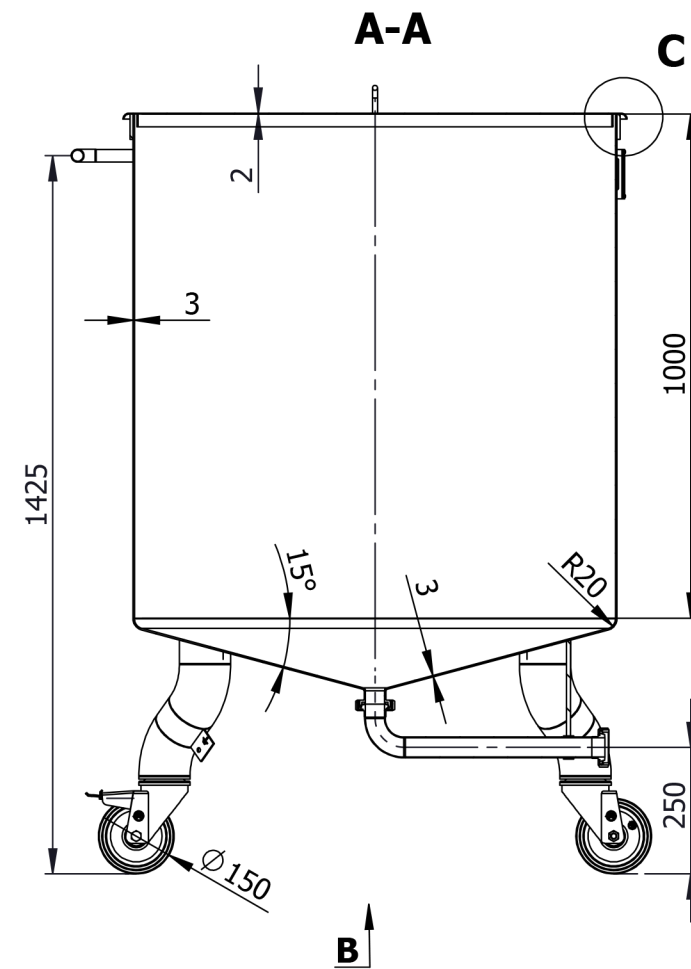


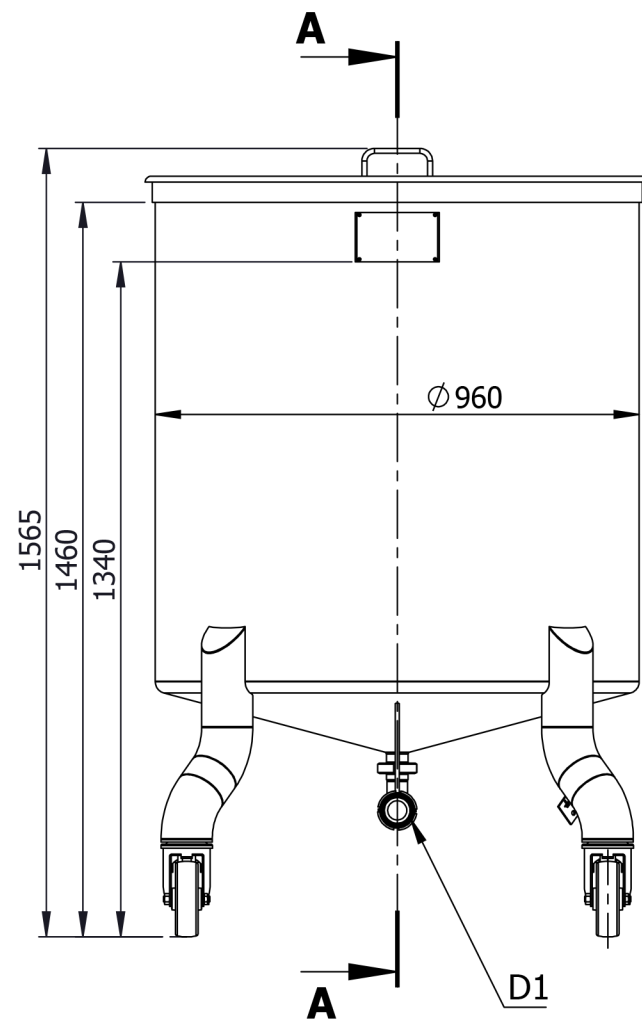

		160	
Geometrical volume	750 l	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	148 kg	Material	AISI 304L / AISI 316L
Equipment output/voltage	-	Year of manufacture	2016

Item	Description	PN	DN	Qty.
		MPa	mm.	
A1	TUBULAR LEG ON WHEEL WITHOUT BREAK - AISI 304L	-	-	2
B1	TUBULAR LEG ON WHEEL WITH BREAK - AISI 304L			2
C1	DUST PROTECTIVE LID AISI 316L	-	-	1
D1	DISMOUNTABLE TOTAL OUTLET UP TO WELDING LINER AND NUT - AISI 316L	atm.	40	1

Surface	Outside	Matt 2B	Welding seam	Outside	Strip grinded 2x20 Ra<1,6
	Inside	Matt 2B		Inside	Flat grinded to Ra<0,8

1.6			min.0,5x45°				Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006			
-----	--	--	-------------	--	--	--	--	--	--	--

	Drawn: K.N.	Scale 1:15	Weight 147.1	AISI 316L AISI 304L			
	Checked: K.I.	0.75m3					
	Approved by: D.M.				20.11.2015 г.	lang eng	Sheet 1/1