
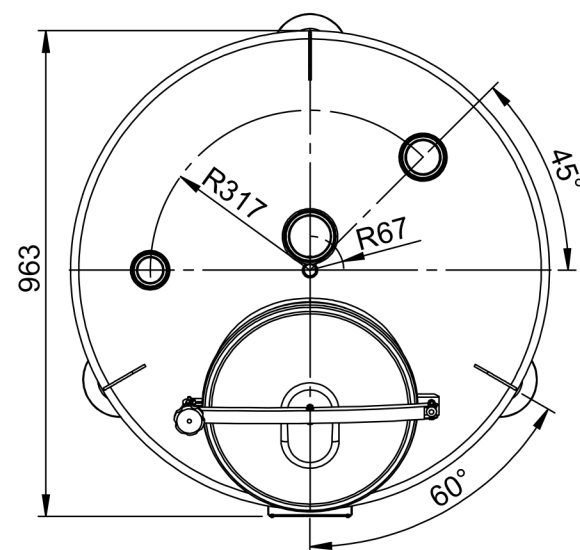
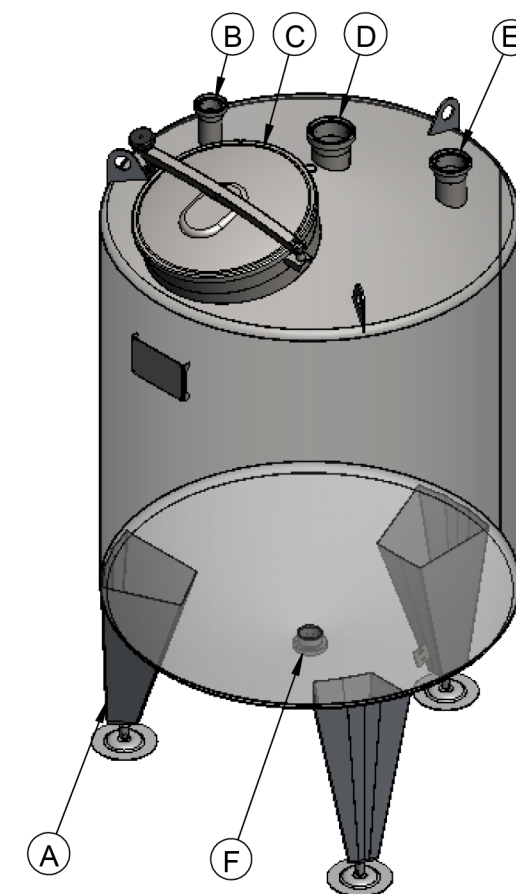
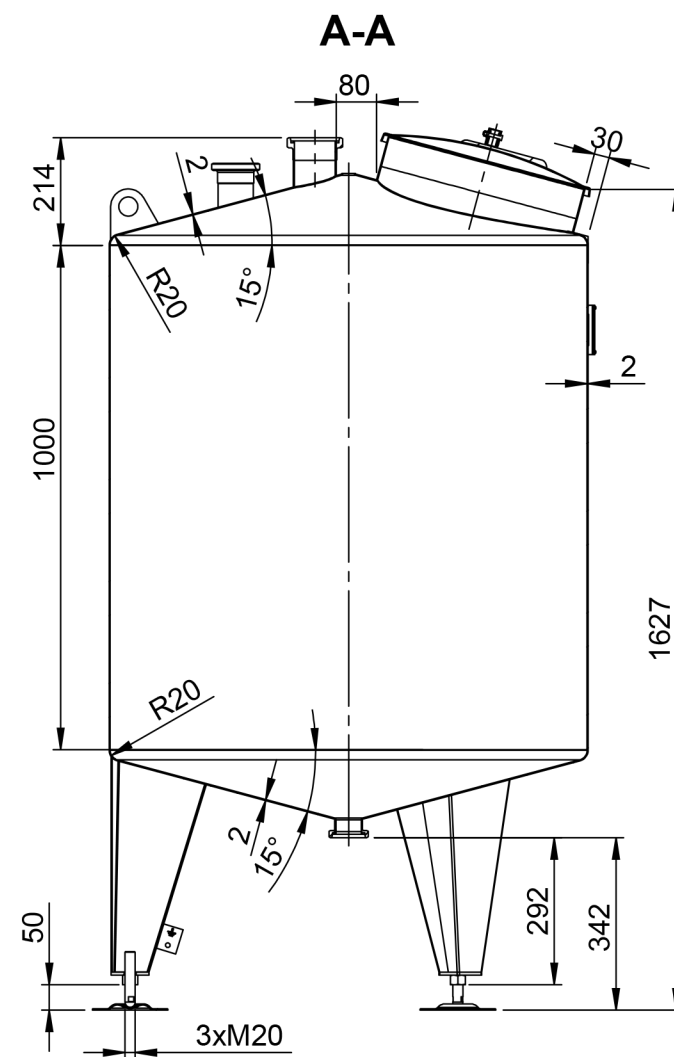


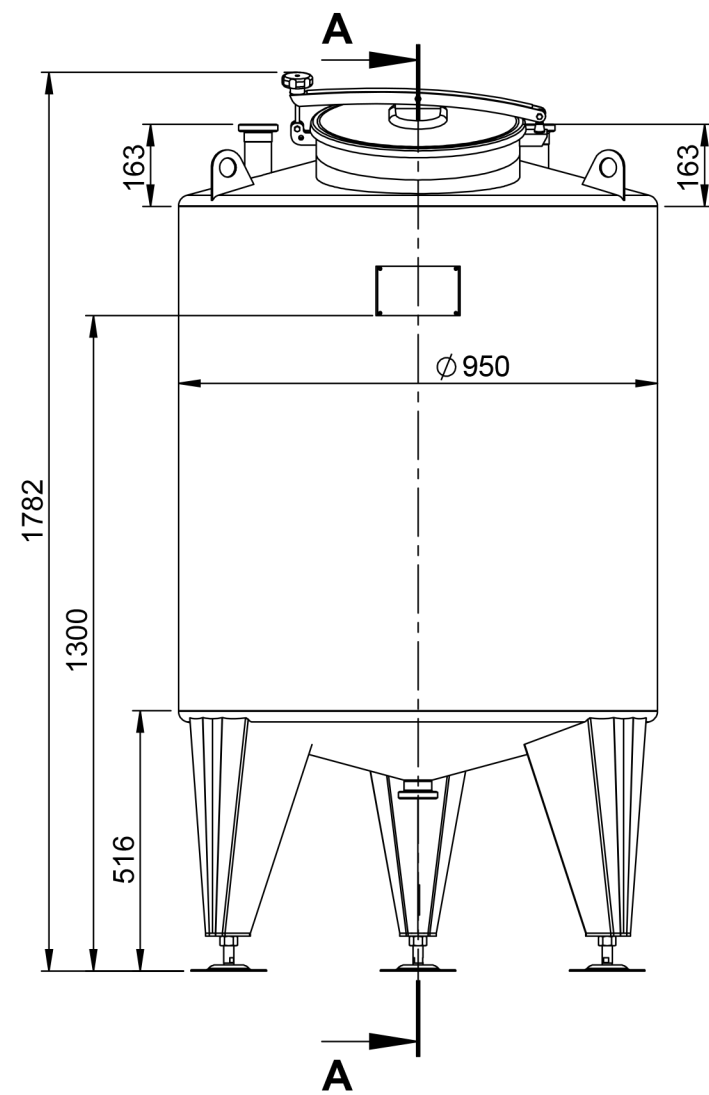

Geometrical volume	780 t	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	97 kg	Material	1.4404/ AISI 316L
Equipment output/voltage	-	Year of manufacture	-

Revisions					
Rev	Description	Date	Drawn	Checked	Rev. DD

Item	Description	PN	DN	Qty.											
		bar	mm.												
A	LEG ON ADJUSTABLE SUPPORT	-	-	3											
B	INLET DN50 ON TANK TOP UP TO WELDING MALE DN50 DIN11851	atm.	50	1											
C	UPPER MANHOLE DN400 Elica art.40/1p-6 WITH EPDM-FDA-GASKET	atm.	400	1											
D	INLET DN80 ON TANK TOP UP TO WELDING MALE DN80 DIN11851	atm.	80	1											
E	INLET AIRVENT DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN11851	atm.	65	1											
F	TOTAL OUTLET DN50 UP TO WELDING MALE DN60 DIN11851	atm.	50	1											
Straightness, flatness and parallelism - EN 13920 F								Linear dimensions - EN 13920 B							
≥30 ≤120	>120 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000	≥2 ≤30	>30 ≤400	>400 ≤1000	>1000 ≤2000	>2000 ≤4000	>4000 ≤8000	>8000 ≤12000	>12000 ≤16000
1	1.5	3	4.5	6	8	10	12	±1	±2	±3	±4	±6	±8	±10	±12
Surface	Outside		Matt 2B				Weld. seams	Outside		Strip grinded 2x20 Ra<1,6					
	Inside		Matt 2B					Inside		Flat grinded to Ra<0,8					
		Drawn: I.N.				Scale 1:15	Weight 97	1.4404/ AISI 316L							
		Checked: K.I.								780L					
		Approved: D.M.						Rev			Lang Eng	Sheet 1/1			