79750 liter tank i Rostfritt 304

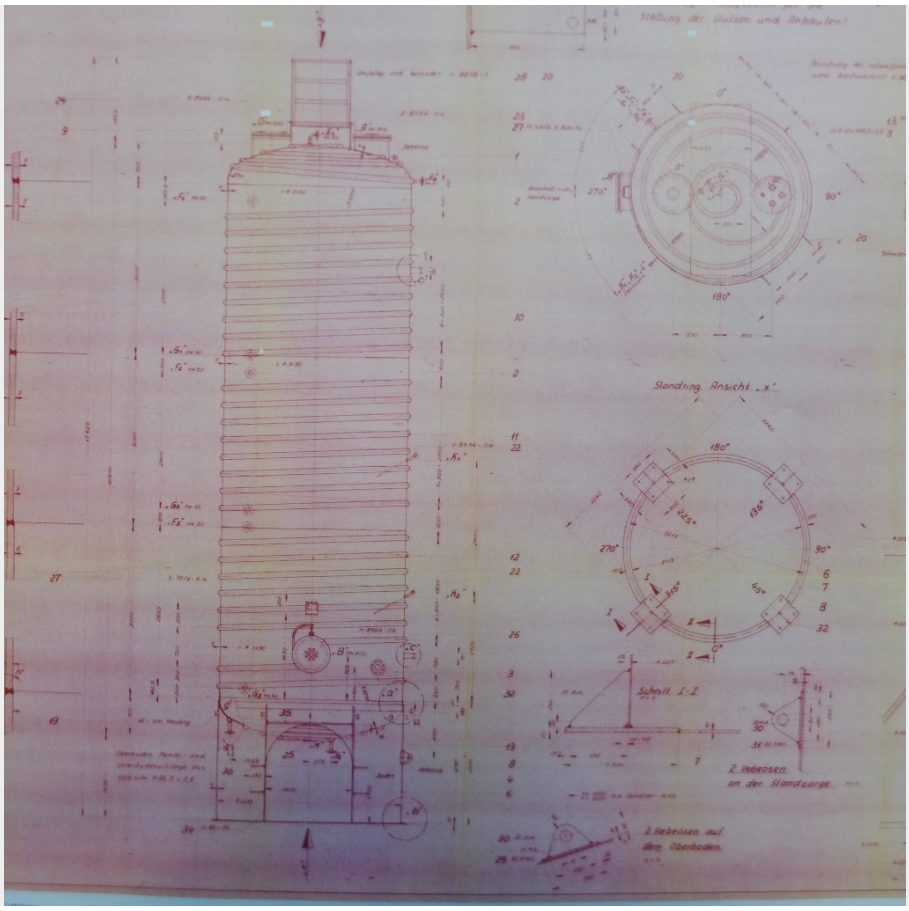

517 000 SEK /st exkl moms

Additional information: Chemistry; Wall thickness lower cylinder area: 6 mm; 1 manhole NW 500 in the lower cylinder area, 1 manhole NW 500 and NW 600 in the upper bottom; Stand frame, Fe
Volumetric volume (L): 79.750 L
Pressure in tank: pressure
Max. pressure (Bar): 0,50 Bar

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Max. temperature (°C): 200 °C

Material wet parts: SS AISI 304 (V2A)
Model: vertical
Configuration: insulated with heat-exchanger
Heat exchanger: yes
Insulation: yes

Mobile tank: no
Total discharge: yes
Volume: 801 L
Max Overpressure: 6 Bar
Max. working temperature: 300 °C

Type HE on the bottom: half pipe welded onto the outside of the innertank
Type HE on the cylinder: half pipe welded onto the outside of the innertank
Documents included: no
Technical drawing included: no
Registration plate on the tank: yes

Flange for agitator: no
Outlet of tank: available
Top: 6 mm
Cylinder: 5 mm
Bottom: 8 mm

Internal diameter tank: 3.190 mm
Cylinder height: 9.000 mm
Total height of tank: 13.500 mm

SKU: 416894

Mer information

Beskrivning av produkt

Material: Rostfritt 304
Modell: Vertikal
Nytillverkad/Begagnad: Begagnad
Arbetstryck i tank: pressure
Konfiguration: insulated with heat-exchanger
Max. arbetstemperatur: 200 °C
Mobil tank: Nej
Övrig information: Chemistry; Wall thickness lower cylinder area: 6 mm; 1 manhole NW 500 in the lower cylinder area, 1 manhole NW 500 and NW 600 in the upper bottom; Stand frame, Fe; we can’t give any guarantees about
Övrig information2: the heating/cooling jacket
Omrörare: Nej
Övertryck: 0,50 Bar
Total urtappning: Yes
Trycktank: Ja
Uppvärmning/kylning: Ja
Vätskeberörd yta: SS AISI 304 (V2A)
Volym i liter: 79750

Utrustning

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Ja
Teknisk ritning finns: Nej

Översikt material

Material: Rostfritt 304

Dimensioner av tank

Cylinderhöjd: 9.000 mm
Invändig diameter: 3.190 mm
Total höjd: 13.500 mm

Tjocklek på tank
Botten: 8 mm
Cylinder: 5 mm
Topp: 6 mm

Mer
Isolerad: Ja