500 liter tank i Syrafast 316

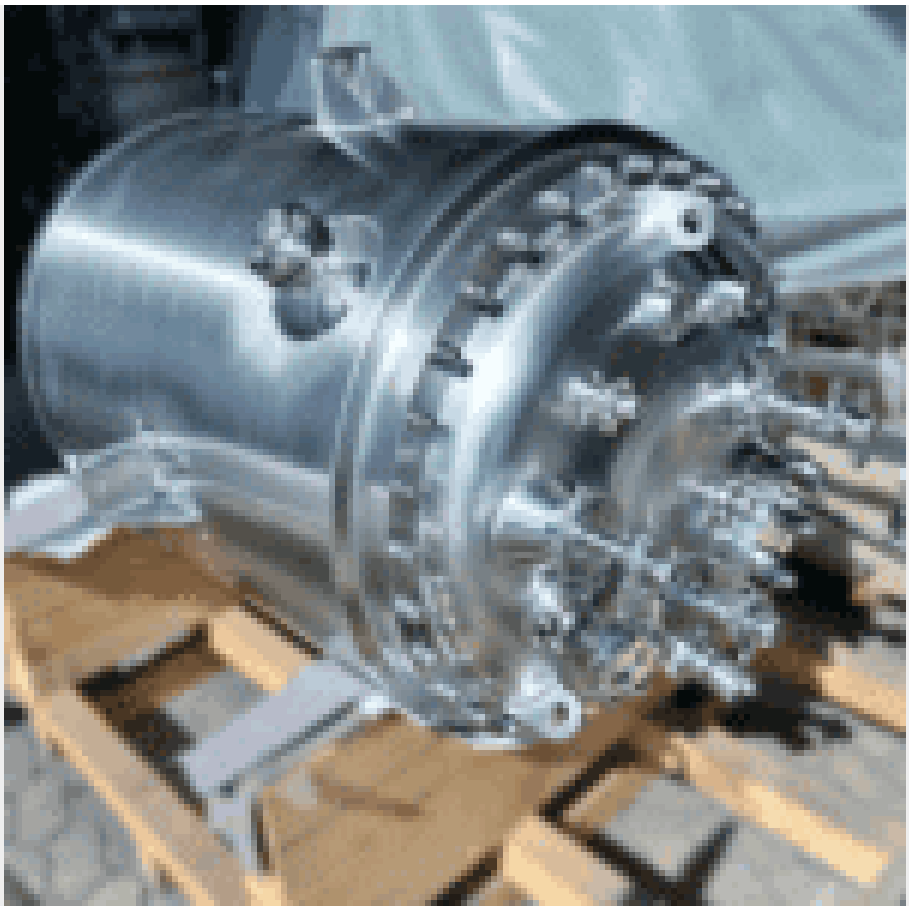

345 000 SEK /st exkl moms

Additional information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass diameter: 285mm
Volumetric volume (L): 500 L
Pressure in tank: pressure and vacuum

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se

Max. pressure (Bar): 6 Bar
Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C
Material wet parts: SS AISI 316 (V4A)
Model: vertical
Configuration: insulated with heat-exchanger
Heat exchanger: yes

Insulation: yes
Mobile tank: no
Total discharge: yes
Volume: 88 L
Max Overpressure: 10 Bar

Max onderdruk: 1 Bar
Max. working temperature: 150 °C
Type HE on the cylinder: half pipe welded onto the outside of the innertank
Documents included: no
Technical drawing included: no

Registration plate on the tank: yes
Flange for agitator: no
Outlet of tank: available
Agitator: yes
Number of revolutions: 408

Power: 0,37
Top: 4,30 mm
Cylinder: 8,90 mm
Bottom: 6,10 mm
Internal diameter tank: 780 mm

Outer diameter tank: 960 mm
Cylinder height: 1.015 mm
Empty weight tank: 1.000

SKU: 441269

Mer information

Beskrivning av produkt

Material: Syrafast 316
Modell: Vertikal
Nytillverkad/Begagnad: Begagnad
Arbetstryck i tank: pressure and vacuum
Konfiguration: insulated with heat-exchanger
Max. arbetstemperatur: 150 °C
Mobil tank: Nej
Övrig information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass
Övrig information2: diameter: 285mm; we can't give any guarantees about the heating/cooling jacket; we can't give any guarantees about the agitator
Omrörare: Ja
Övertryck: 6 Bar
Total urtappning: Ja
Undertryck (vakuum): 1 Bar
Trycktank: Ja
Uppvärmning/kylning: Ja
Vätskeberörd yta: SS AISI 316 (V4A)
Volym i liter: 500

Utrustning

Dokument finns: Nej
Fläns för omrörare: Nej
Märkskylt: Ja
Teknisk ritning finns: Nej

Översikt material
Material: Syrafast 316

Dimensioner av tank
Cylinderhöjd: 1.015 mm
Invändig diameter: 780 mm
Ytterdiameter: 960 mm

Omrörare
Kraft (kW): 0,37
Varvtal: 408

Tjocklek på tank
Botten: 6,10 mm
Cylinder: 8,90 mm
Topp: 4,30 mm

Mer
Isolerad: Ja
Vikt: 1.000

PROCESSÖVERSKOTT AB

Rodervägen 57
891 78 Bonässund
info@processoverskott.se