


## 500 liter tank i Syrafast 316

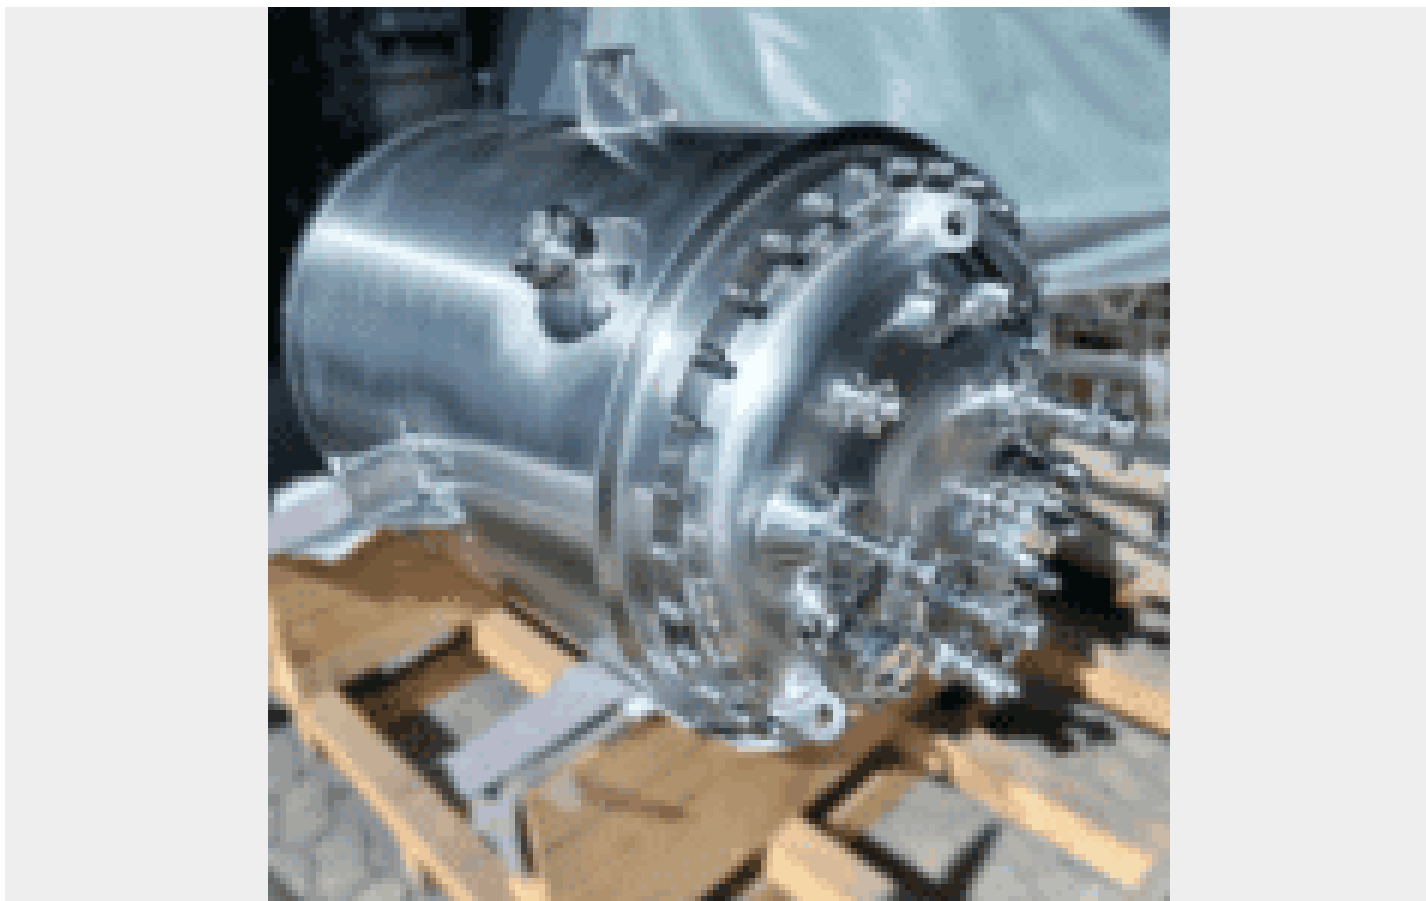

**339 000 SEK /st exkl moms**

**Additional information:** Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass diameter: 285mm

**Volumetric volume (L):** 500 L

**Pressure in tank:** pressure and vacuum

**Max. pressure (Bar):** 6 Bar

**Min. pressure (Bar):** 1 Bar

**Max. temperature (°C):** 150 °C

**Material wet parts:** SS AISI 316 (V4A)

**Model:** vertical

**Configuration:** insulated with heat-exchanger

**Heat exchanger:** yes

**Insulation:** yes

**Mobile tank:** no

**Total discharge:** yes

**Volume:** 88 L

**Max Overpressure:** 10 Bar

**Max onderdruk:** 1 Bar

**Max. working temperature:** 150 °C

**Type HE on the cylinder:** half pipe welded onto the outside of the innertank

**Documents included:** no

**Technical drawing included:** no

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Outlet of tank:** available

**Agitator:** yes

**Number of revolutions:** 408

**Power:** 0,37

**Top:** 4,30 mm

**Cylinder:** 8,90 mm

**Bottom:** 6,10 mm

**Internal diameter tank:** 780 mm

**Outer diameter tank:** 960 mm

**Cylinder height:** 1.015 mm

**Empty weight tank:** 1.000

**SKU:** 441269

## Mer information

### Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: pressure and vacuum

Konfiguration: insulated with heat-exchanger

Max. arbetstemperatur: 150 °C

Mobil tank: Nej

Övrig information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass

Övrig information2: diameter: 285mm; we can't give any guarantees about the heating/cooling jacket; we can't give any guarantees about the agitator

Omrörare: Ja

Övertryck: 6 Bar

Total urtappning: Ja

Undertryck (vakuum): 1 Bar

Trycktank: Ja

Uppvärmning/kylning: Ja

Vätskeberörd yta: SS AISI 316 (V4A)

Volym i liter: 500

### Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej



## Översikt material

Material: Syrafast 316

## Dimensioner av tank

Cylinderhöjd: 1.015 mm

Invändig diameter: 780 mm

Ytterdiameter: 960 mm

## Omrörare

Kraft (kW): 0,37

Varvtal: 408

## Tjocklek på tank

Botten: 6,10 mm

Cylinder: 8,90 mm

Topp: 4,30 mm

## Mer

Isolerad: Ja

Vikt: 1.000