


500 liter tank i Syrafast 316

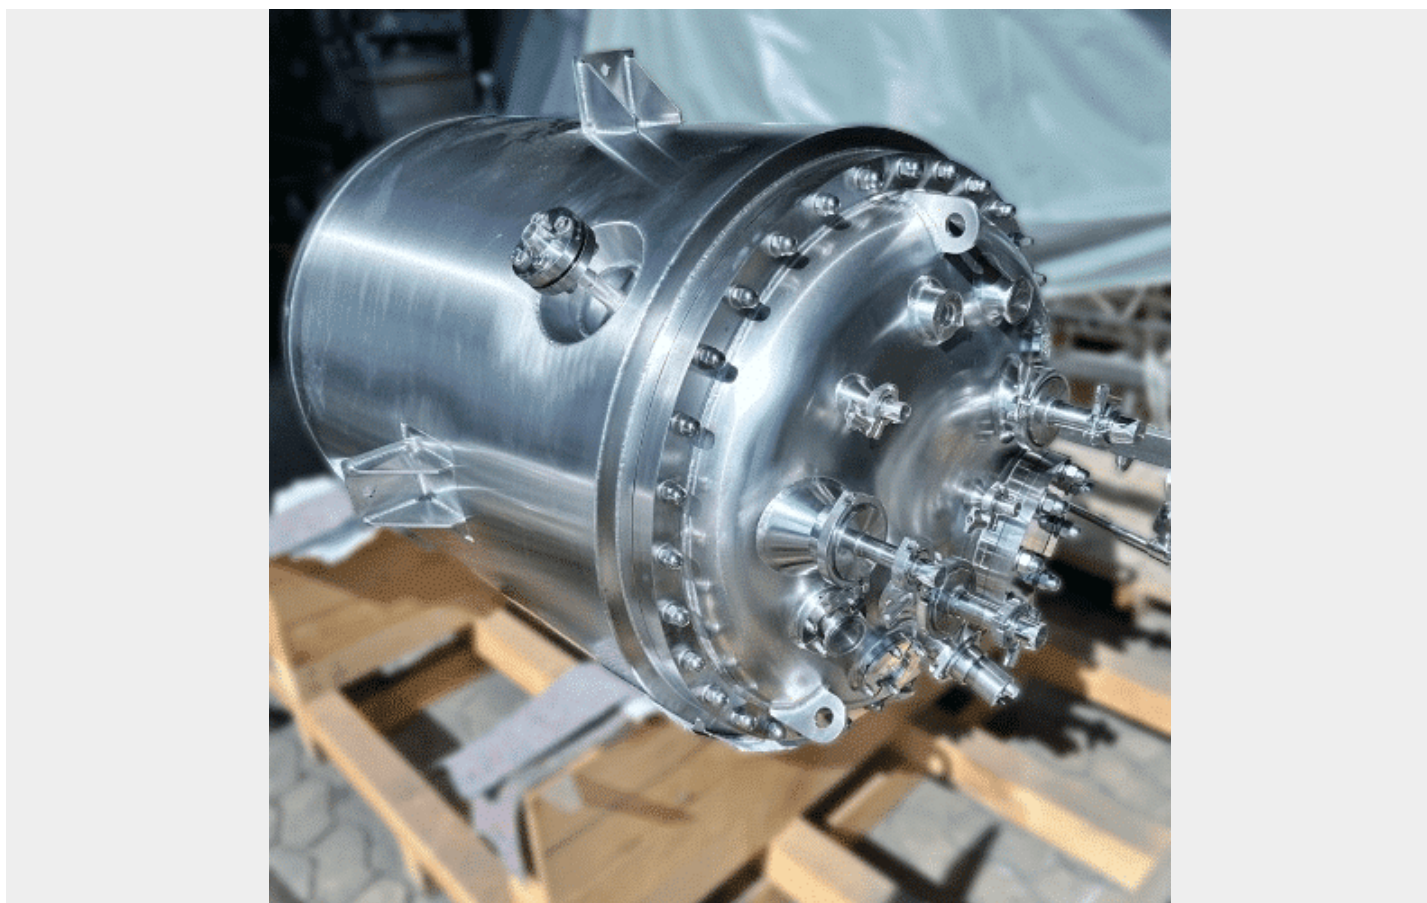

345,000,00 kr /st exkl moms

Additional information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass diameter: 285mm

Volumetric volume (L): 500 L

Pressure in tank: pressure and vacuum

Max. pressure (Bar): 6 Bar

Min. pressure (Bar): 1 Bar

Max. temperature (°C): 150 °C

Material wet parts: SS AISI 316 (V4A)

Model: vertical

Configuration: insulated with heat-exchanger

Heat exchanger: yes

Insulation: yes

Mobile tank: no

Total discharge: yes

Volume: 88 L

Max Overpressure: 10 Bar

Max onderdruk: 1 Bar

Max. working temperature: 150 °C

Type HE on the cylinder: half pipe welded onto the outside of the innertank

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Outlet of tank: available

Agitator: yes

Number of revolutions: 408

Power: 0,37

Top: 4,30 mm

Cylinder: 8,90 mm

Bottom: 6,10 mm

Internal diameter tank: 780 mm

Outer diameter tank: 960 mm

Cylinder height: 1.015 mm

Empty weight tank: 1.000

SKU: 441269

Mer information

Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: pressure and vacuum

Konfiguration: insulated with heat-exchanger

Max. arbetstemperatur: 150 °C

Mobil tank: Nej

Övrig information: Full set of pharma-compliant technical documentation included in delivery; tank was manufactured for a global pharmaceutical company but was never put into operation; hand hole with sight glass

Övrig information2: diameter: 285mm; we can't give any guarantees about the heating/cooling jacket; we can't give any guarantees about the agitator

Omrörare: Ja

Övertryck: 6 Bar

Total urtappning: Ja

Undertryck (vakuum): 1 Bar

Trycktank: Ja

Uppvärmning/kylning: Ja

Vätskeberörd yta: SS AISI 316 (V4A)

Volym i liter: 500

Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej



Översikt material

Material: Syrafast 316

Dimensioner av tank

Cylinderhöjd: 1.015 mm

Invändig diameter: 780 mm

Ytterdiameter: 960 mm

Omrörare

Kraft (kW): 0,37

Varvtal: 408

Tjocklek på tank

Botten: 6,10 mm

Cylinder: 8,90 mm

Topp: 4,30 mm

Mer

Isolerad: Ja

Vikt: 1.000