


3300 liter tank i Rostfritt 304

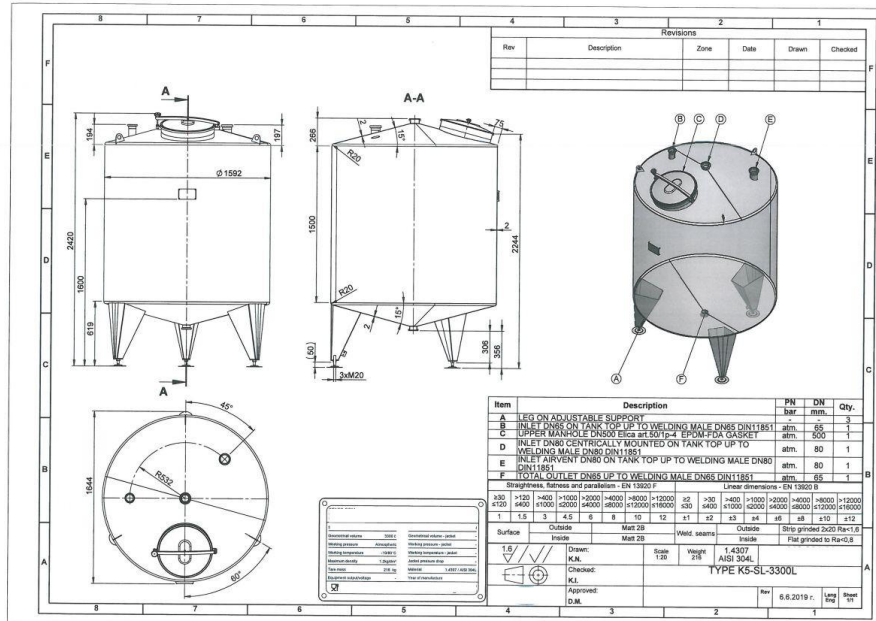

86,000,00 kr /st exkl moms

item available on order

Article type: brand new storage tank - type K5-SL

Additional information: Ra=<0.8µm

Capacity: 3.300 L

Maximal density of the product: 1.350

Ra inner weld: 0,80

Finish stainless steel: 2B

Working pressure in tank: ATM - atmosferic

Max. working temperature: 100 °C

Min. working temperature: -10 °C

Material wet parts: SS AISI 304L (V2A)

Model: vertical

Configuration: single-skin

Heat exchanger: no

Insulation: no

Mobile tank: no

Top type: conical 15 °

Shape of tank: cylindrical

Bottom type: conical

Total discharge: yes

Fixation points: 3 adjustable feet

Manway(s): RVS 304L

Gasket manway(s): EPDM

Fixation point(s): RVS 304L

Suitable for food industry: yes

Documents included: yes, optional

Technical drawing included: yes

Registration plate on the tank: yes

with inspection of: TUV

Flange for agitator: no

Number of manways: 1

Position manway: at the top

Manway 1: 500 mm

Tank outlet: inside Ø 65 mm

Outlet type: DIN11851 male

Top: 2 mm

Cylinder: 2 mm

Bottom: 2 mm

Distance from outlet to ground: 306 mm

Outer diameter tank: 1.592 mm

Cylinder height: 1.500 mm

Height of top: 266 mm

Feet height: 619 mm

Total height of tank: 2.430 mm

Empty weight tank: 216

SKU: 15459

Mer information

Beskrivning av produkt

Livsmedelsklassad: Ja

Material: Rostfritt 304

Modell: Vertikal

Nyttillverkad/Begagnad: Nyttillverkad

Konfiguration: single-skin

Omrörare: Nej

Volym i liter: 3300

Utrustning

Märkskylt: Ja

Livsmedelsklassad: Ja

Tankutlopp: inside Ø 65 mm

Utloppstyp: DIN11851 male

Översikt material

Material: Rostfritt 304

Dimensioner av tank

Cylinderhöjd: 1.500 mm

Ytterdiameter: 1.592 mm

Tjocklek på tank

Botten: 2 mm

Cylinder: 2 mm

Topp: 2 mm