
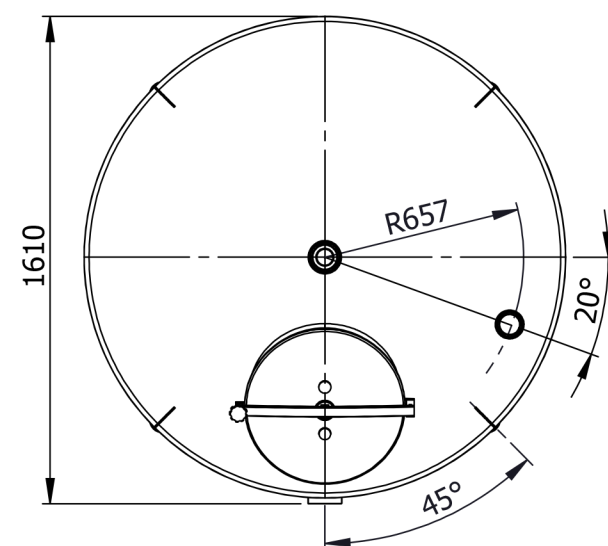
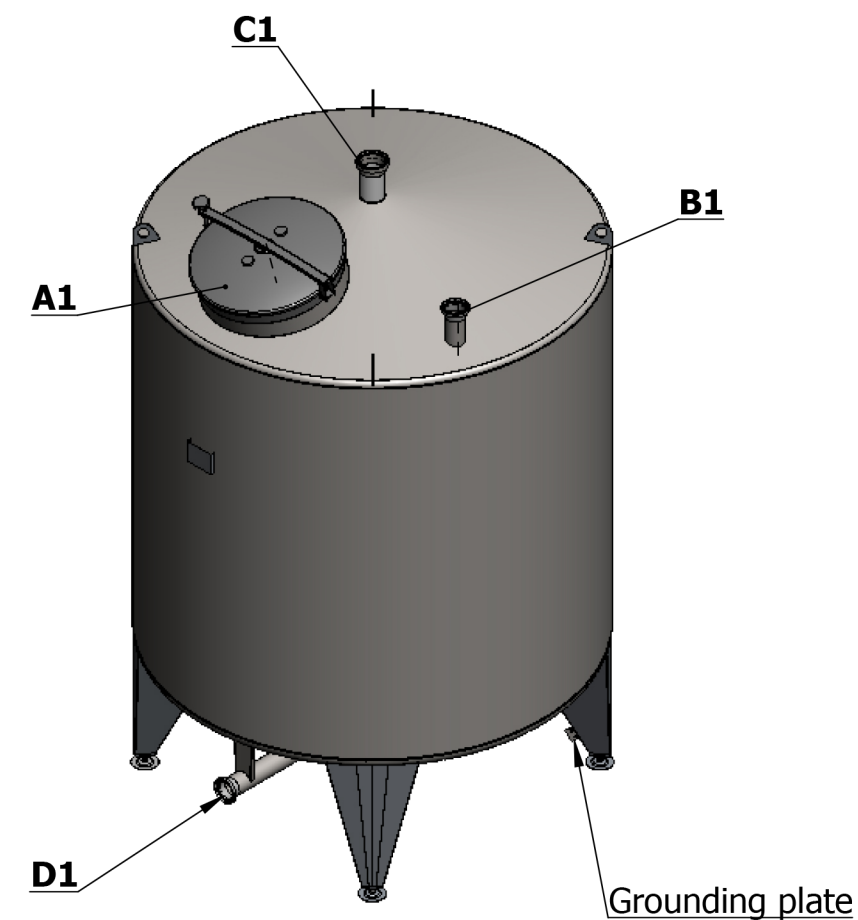
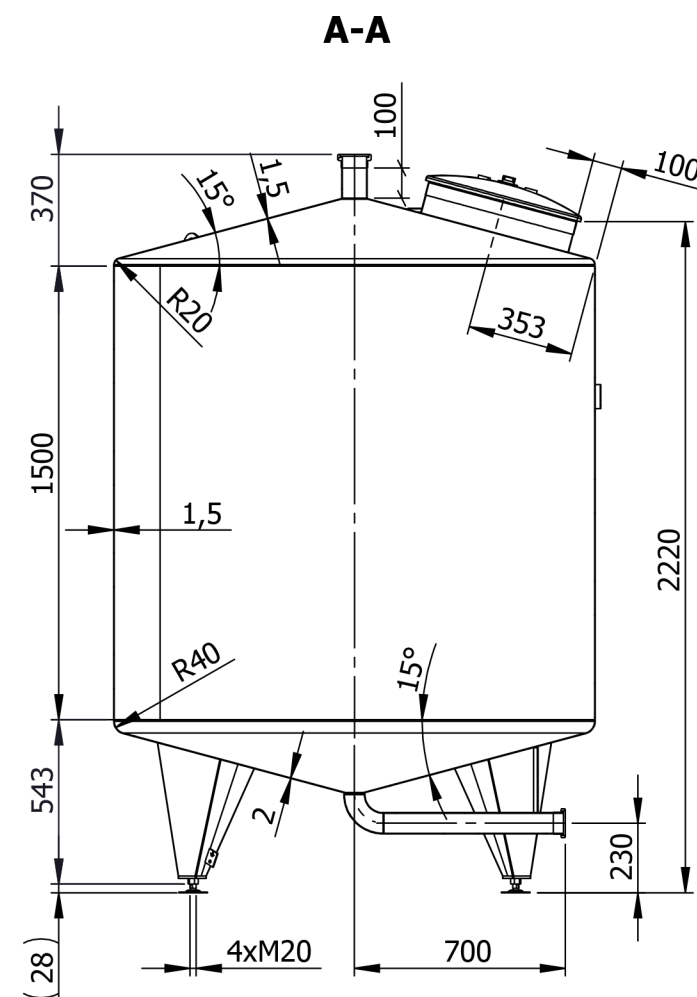


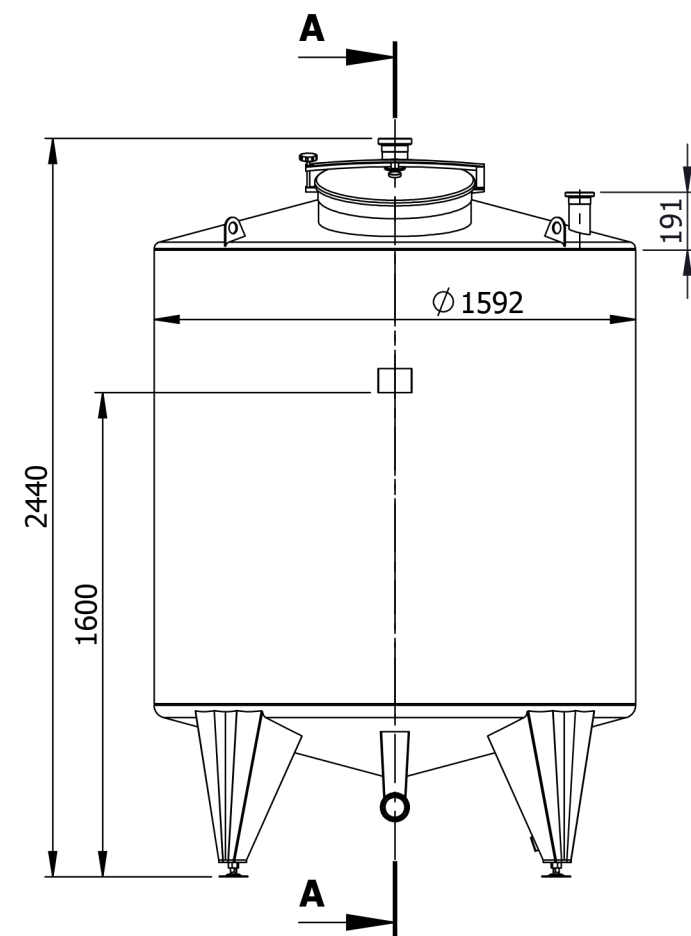

VERTICAL TANK TYPE K3			
Geometrical volume	3300 t	Geometrical volume - jacket	-
Working pressure	Atmospheric	Working pressure - jacket	-
Working temperature	-10/80°C	Working temperature - jacket	-
Maximum density	1.2kg/dm³	Jacket pressure drop	-
Tare mass	190 kg	Material	AISI 304L / AISI 316L
Equipment output/voltage	-	Year of manufacture	2016

Item	Description	PN	DN	Qty.
		bar	mm.	
A1	UPPER MANWAY	atm.	500	1
B1	INLET UP TO WELDING MALE DIN 11851	atm.	65	1
C1	INLET UP TO WELDING MALE DIN 11851	atm.	80	1
D1	OUTLET UP TO WELDING MALE DIN 11851	atm.	65	1

Surface	Outside	Matt 2B	Welding seam	Outside	Strip grinded 2x20 Ra<1,6
	Inside	Matt 2B		Inside	Strip grinded 2x20 Ra<1,6

	 min.0,5x45°	Not-indicated tolerances of dimensions of length and angles, shapes and positions are according to EN ISO 13920:2006		
---	---	--	--	--

	Drawn: K.N.	Scale 1:25	Weight 190.3	AISI 316L AISI 304L
---	-----------------------	---------------	-----------------	------------------------

 Manufacturing 3 Network Partner	Checket: K.I.	VERTICAL TANK TYPE K3		
--	-------------------------	-----------------------	--	--

 Manufacturing 3 Network Partner	Approved by: D.M.		Rev.	8.3.2016 г.	lang eng	Sheet 1/1