

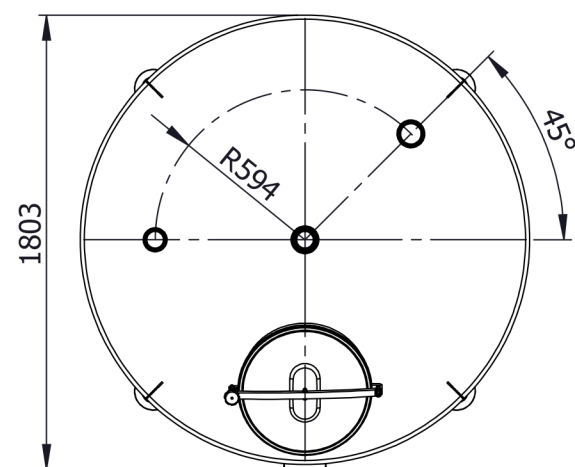
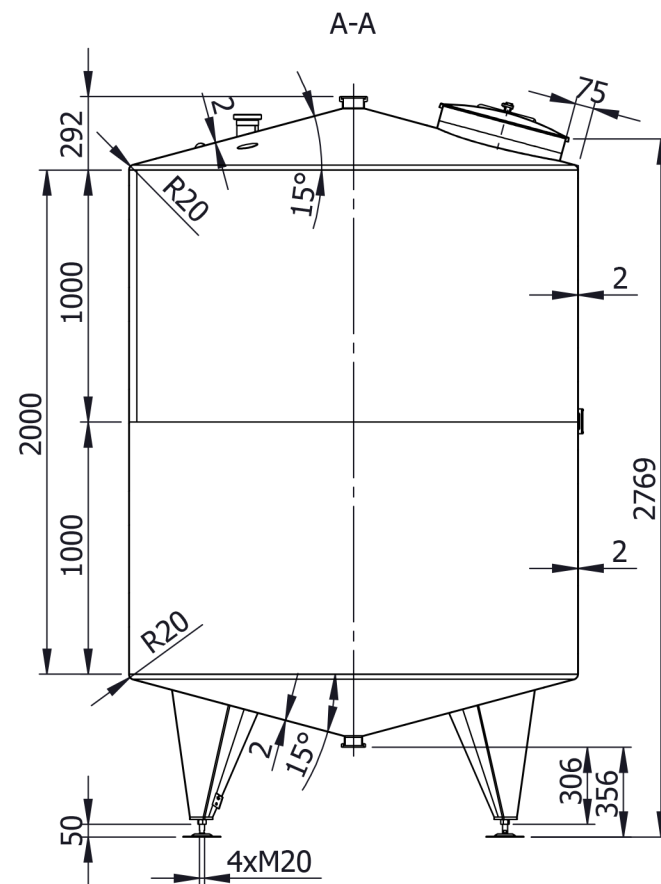


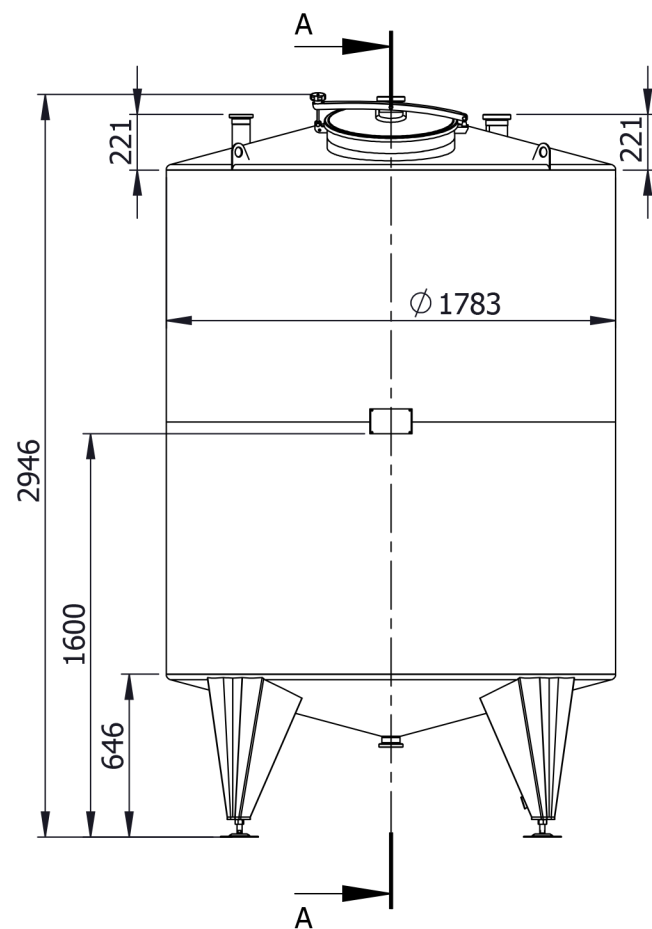

|                          |  |             |                              |  |                  |
|--------------------------|--|-------------|------------------------------|--|------------------|
| Geometrical volume       |  | 5400 l      | Geometrical volume - jacket  |  | -                |
| Working pressure         |  | Atmospheric | Working pressure - jacket    |  | -                |
| Working temperature      |  | -10/80°C    | Working temperature - jacket |  | -                |
| Maximum density          |  | 1.2kg/dm³   | Jacket pressure drop         |  | -                |
| Tare mass                |  | 312 kg      | Material                     |  | 1.4404/AISI 316L |
| Equipment output/voltage |  | -           | Year of manufacture          |  | -                |

| Revisions |             |      |       |         |         |
|-----------|-------------|------|-------|---------|---------|
| Rev       | Description | Date | Drawn | Checked | Rev. DD |
|           |             |      |       |         |         |
|           |             |      |       |         |         |
|           |             |      |       |         |         |

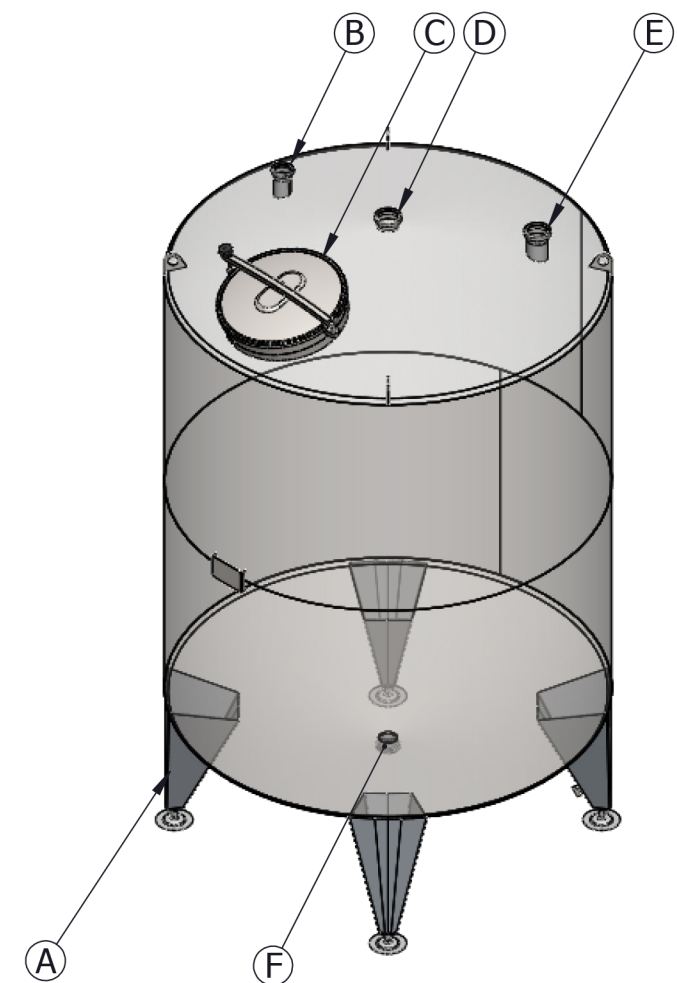

| Item | Description                                                                  | PN bar | DN mm. | Qty. |
|------|------------------------------------------------------------------------------|--------|--------|------|
| A    | LEG ON ADJUSTABLE SUPPORT                                                    | -      | -      | 4    |
| B    | INLET DN65 ON TANK TOP UP TO WELDING MALE DN65 DIN 11851                     | atm.   | 65     | 1    |
| C    | UPPER MANHOLE DN500 Elica art. 50/1p-6 WITH EPDM-FDA-GASKET                  | atm.   | 500    | 1    |
| D    | INLET DN80 CENTRICALLY MOUNTED ON TANK TOP UP TO WELDING MALE DN80 DIN 11851 | atm.   | 80     | 1    |
| E    | INLET AIR VENT DN80 ON TANK TOP UP TO WELDING MALE DN80 DIN 11851            | atm.   | 80     | 1    |
| F    | TOTAL OUTLET DN65 UP TO WELDING MALE DN65 DIN 11851                          | atm.   | 65     | 1    |

| Straightness, flatness and parallelism - EN 13920 F |              |               |                |                |                |                 |                  | Linear dimensions - EN 13920 B |             |               |                |                |                |                 |                  |
|-----------------------------------------------------|--------------|---------------|----------------|----------------|----------------|-----------------|------------------|--------------------------------|-------------|---------------|----------------|----------------|----------------|-----------------|------------------|
| ≥30<br>≤120                                         | >120<br>≤400 | >400<br>≤1000 | >1000<br>≤2000 | >2000<br>≤4000 | >4000<br>≤8000 | >8000<br>≤12000 | >12000<br>≤16000 | ≥2<br>≤30                      | >30<br>≤400 | >400<br>≤1000 | >1000<br>≤2000 | >2000<br>≤4000 | >4000<br>≤8000 | >8000<br>≤12000 | >12000<br>≤16000 |
| 1                                                   | 1.5          | 3             | 4.5            | 6              | 8              | 10              | 12               | ±1                             | ±2          | ±3            | ±4             | ±6             | ±8             | ±10             | ±12              |

| Surface | Outside | Matt 2B | Weld. seams | Outside | Strip grinded 2x20 Ra<1,6 |
|---------|---------|---------|-------------|---------|---------------------------|
|         | Inside  | Matt 2B |             | Inside  | Strip grinded 2x20 Ra<1,6 |

|     |                |            |            |                  |  |
|-----|----------------|------------|------------|------------------|--|
| 1.6 | Drawn: K.N.    | Scale 1:30 | Weight 312 | 1.4404/AISI 316L |  |
|     | Checked: K.I.  |            |            |                  |  |
|     | Approved: D.M. |            |            |                  |  |

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |