


## 1495 liter tank i Syrafast 316

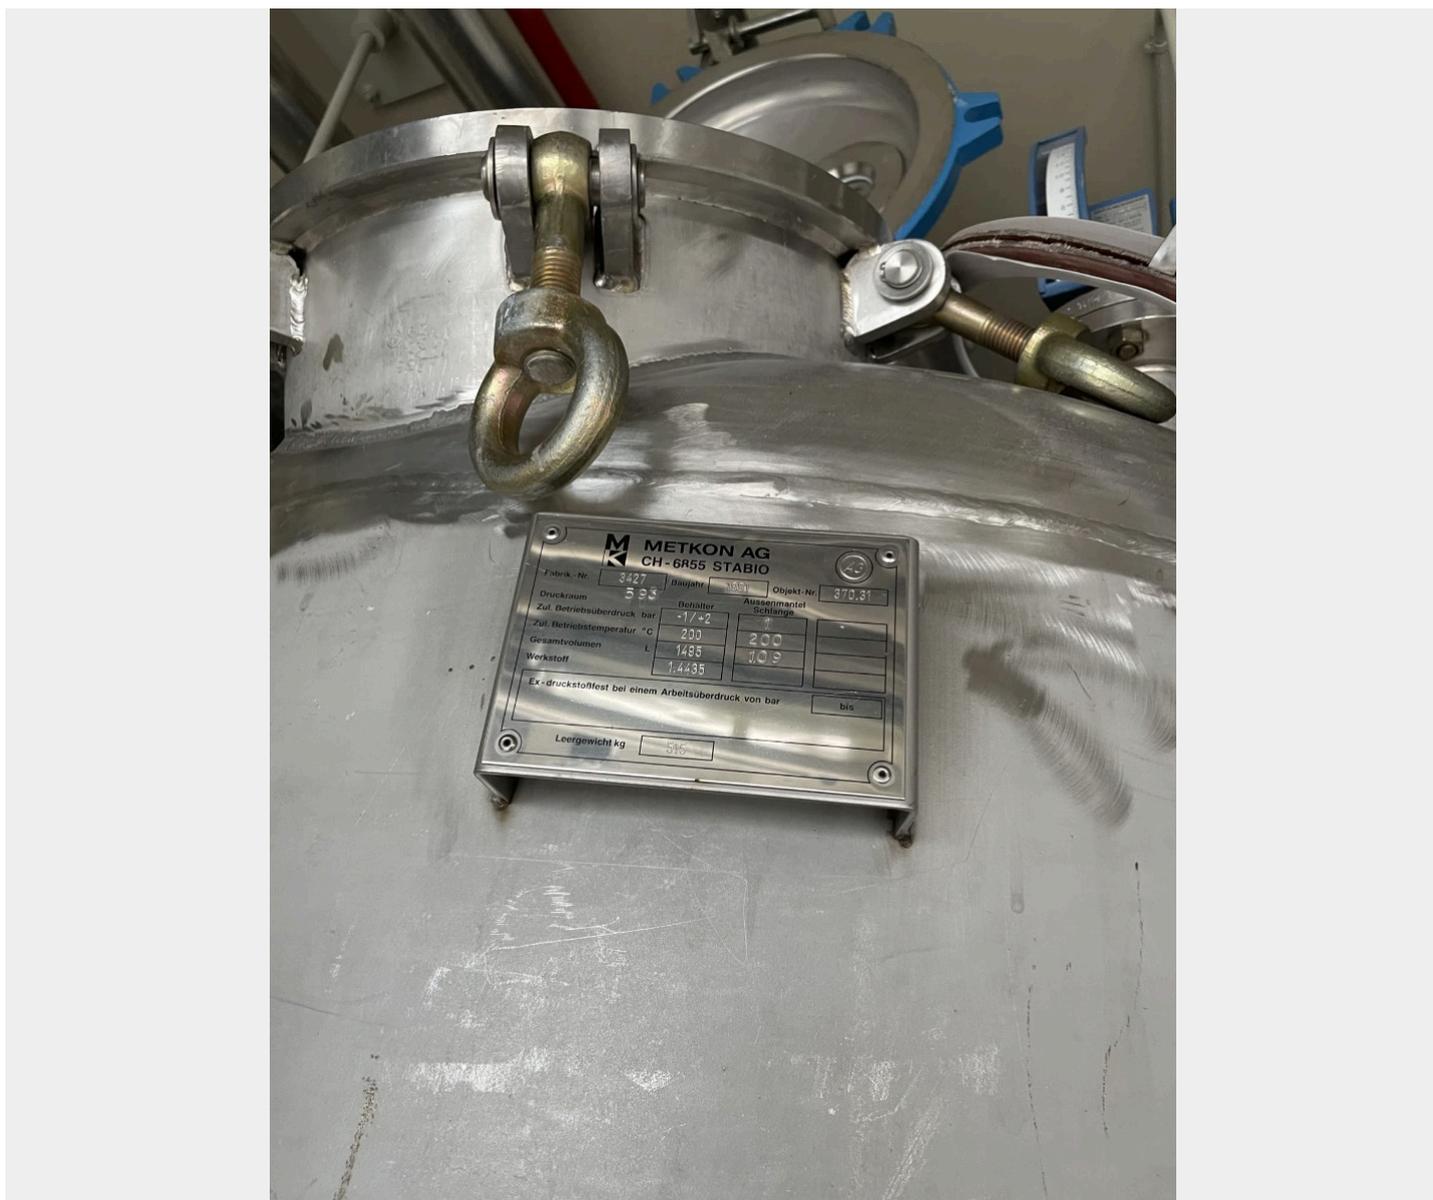

## 93,000,00 kr /st exkl moms

**Additional information:** Pharmaceutical chemistry; 3 support brackets, Aisi 304; double jacket for heating/cooling around the lower bottom and the lower cylinder area; double jacket was welded on later and is not included in the tank drawing; Acceptance certificate for the double jacket and other technical documents available

**Volumetric volume (L):** 1.495 L

**Pressure in tank:** pressure and vacuum

**Max. pressure (Bar):** 2 Bar

**Min. pressure (Bar):** 1 Bar

**Max. temperature (°C):** 200 °C

**Material wet parts:** SS AISI 316 (V4A)

**Model:** vertical

**Configuration:** single jacketed with heat-exchanger

**Heat exchanger:** yes

**Insulation:** no

**Mobile tank:** no

**Total discharge:** yes

**Volume:** 109 L

**Max Overpressure:** 1 Bar

**Max onderdruk:** 1 Bar

**Max. working temperature:** 200 °C

**Type HE on the bottom:** heating/cooling jacket

**Type HE on the cylinder:** heating/cooling jacket

**Heat exchanger:** RVS 316

**Documents included:** no

**Technical drawing included:** no

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Position of manway:** in the bottom

**Outlet of tank:** flange DN50

**Top:** 7 mm

**Cylinder:** 5 mm

**Bottom:** 4,20 mm

**Internal diameter tank:** 1.200 mm

**Outer diameter tank:** 1.300 mm

**Cylinder height:** 980 mm

**Total height of tank:** 2.050 mm

**Empty weight tank:** 600

**SKU:** 282421

Mer information

## Beskrivning av produkt

Material: Syrafast 316

Modell: Vertikal

Nyttillverkad/Begagnad: Begagnad

Arbetsstryck i tank: pressure and vacuum

Konfiguration: single jacketed with heat-exchanger

Max. arbetstemperatur: 200 °C

Mobil tank: Nej

Övrig information: Pharmaceutical chemistry; 3 support brackets, Aisi 304; double jacket for heating/cooling around the lower bottom and the lower cylinder area; double jacket was welded on later and is not included

Övrig information2: in the tank drawing; Acceptance certificate for the double jacket and other technical documents available

Omrörare: Nej

Övertryck: 2 Bar

Total urtappning: Ja

Undertryck (vakuum): 1 Bar

Trycktank: Ja

Uppvärmning/kylning: Ja

Vätskeberörd yta: SS AISI 316 (V4A)

Volym i liter: 1495

## Utrustning

Dokument finns: Nej

Fläns för omrörare: Nej

Märkskylt: Ja

Teknisk ritning finns: Nej

## Översikt material

Material: Syrafast 316



## Dimensioner av tank

Cylinderhöjd: 980 mm  
Invändig diameter: 1.200 mm  
Total höjd: 2.050 mm  
Ytterdiameter: 1.300 mm

## Tjocklek på tank

Botten: 4,20 mm  
Cylinder: 5 mm  
Topp: 7 mm

## Mer

Värmeväxlare: RVS 316  
Isolerad: Nej  
Vikt: 600